

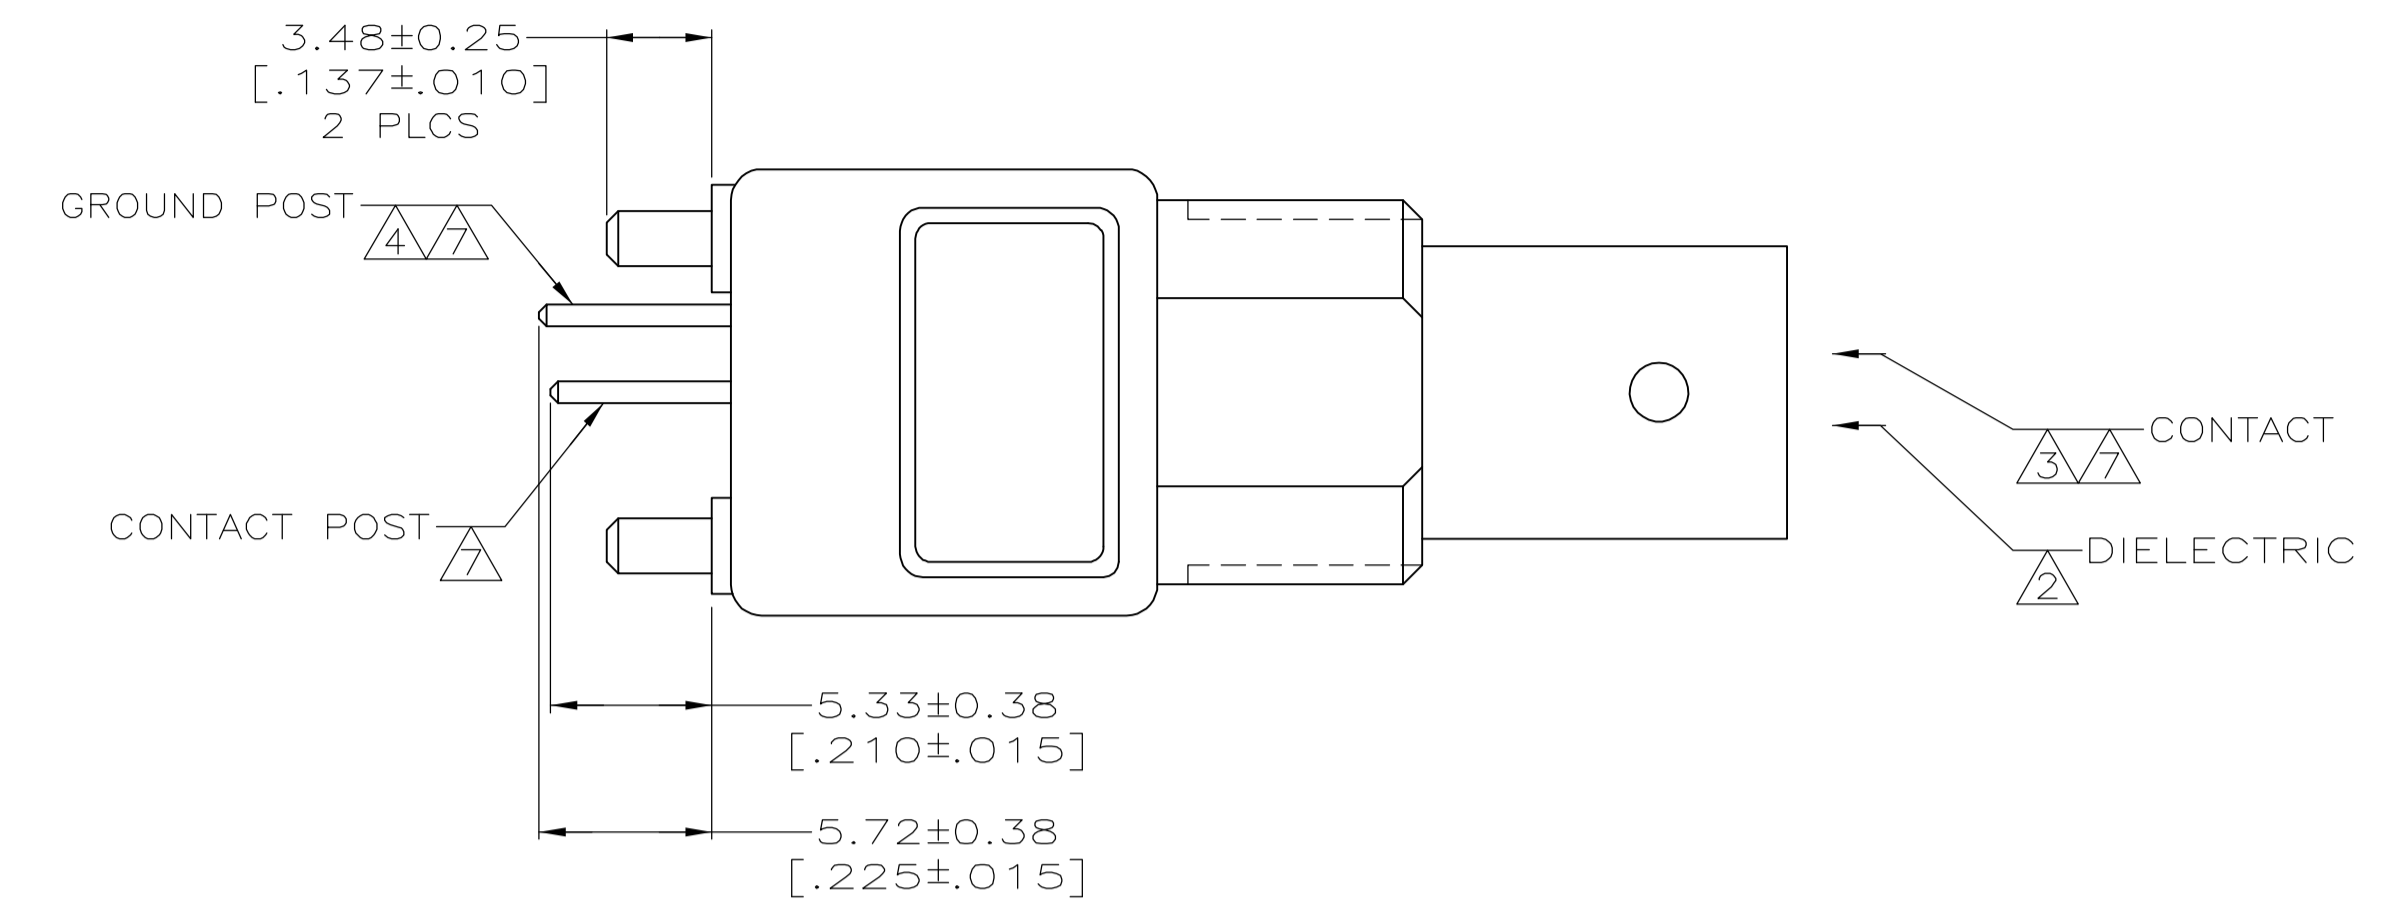
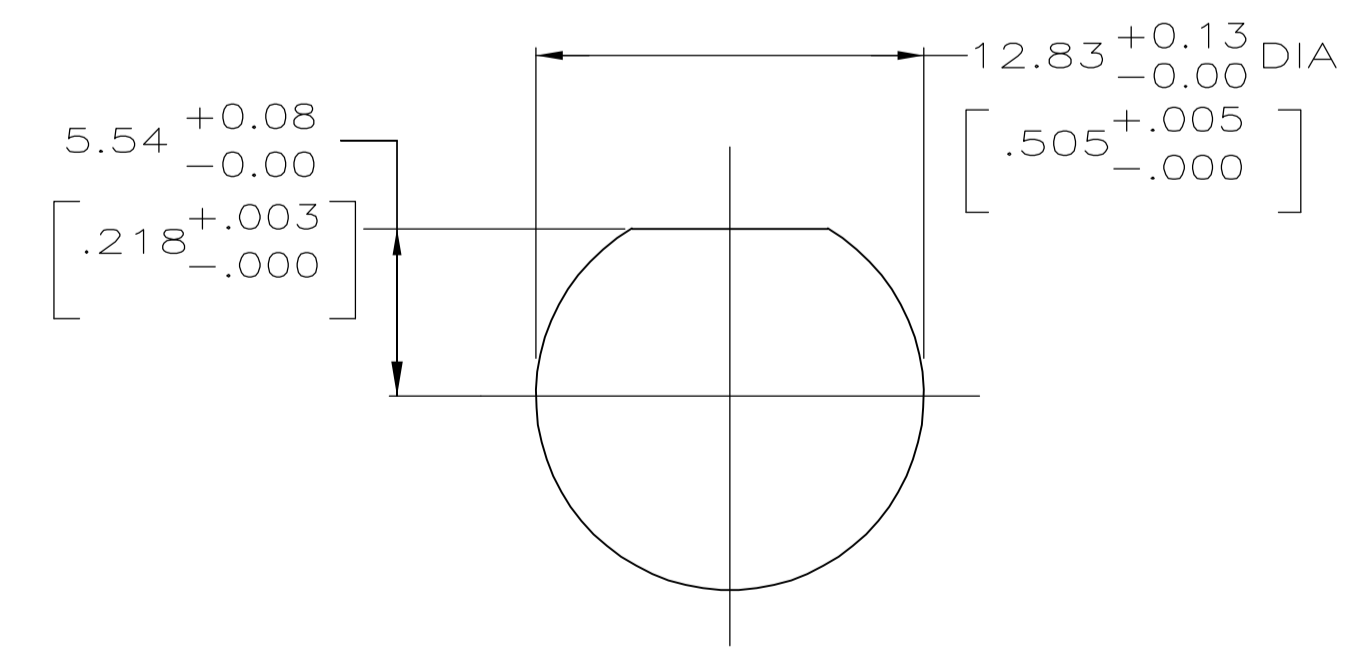



LOC		DIST		REVISIONS				
P	LTR	DATE	DMN	APVO	DESCRIPTION	DATE	DMN	APVO
C		PER EC 0514-0184-04	06JAN04	BM	JL			

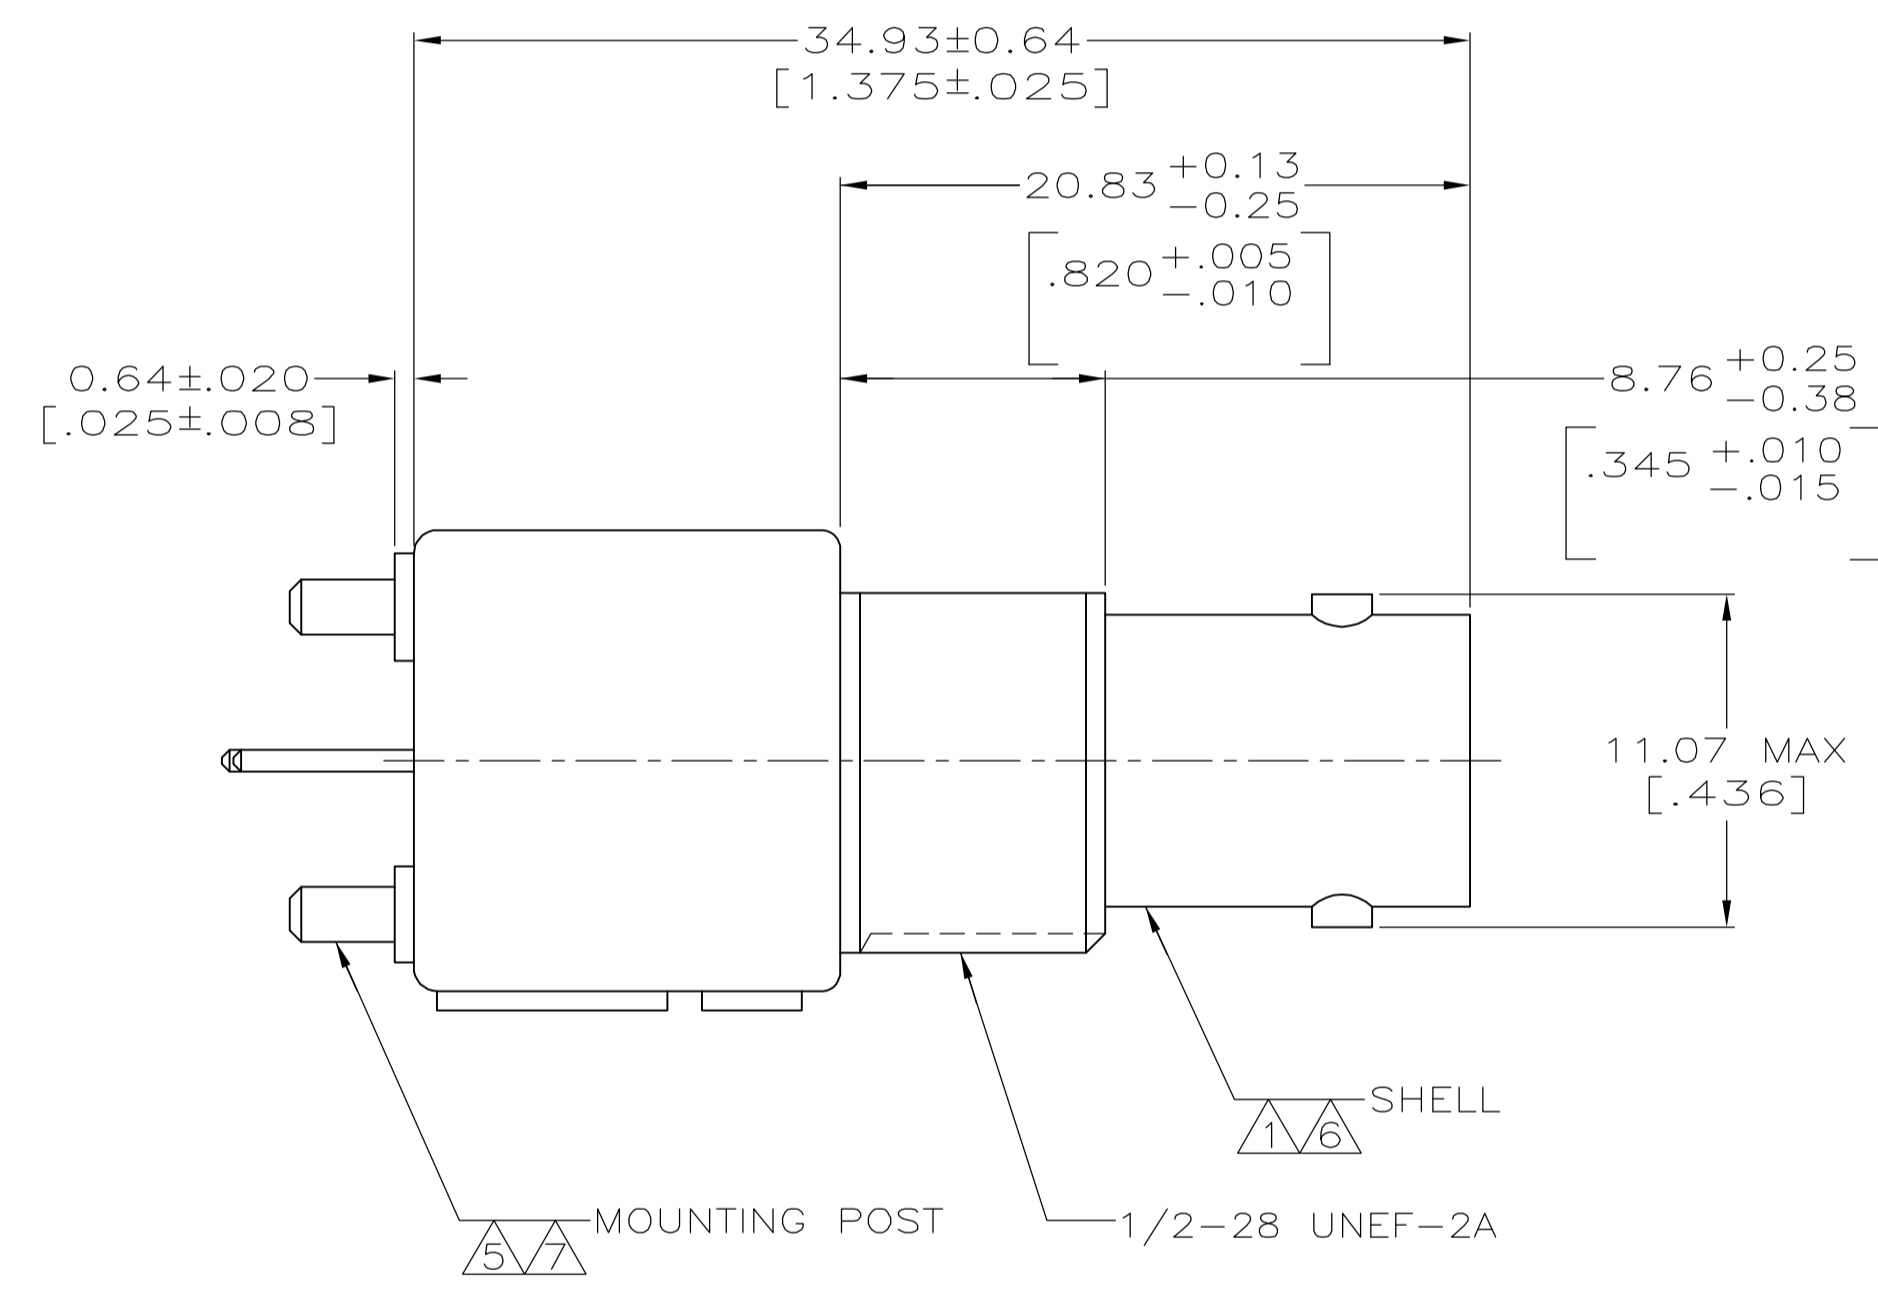

- ① ZINC PER QQ-Z-363.
- ② POLYMETHYLPENTENE PER ASTM-D-1238.
- ③ PHOSPHOR BRONZE PER QQ-B-750.
- ④ BRASS PER ASTM-B-453.
- ⑤ BRASS PER ASTM-B-16.
- ⑥ NICKEL PLATE PER QQ-N-290,  
3.81 μm [.000150] MINIMUM THICK.
- ⑦ TIN PLATE PER ASTM-B-545,  
3.81 μm [.000150] MINIMUM THICK.
- 8. SEE INSTRUCTION SHEET 2769.

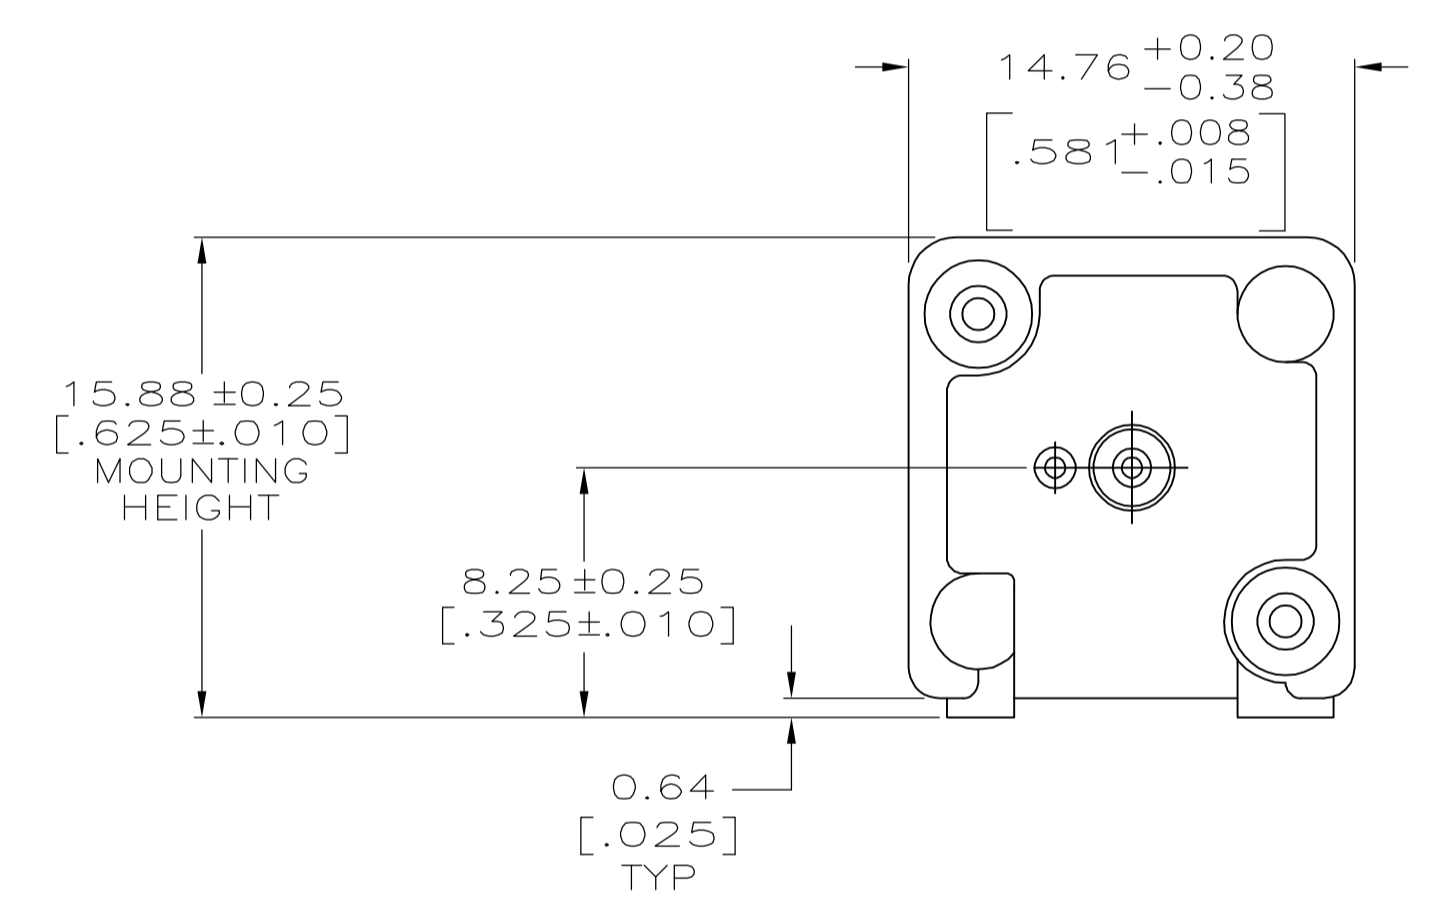

RECOMMENDED PANEL CUTOUT

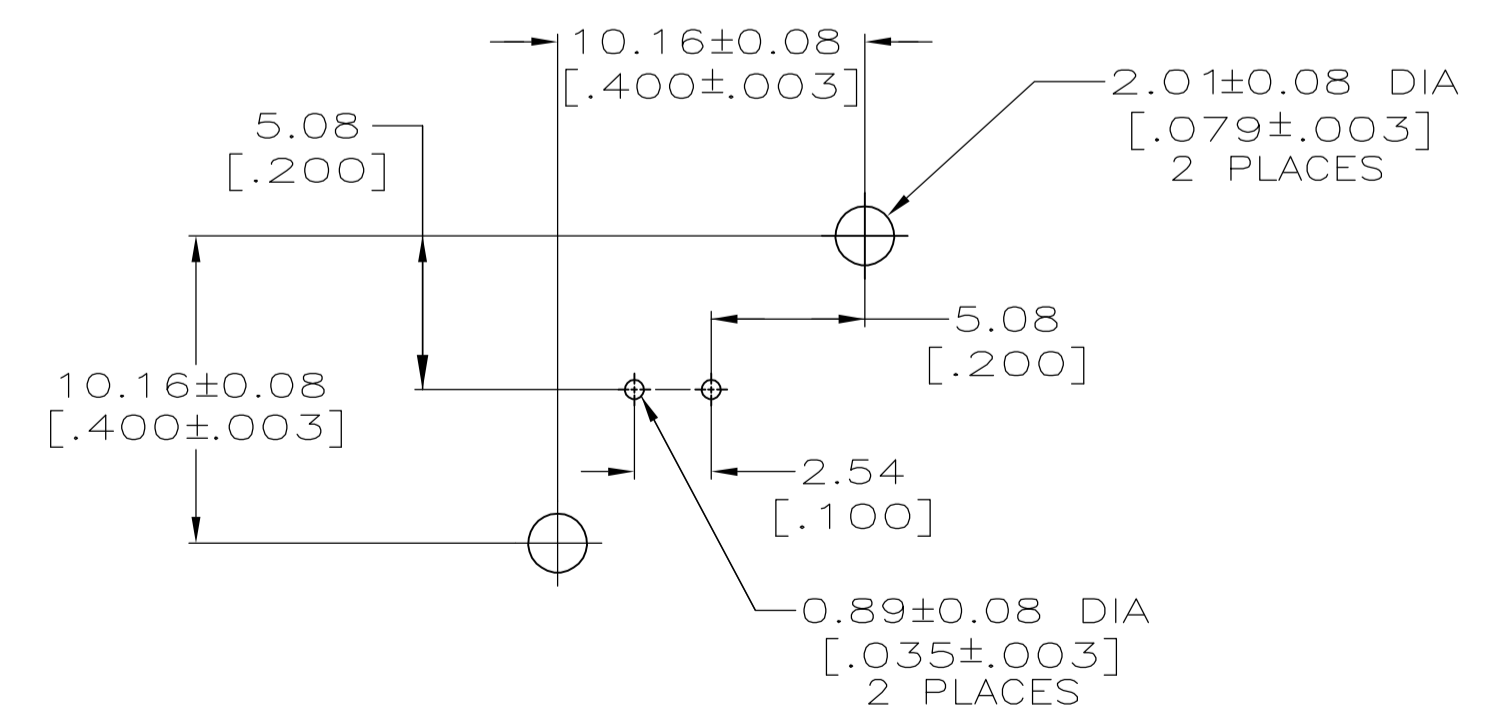

PCB CONFIGURATION

227671-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. LIPPERT 6-30-92	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK A. GABANY 7-2-92	APVO A. GABANY 7-2-92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME JACK, VERTICAL, PCB, 50 OHM, SERIES BNC		
0 PLC ± -		PRODUCT SPEC 108-12078		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± ± 0.05 [.002]		SIZE A1		
3 PLC ± ± -		CAGE CODE 00779		
4 PLC ± ± -		DRAWING NO 227671		
ANGLES ± -		RESTRICTED TO		
MATERIAL SEE NOTES 1-5		WEIGHT -		
FINISH SEE NOTES 6-8		CUSTOMER DRAWING		
		SCALE 4:1		
		SHEET 1 OF 1		
		REV C		