


8 7 6 5 4 3 2 1



This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV.	DESCRIPTION	DATE	APPROVED
-	REL	04/03	-
A	ECO-13227	11/24/20	LA

**NOTES:**

- MATERIALES:
  - SST, 303, PER ASTM A582.
  - BERYLLIUM COPPER PER ASTM B196.
  - OXIDE-NORYL (TM). MIL-P-46129.
  - SILICONE RUBBER PER A-A-59588.
- FINISH:
  - CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE GOLD PLATED PER MIL-G-45204 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ N-290.
  - BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER AMS2700.
- ELECTRICAL SPECIFICATIONS:
  - NOMINAL IMPEDANCE: 50 OHMS.
  - FREQUENCY: DC-40 GHz.
  - VSWR: 1.3 MAX TO 40 GHz.
  - INSERTION LOSS: 32 dB MAX.

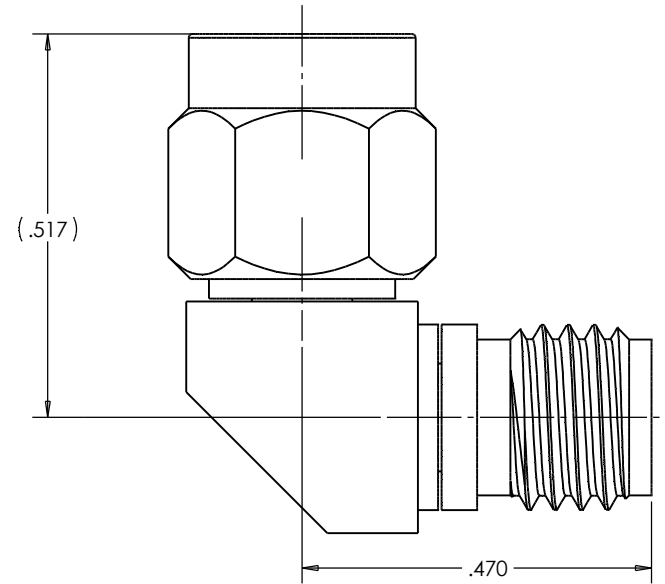

MATERIAL	DO NOT SCALE DRAWING	DRAWN -	DATE 03/04	 <b>Winchester Interconnect</b> 68 Water St Norwalk, CT 06854
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. DCAM	DATE 11/24/20	
COMMENTS:	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±2°	MFG APPR.	DATE	TITLE: 2.9 MM PLUG TO 2.9 MM JACK R/A
		OTHER APPR. LA	DATE 11/24/20	
surface area: sq inch	weight: lbs	THIRD ANGLE PROJECTION 		SIZE <b>B</b>
		DWG. NO. 24-925-2010-90		REV <b>A</b>
		PER ASME Y14.5M-1994		SCALE: 4:1
				SHEET 1 OF 1

**CUSTOMER OUTLINE DRAWING**

8 7 6 5 4 3 2 1