


24-984-0000-90

NOTES:

Materials: SST. corrosion-resistant, 303, per ASTM A582  
 Beryllium Copper per ASTM-B-196.  
 Oxide-Noryl (tm), MIL-P-46129

Finish: Center Conductors and solder components shall be gold plated per MIL-G-45204  
 Type II, Class 1 over Nickel plate per QQ-N-290.  
 Body and Body components shall be passivated per AMS 2700

Frequency: DC-40 GHz  
 VSWR: 1.25 TO 40 GHz

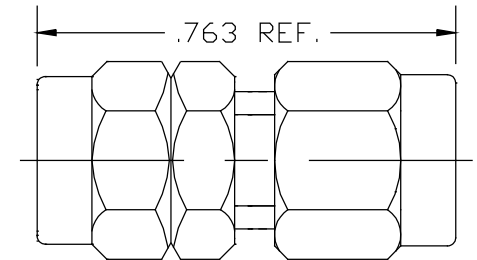

LTR	DESCRIPTION	DATE	APPR.	DRAWN LRH	CHECKED	USED ON	WINCHESTER RF. 3950 DOW RD. MELBOURNE, FL. 32934	
-	REL	12/99		APPR.	SCALE NTS	24-984-0000-90	C:\Users\jvankirk\Desktop\logo.jpg	
A	ECN # 2610	6/12/18		UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.		MATERIAL	TITLE	
				DIMENSIONS ARE IN INCHES TOLERANCES		FINISH	1.85mm PLUG TO 2.9mm PLUG	
				DECIMALS	FRACTIONAL	ANGULAR	SIZE	FSCM NO.
				.X ±.030		.X° ±1°0'	A	OHMO1
				.XX ±.010	± 1/64	.X°X' ±15'		
				.XXX +.005				
							SHEET	DWG. NO.
							1	24-984-0000-90