


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A		ECN-22-152748	11MAY2022	PZ WKH

CAN BE COMPATIBLE WITH ML 51

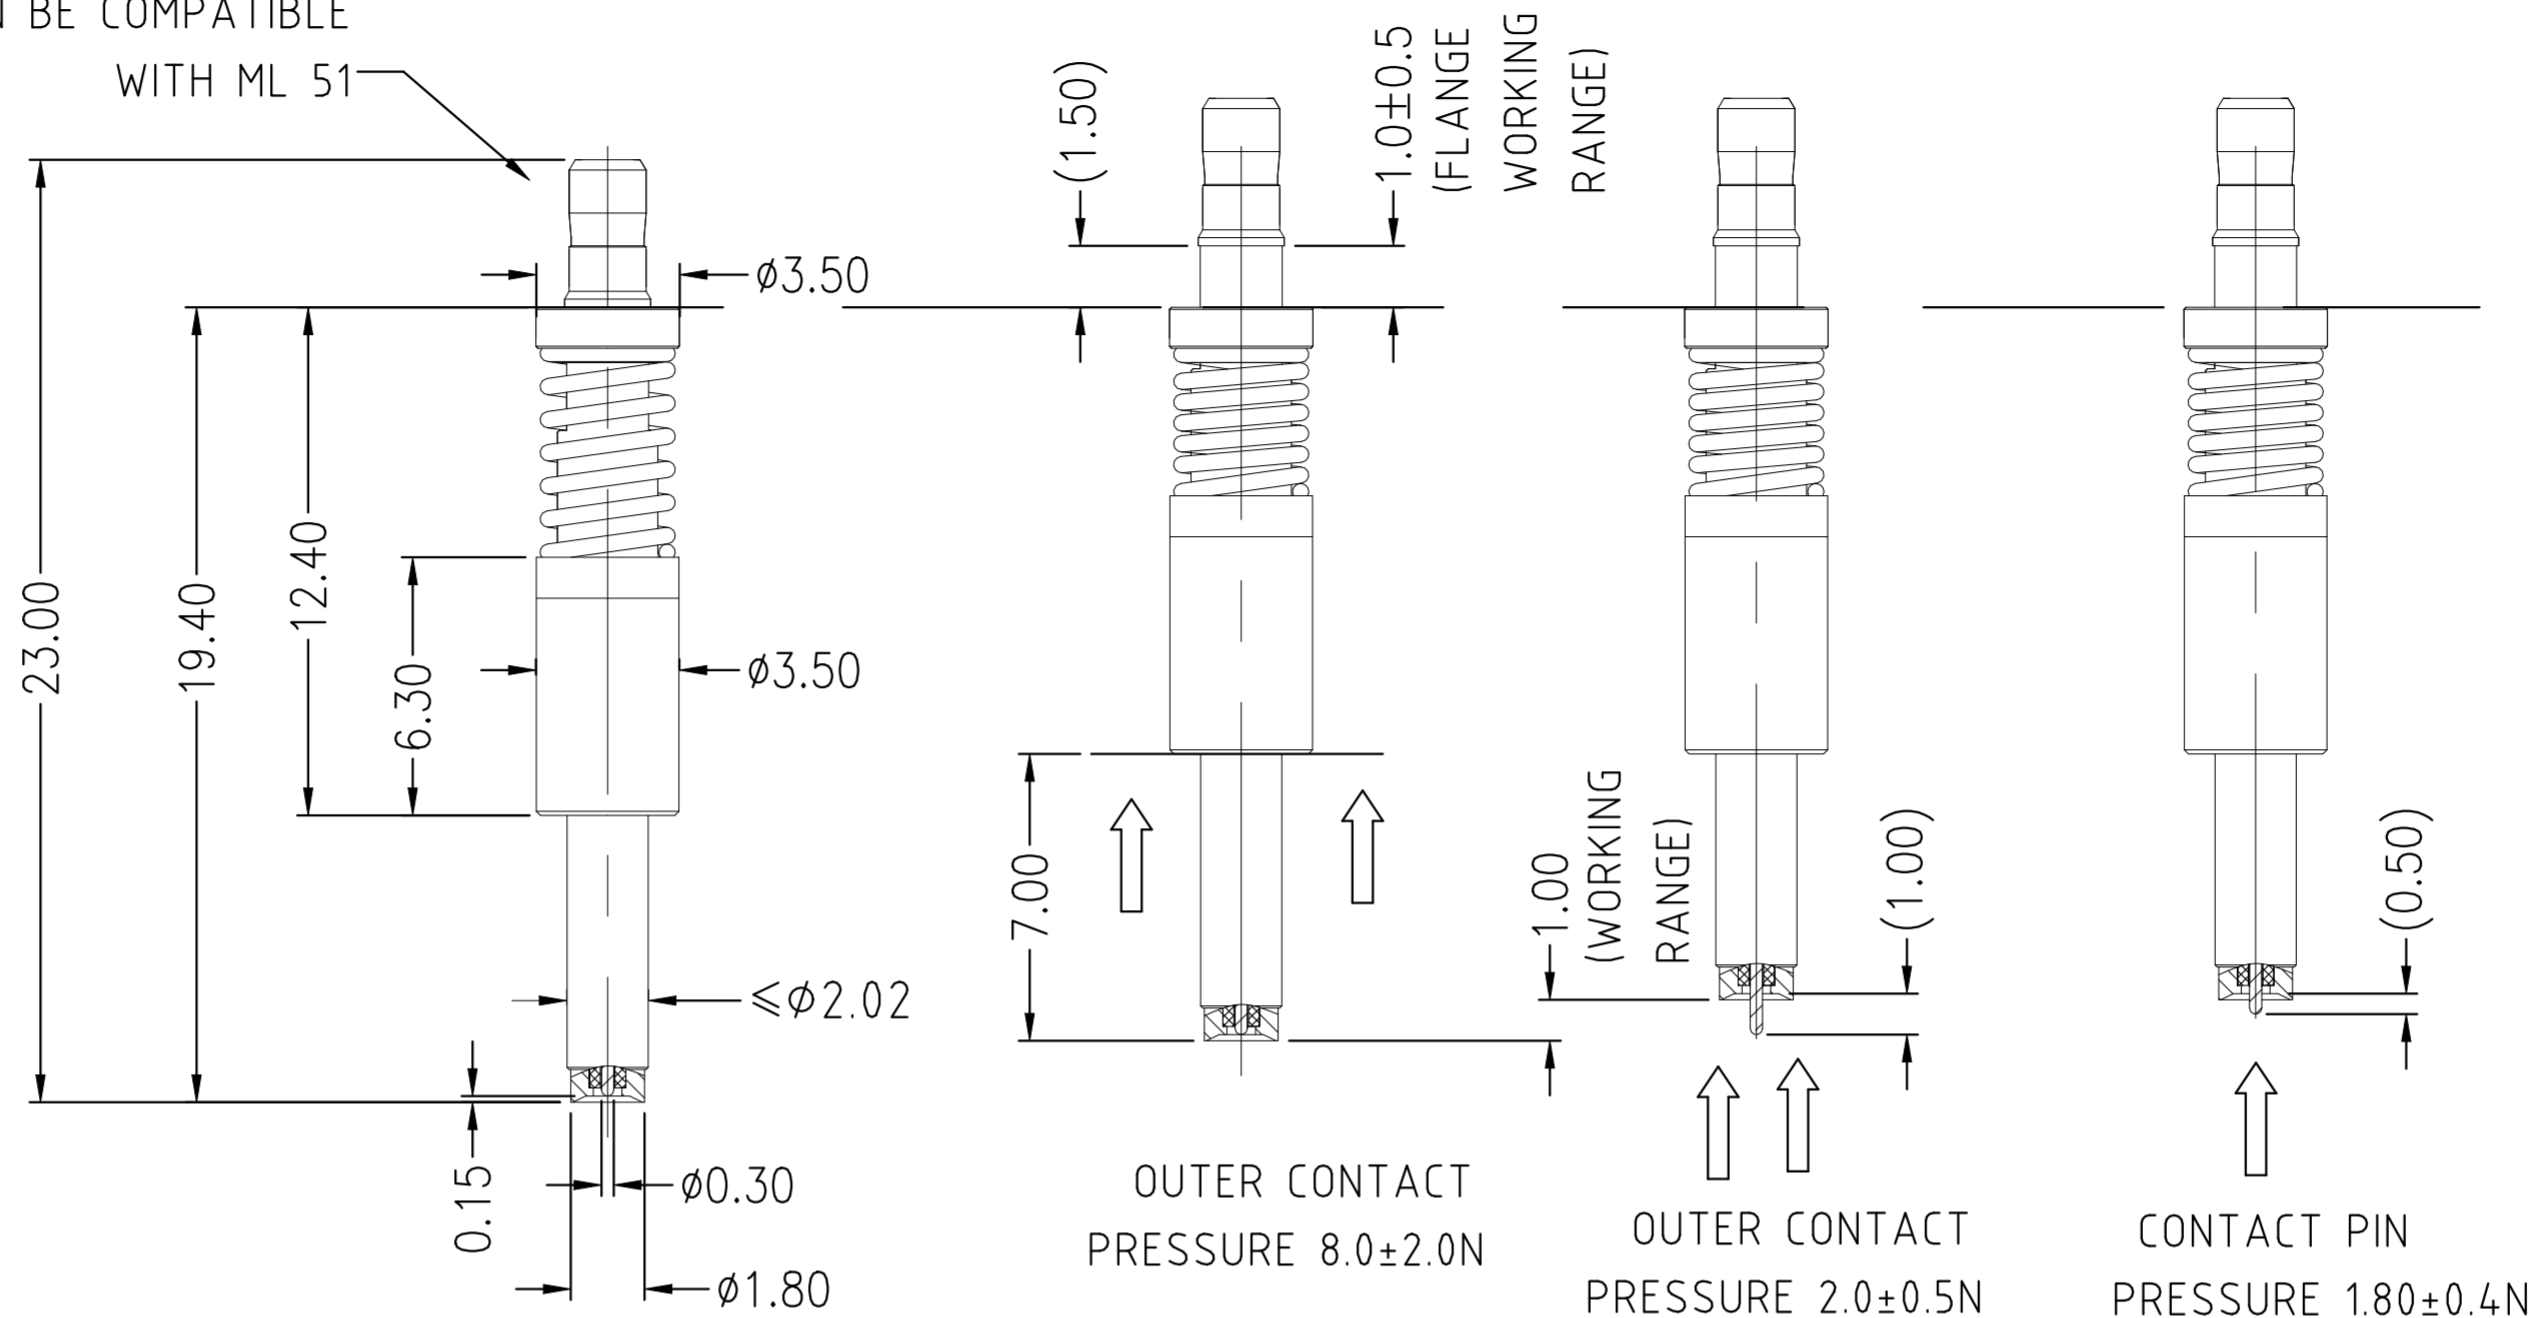

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Impedance (Ohm): <u>50</u> Frequency Range: DC to 9GHz Voltage Rating (Peak) @ Sea Level <u>170 V RMS</u> Insulation Resistance (MIN.) <u>500 M ohms</u> Contact Resistance (mohms MAX) Center Contact <u>50</u> Outer Contact <u>20</u> Dielectric Withstand Voltage: <u>500 V RMS Max</u> Insertion Loss : <0.6 dB @0-6GHz <0.8 dB @6-9GHz VSWR: <u>1.3 max @ DC ~ 6GHz</u> <u>1.5 max @ 6GHz~9GHz</u>	Interface Dimension <u>V SWITCH</u> Force to Engage and Disengage Engage: <u>N/A</u> Disengage: <u>N/A</u> CONDUCTOR ELASTICITY: FLANGE ELASTICITY(PRESS 1.0±0.5mm ) <u>600gf~1000gf</u> OUTER CONDUCTOR ELASTICITY(PRESS 1.0±0.05mm ) <u>150gf~250gf</u> INNER CONDUCTOR ELASTICITY(PRESS 0.6±0.05mm ) <u>230gf~310gf</u> Cable Retention Axial (Lbs) <u>N/A</u> Mating cycles <u>10000</u> cycles (V SWITCH)	TEMPERATURE RANGE -40 °C~+85 °C ROHS <u>COMPLIANT</u>

<b>2408020-1</b>	SPRING	STAINLESS STEEL	PASSIVATION
	CONTACT PIN	BERYLLIUM COPPER	PL.GOLD/NICKEL/COPPER
	INSULATOR	PTFE MIL-P-19468	N/A
	BODY	STAINLESS STEEL	PASSIVATION
	PART NUMBER	MATERIAL	PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	18FEB2022	<b>TE</b> TE Connectivity			
		CHK	18FEB2022				
		APVD	18FEB2022				
		PRODUCT SPEC					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		TEST PROBE FOR RF SWITCH 5 ADAPTOR			
		0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.1 4 PLC ± - ANGLES ± 5°					
MATERIAL	FINISH	WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A2	00779	C=2408020	
CUSTOMER DRAWING				SCALE	SHEET	REV	
				1:1	1 of 1	A	