


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/10/07	-	INITIAL RELEASE
A	08/19/08	100047	ADD "50 ohms" TO PART DESCRIPTION

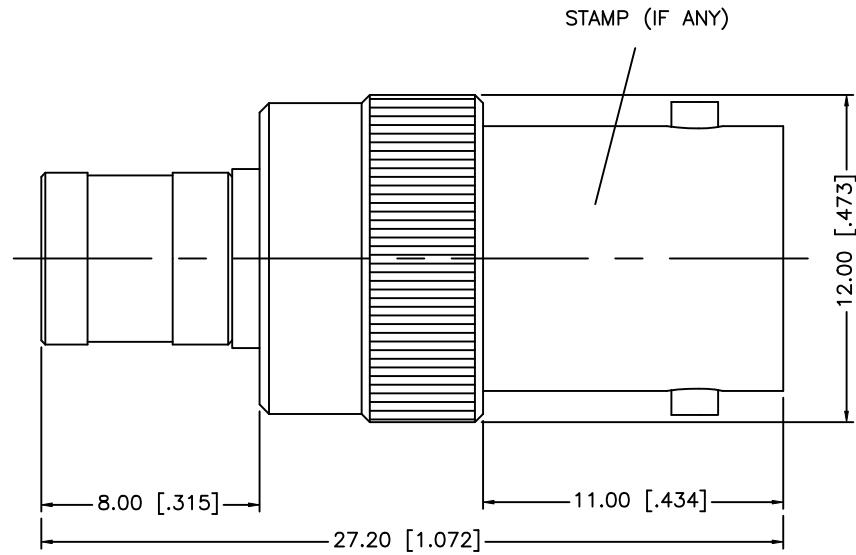

8				<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	<h1 style="color: blue;">Amphenol Connex</h1>		
7					DRAWN	GRS		08/19/08	
6					CHECKED				
5					ISSUED				
4	CONTACT PIN	BER. COPPER	GOLD		1	SHEET		1 OF 1	
3	INSULATOR	PTFE	NATURAL	1	PART DESCRIPTION		BNC JACK TO SMB PLUG ADAPTER - 50 ohms		
2	SMB BODY	BRASS	GOLD	1	PART NO.			242185	
1	BNC BODY	BRASS	NICKEL	1	DWG. NO.		242185.DWG		
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE	C:/242/242185.DWG	REV. A	SIZE A	SCALE NA