

8 7 6 5 4 3 2 1

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APRD
A	DRAW PER CAD ONLY ER077085	04/08/2019	ASNZ

NOTES:

MATERIALS:


STAINLESS STEEL 303 PER ASTM A484 AND A582.
 BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530
 OXIDE-NORYL (tm), MIL-P-46129.


FINISH:

CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204.
 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.
 BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER ASTM A380.

ELECTRICAL:

FREQUENCY: DC - 40GHz
 VSWR: 1.25 TO 40GHz.
 INSERTION LOSS: .05√f(GHz)

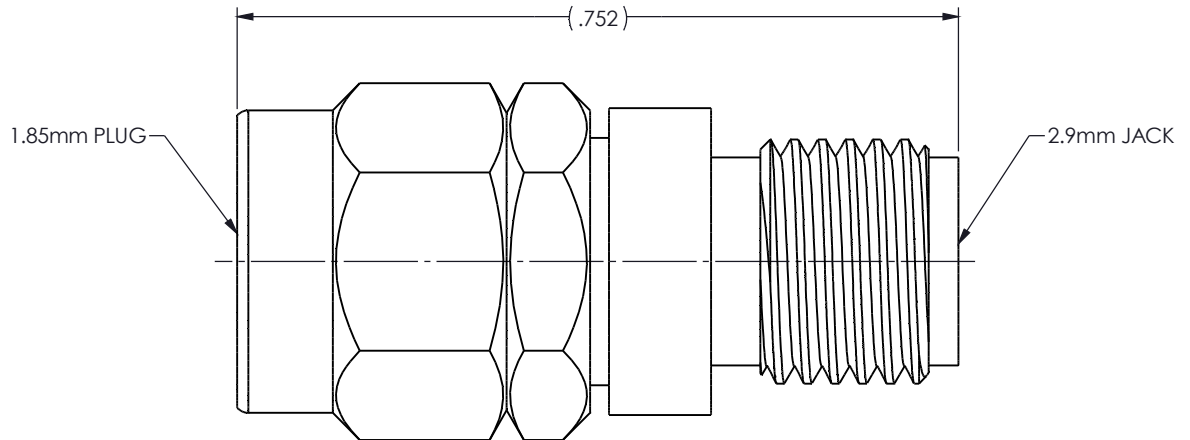

DO NOT SCALE DRAWING	DRAWN LMW	DATE 05/03	 Winchester Interconnect. 245 Lynnfield St. Peabody, MA 01960		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR.	DATE			
	MFG APPR.	DATE			
	OTHER APPR. tcoverstone	DATE			
TOLERANCES: FRACTIONS: ±1/64 .X : ±.030 .XX : ±.010 .XXX : ±.005 ANGLES: X° : ±1° X°X' : ±15' MACHINED SURFACES: 32/	THIRD ANGLE PROJECTION	TITLE: 2.9mm JACK TO 1.85mm PLUG	SIZE B	DWG. NO. 25-984-0000-90	REV A
		PER ASME Y14.5M-1994	SCALE: 8:1	SHEET 1 OF 1	

8 7 6 5 4 3 2 1