

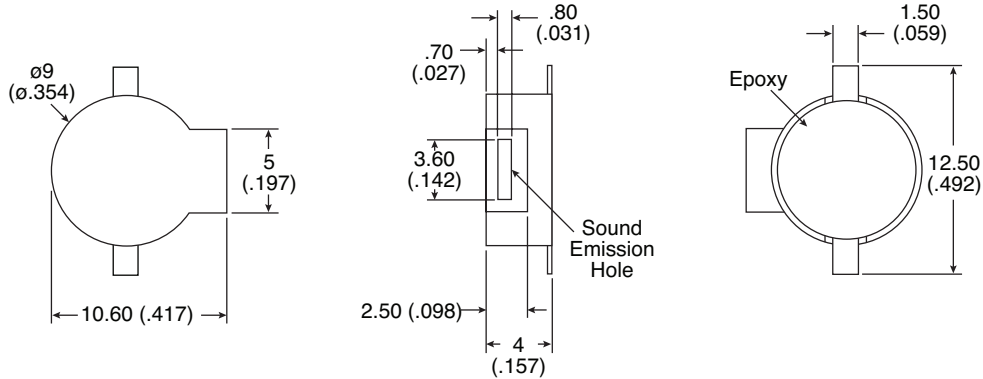


Part Number:

254-MB553-RO



Magnetic Transducer (SMT)

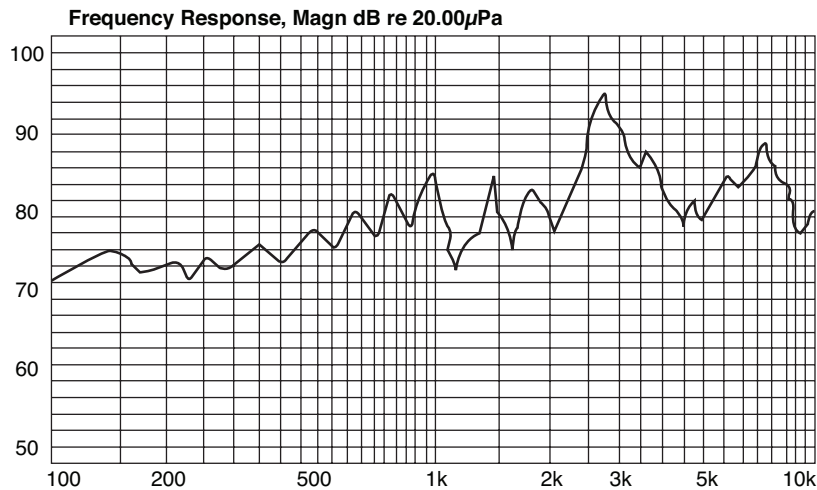

KT-400416

Electrical Specifications:

- Rated Voltage: 5.0VDC
- Operating Voltage: 4-6 V
- Resonant Frequency: 2730Hz
- Sound Pressure Level: 85dB min.
- Average Current Consumption: 80mA max.
- Coil Resistance: 30 \pm 5 Ω

Mechanical Specifications:

- Operating Temperature: -30°C ~ +70°C
- Storage Temperature: -40°C ~ +85°C

Materials:

- Housing: LCP
- Weight: 1g

Soldering Specifications:

- Hand Soldering
- Iron Tip/Temperature: +380°C Max
- Soldering Time: Duration is less than 3 seconds

Note:

- RoHS compliant by exemption