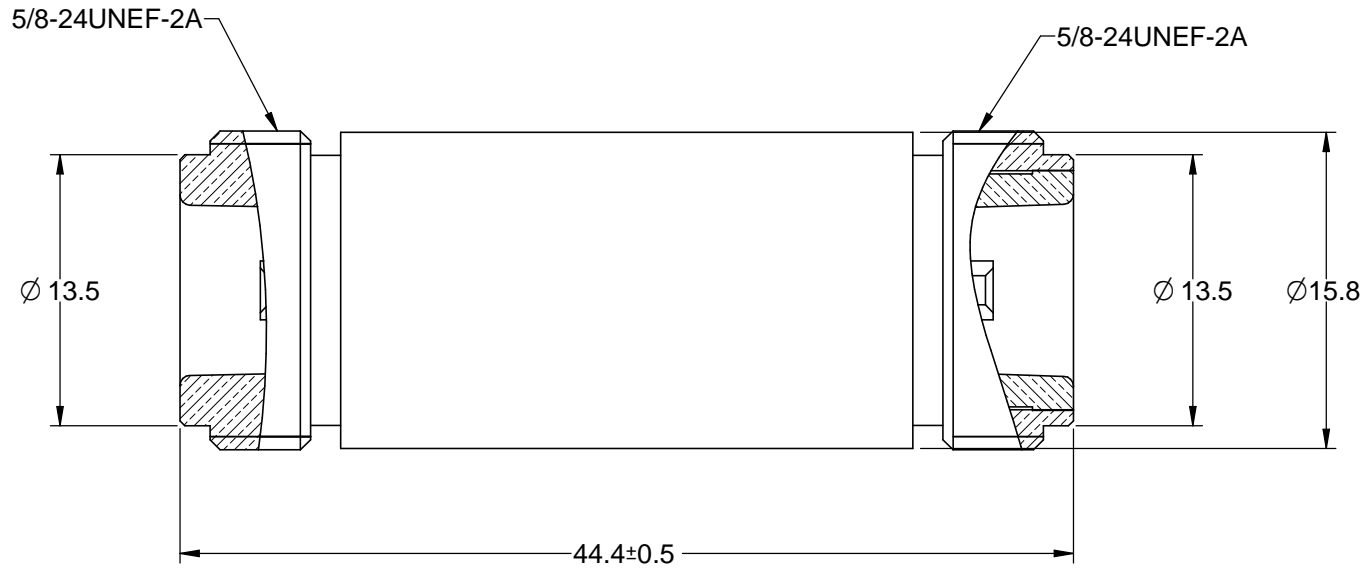






DESCRIPTION: (CPAD850) N(F-F) SPLICE UG-29B/U
 MODEL NUMBER: 26-8010
 APPLICATION: ADAPTER
 CRIMP TOOL: N/A
 IMPEDANCE: N/A
 FREQUENCY RANGE: N/A
 MATERIAL: BODY BRASS NICKEL PLATED
 INSULATOR POM
 CONTACT BRASS NICKEL PLATED
 RoHS COMPLIANCE: YES
 TECHNICAL DETAIL: REFER TO CINCH DOCUMENT P/N 26-0000



| | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------|
|  <small>© 2015 Cinch</small> <small>This PROPRIETARY document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be copied or reprinted without permission and is returnable upon demand.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</small> | <small>3RD ANGLE PROJECTION</small>  | AIM-Cambridge | |
| | RoHS2 <input checked="" type="checkbox"/> 2011/65/EU | Title: (CPAD850) Type N (Jack/Jack) Splice, UG/29B/U, Adapter | |
| <small>UNLESS OTHERWISE SPECIFIED UNITS: METRIC</small> .X ±.3 .XX ±.10 ANGLES ±2° | Model No. 26-8010 | | |
| Size A | DO NOT SCALE DRAWING | Date: 2015/6/24 | Sheet 1 of 1 |