

Description: BNC male crimp dual ferrule for RG58/59

Part No: 27-9010

Application: For Cable RG58, RG59, RG59 PLENUM

Crimp Tool: 24-9960P

Impedance: 50 Ohms

Frequency Range: 0-4 GHz

Temperature Range: -55°C TO +85°C



Material:

Body	Brass Nickel plated
Contact	Phos Bronze Gold plated
Insulator	Delrin
Crimp Sleeve	Brass Nickel plated
Coupling Nut	Zinc Nickel plated

RoHS Compliance: Yes

Technical Detail: Refer to AIM-Cambridge Document P/N 27-0000

REV	ECO	DATE
1	OFFICAL RELEASE	2009/03/11

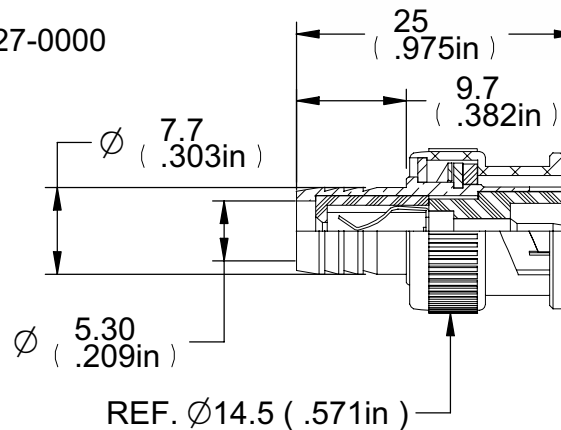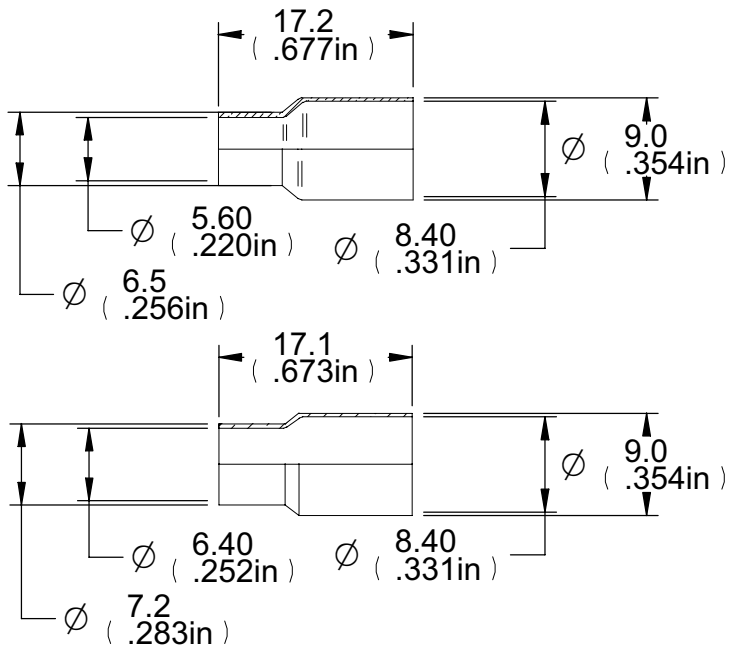

### DIM OUTLINE

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not tracked or coded without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.</p>	Model No.	27-9010-CUST	AIM-Cambridge	
	RoHS (EU)/2015/863 COMPLIANT	Cage Code	N/A	
	UNLESS OTHERWISE SPECIFIED UNITS: MM X ±.5 X ±.3 .XX ±.10 ANGLES ±.5°	3RD ANGLE PROJECTION	Title: BNC MALE CRIMP DUAL FERRULE FOR RG58/59	
	Drawn by: JEAN.JIN	Date: 2009/03/11	Drawing No. 27-9010-CUST	Rev. 1
Size A	DO NOT SCALE DRAWING	Workmanship Std: N/A	Sheet 1 of 1	