


PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	ITEM ④ CRIMP SLEEVE	ITEM ⑤ CUPLING NUT
27-9105	BRASS NICKEL PLATED	BRASS GOLD PLATED	DELTRIN	BRASS NICKEL PLATED	ZINC NICKEL PLATED


受控 CONTROLLED DOCUMENT

编号 P/N	27-9105	版本 Rev	01	日期 Rel'd Date	May8,09
-----------	---------	-----------	----	------------------	---------

DRAWING NO. 27-9105	
REVISIONS	
01	OFFICIAL RELEASE
04-05-09	T W T
<small>Thomas Chow 2009.05.04 144132 -05'00'</small>	

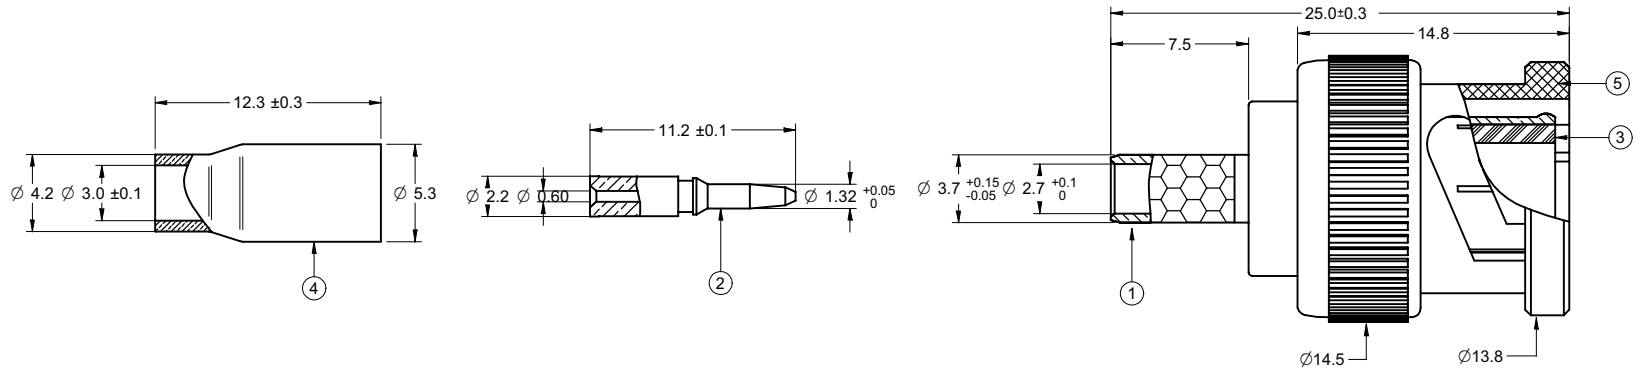

- NOTES:
1. IMPEDANCE: 50 OHMS NOMINAL
 2. FREQUENCY RANGE: 0-4 GHz
 3. CABLE ACCEPTABILITY: RG174, RG187, RG188, RG316
 4. CABLE RETENTION: 20lbs MIN
 5. RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85°C
 6. FURTHER TECHNICAL DETAIL: REFER TO EMERSON DOCUMENT P/N 27-0000

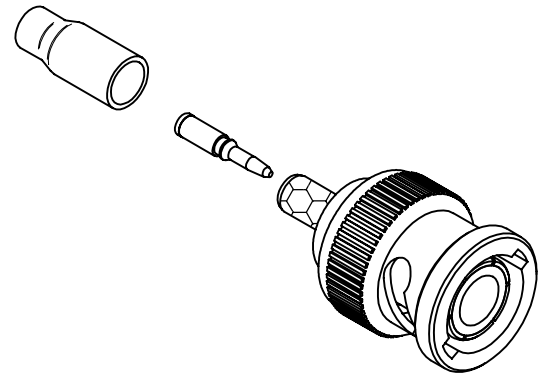

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY TERRY.W	DATE 04-05-09
DECIMALS	mm	CHECKED BY TERRY.W	DATE 04-05-09
X	± 0.5	APPROVED BY THOMAS	DATE 04-05-09
X.X	± 0.2	U/M	mm
X.XX	± 0.05		
ANGLES	± 0.5°		

EMERSON Network Power		Connectivity Solutions	
TITLE BNC MALE CRIMP FOR RG174/U			
SHEET 1 OF 1	DRAWING NO. 27-9105	SIZE C	

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.