

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APRD
A	ECO-100565	07/02/2019	ASNZ

NOTES:

MATERIAL:


STAINLESS STEEL 303 PER ASTM A484 AND A582.
 BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530
 OXIDE-NORYL (tm), MIL-P-46129,
 PTFE FLUOROCARBON PER ASTM-D-1710 TYPE 1.



FINISH:

CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204.
 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.
 BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER ASTM-A380

ELECTRICAL FEATURES:

FREQUENCY: DC-27 GHz.
 VSWR: 1.20:1 MAX AT 27 GHz.
 INSERTION LOSS: .05√F(GHz) dB.

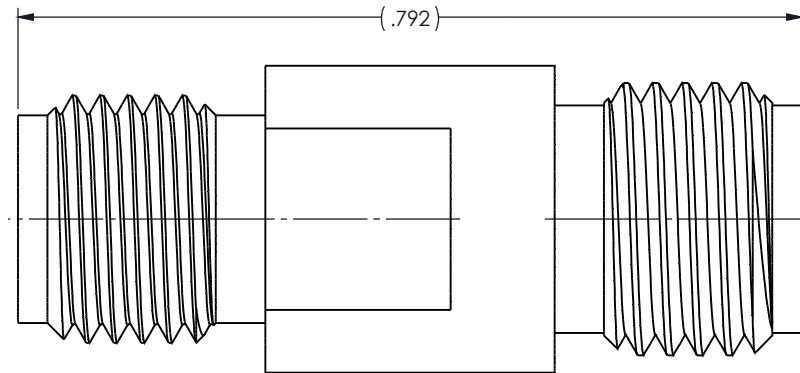

DO NOT SCALE DRAWING	DRAWN LMW	DATE 03/00	 Winchester Interconnect. 245 Lynnfield St. Peabody, MA 01960		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR.	DATE			
	MFG APPR.	DATE			
	OTHER APPR. dcamello	DATE			
TOLERANCES: FRACTIONS: ±1/64 X: ±.030 XX: ±.01 XXX: ±.005 ANGLES: X°: ±1° X°X': ±15' MACHINED SURFACES: 32/	THIRD ANGLE PROJECTION		TITLE: 2.4 mm JACK TO SMA JACK		
SIZE B	DWG. NO. 27-921-0000-00	REV A	PER ASME Y14.5M-1994	SCALE: 8:1	SHEET 1 OF 1