


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	232 Ω	511 Ω	627 Ω
Minimum	- Ω	409 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

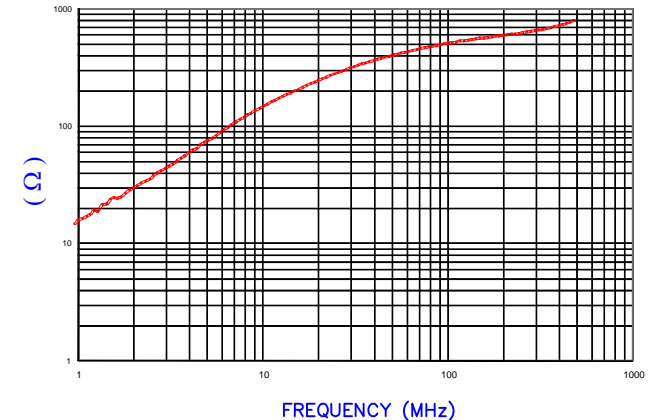

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 3839

NOTES:

1. ASSEMBLED PART #: 28A0592-0A2
2. CASE COLOR: BLACK-0A2.
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon
5. CORE DIMENSIONS REFER TO 28A0592-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
6. COSMETIC SPECIFICATION REFER TO WI-QA-038.

UNCONTROLLED DOCUMENT

CASE DIMENSIONS:

A	18.75 [.738]	+	1.00 [.039]
B	5.04 [.198]	+	1.00 [.039]
C	53.39 [2.102]	+	2.00 [.079]
D	18.75 [.738]	+	1.00 [.039]
E	1.95 [.077]	+	REF.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.					
REV	DESCRIPTION	DATE	INT						
H	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 5&6	01/13/14	Jcai	PROJECT/PART NUMBER: 28A0592-0A2			REV H	PART TYPE: FERRITE SNAP-ON	DRAWN BY: TMB
G	UPDATED Z SPEC	09/03/12	Jcai	DATE:	03/23/04	SCALE:	N.T.S.	MATERIAL:	Ferrite
F	UPDATED NOTE 3	09/15/10	JUN	CAD #	28A0592-0A2-H	TOOL #	-		
E	UPDATE COMPANY LOGO ADD NOTES 3&4	01/27/09	JRK						
D	UPDATE 100MHz MINIMUM VALUE	06/26/07	TMB						
C	UPDATE COMPANY LOGO	04/17/07	TMB						
REV	DESCRIPTION	DATE	INT						