




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #82	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 13/11/14/
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 18/21/02
EUT:	Engineer Signature: PEI
Mode: TX 433MHz	Distance: 3m
Model: RFM69HCW-433S2(5dBm)	
Manufacturer:	

Note: -2

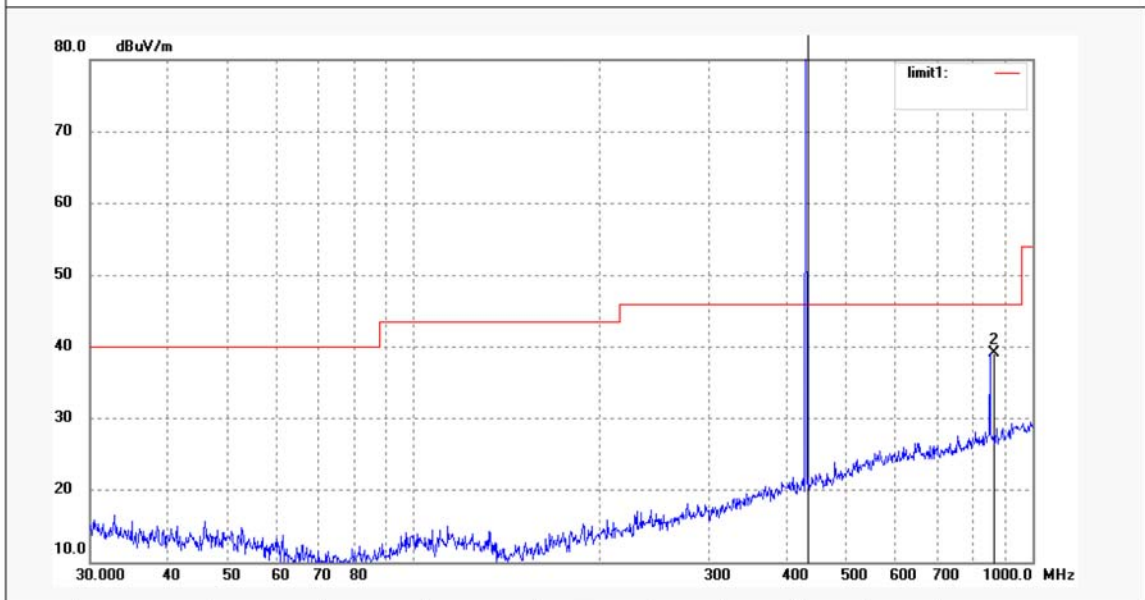

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	104.13	-5.96	98.17	46.00	52.17	peak			
2	867.8300	38.04	1.04	39.08	46.00	-6.92	peak			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #83	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC
3V Test item:	Radiation Test Date:
13/11/14/	
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 18/22/06
EUT:	Engineer Signature: PEI
Mode: TX 433MHz	Distance: 3m
Model: RFM69HCW-433S2(5dBm)	
Manufacturer:	

Note: -2

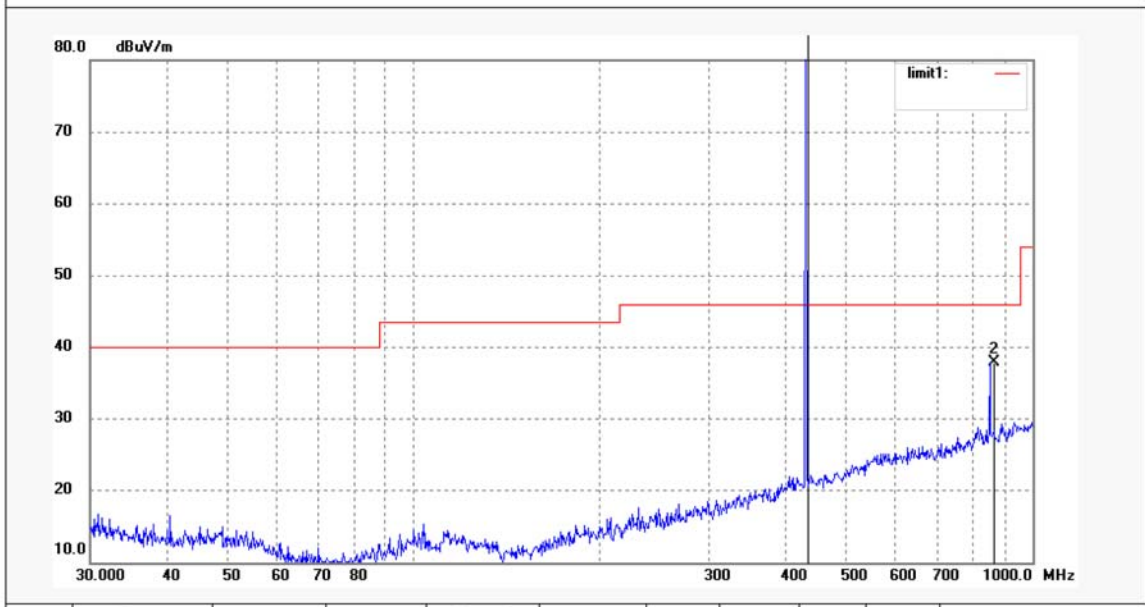

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	104.79	-5.96	98.83	46.00	52.83	peak			
2	867.8300	36.93	1.04	37.97	46.00	-8.03	peak			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #88	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3V
Test item: Radiation Test	Date: 13/11/14/
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 18/38/10
EUT:	Engineer Signature: PEI
Mode: TX 433MHz	Distance: 3m
Model: RFM69HCW-433S2(5dBm)	
Manufacturer:	

Note: -2

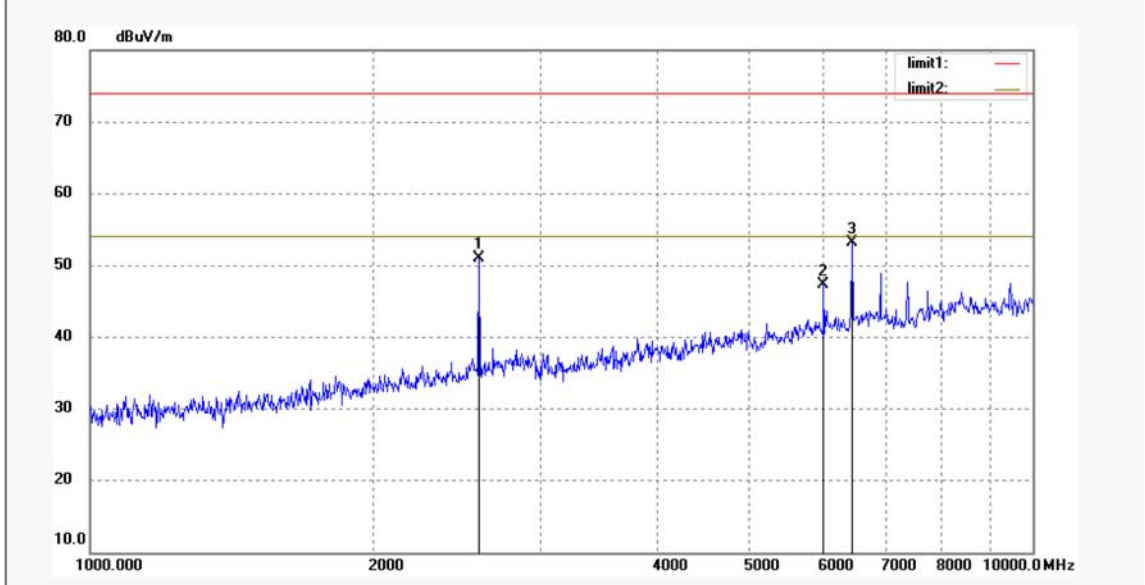

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2587.559	57.87	-6.77	51.10	74.00	-22.90	peak			
2	6004.117	45.06	2.30	47.36	74.00	-26.64	peak			
3	6436.661	50.32	2.77	53.09	74.00	-20.91	peak			