

Description

Single, two and three pole rocker switch/thermal trip free circuit breakers (S-type TO CBE to EN 60934) of compact design for snap-in panel mounting. Available either with protection on one/both/all poles or, in the case of the double pole version, protection on one pole only. Illumination is optional and there is a choice of rocker colours. Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Motors, transformers, solenoids, household and office machines, electrical tools, mobile homes, boats, construction vehicles, medical equipment to EN 60601.

Features and benefits

- Single pole, double pole or three-pole thermal circuit breaker/switch combination
- Voltage ratings AC 240 V; 3 AC 415 V; DC 50 V
- Can be combined with X3120 Power Entry Module. Please refer to the respective section in this document.

Approvals



Compliances



1-pole

3130

3-pole

Your benefits

- Maximum equipment availability is ensured by overload protection perfectly matched with the loads (prevention of nuisance tripping) and quick resettability
- Reduced mounting and wiring time
- Less space requirement
- Less disposition and storage costs
- Enhanced overall reliability

Information online

The current data sheet is available on our website:
www.e-t-a.de/d001

Technical data

For further details please see: www.e-t-a.de/ti_e

| | |
|-----------------|--|
| Voltage rating | AC 240 V; 3 AC 415 V; DC 50 V (UL: AC 250 V; 3 AC 250 V; DC 50 V) |
| Current ratings | 0.1...20 A 1-pole 0.1...16 A 2- and 3-pole |

Typical life 1-pole (IEC/EN 60934)

| | | |
|-----------|------------|---|
| AC 240 V: | 0.1...20 A | 30,000 operations at 1 x I _N , inductive |
| DC 50 V: | 0.1...4 A | 30,000 operations at 1 x I _N , inductive |
| | 4.5...16 A | 30,000 operations at 1 x I _N , resistive |
| DC 28 V: | 0.1...20 A | 30,000 operations at 1 x I _N , inductive |

Typical life 2-pole (IEC/EN 60934)

| | | |
|-----------|------------|---|
| AC 240 V: | 0.1...16 A | 50,000 operations at 1 x I _N , inductive |
| DC 50 V: | 0.1...16 A | 50,000 operations at 1 x I _N , inductive |

Typical life 3-pole (IEC/EN 60934)

| | | |
|-------------|------------|---|
| 3 AC 415 V: | 0.1...16 A | 30,000 operations at 1 x I _N , inductive |
|-------------|------------|---|

| | | |
|---|---|--------------------------|
| Ambient temperature | -30...+60 °C (-22...+140 °F) | |
| Insulation co-ordination (IEC 60664 and 60664 A) | rated impulse withstand voltage 2.5 kV reinforced insulation in operating area | pollution degree 2 |

| | |
|--|--------------|
| Dielectric strength (IEC 60664 and 60664 A) | test voltage |
| operating area | AC 3,000 V |
| current path/current path | AC 1,500 V |





| | |
|-----------------------|---------------------|
| Insulation resistance | > 100 MΩ (DC 500 V) |
|-----------------------|---------------------|

| Interrupting capacity I _{CN} (EN 60934) | | | |
|--|------------|---------------------|---------------------|
| | IN | UN | I _{CN} |
| 1, 2, 3-pole | 0.1...2 A | AC 240 V/3 AC 415 V | 10 x I _N |
| 1 pole | 2.5...20 A | AC 240 V | 200 A |
| 2 pole | 2.5...16 A | AC 240 V | 300 A |
| 3 pole | 2.5...12 A | 3 AC 415 V | 150 A |
| 3 pole | 14...16 A | 3 AC 415 V | 130 A |

Technical data

| Rupture capacity I _{NC} (UL1077) | | | |
|---|---|----------------|-----------------|
| | I _N | U _N | I _{nc} |
| 1, 2-pole | 0.1...16 A | AC 250 V | 3 500 A, C, 1 |
| 3-pole | 0.1...12 A | 3 AC 250 V | 5 000 A, C, 1 |
| 1,2-pole | 0.1...16 A | DC 50 V | 2 000 A, C, 1 |
| Degree of protection (IEC 60529/DIN 40050) | operating area IP40 terminal area IP00 | | |
| Vibration | 5 g (57-500 Hz) ± 0.38 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis | | |
| Shock | 1-pole: 25 g (11 ms) 2 + 3-pole: 20 g (11 ms) to IEC 60068-2-27, test Ea | | |
| Corrosion | 96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka | | |
| Humidity | 240 hours at 95 % RH, to IEC 60068-2-78, test Cab | | |
| Mass | approx. 45 g (three pole) approx. 31 g (double pole) approx. 17 g (single pole) | | |

Approvals

| Authority | Standard | Rated voltage | Current ratings | Approval logos |
|-----------|--------------|--|--|---|
| VDE | IEC/EN 60934 | AC 240 V AC 240 V 3 AC 415 V DC 50 V DC 28 V | 0.1 A...20 A (1-pole) 0.1A...16 A (2-pole) 0.1A...16 A (3-pole) 0.1A...16 A (1-, 2-pole) 0.1 A...20 A (1-pole) |  |
| UL | UL 1077 | AC 250 V AC 250 V DC 50 V | 0.1 A...16 A (1 + 2 pole)* 0.1 A...12 A (3 pole)* 0.1 A...16 A (1 - 3 pole)* |  |
| CSA | C22.2 No 235 | AC 250 V AC 250 V DC 50 V | 0.1 A...16 A (1-, 2- pole)** 0.1 A...12 A (3-pole)* 0.1 A...16 A (1-, 2-, 3-pole)*** |  |
| CQC | GB/T 17701 | AC 240 V AC 240 V 3 AC 415 V DC 50 V | 0.1 A...20 A (1-pole) 0.1A...16 A (2-pole) 0.1A...16 A (3-pole) 0.1A...16 A (1-, 2-pole) |  |

* TC2, OL 1

** TC2, 0,1A-12 A: OL1, >12 A: OL0

*** TC2, OL0

Ordering information - 1-pole

| | |
|--|--|
| Type No. | |
| 3130 | single pole thermal circuit breaker |
| Mounting | |
| F | Snap-in frame |
| Frame | |
| 1 | Standard, panel cut-out 14.6 x 34 mm |
| 3 | Panel cut-out 18.0 x 35-37 mm |
| Number of poles | |
| 1 | single pole, thermally protected |
| Frame mounting | |
| 0 | Snap-in frame, black, panel thickness 1.0-2.5 mm, for frame size 1 |
| 1 | Snap-in frame, black, panel thickness 1.5-3.2 mm, for frame size 3 |
| Terminal design | |
| P7 | blade terminals DIN 46244-C-Ms-S (QC 2x.110) |
| H7 | for terminals 1.1, 2.1 3.1 terminal screws M 3.5 for terminals 1.2, 2.2, 3.2 blade terminals (QC 2x.110) |
| Characteristic curve | |
| T1 | thermal |
| Actuator style | |
| W | rocker switch with marking „I“ and „O“ moulded in |
| Actuator colour | |
| 01 Q | black opaque without illumination |
| 02 Q | white opaque without illumination |
| 04 Q | red opaque without illumination |
| 14 Q R | red translucent with LED-illumination |
| 15 Q Y | orange translucent with LED-illumination |
| 19 Q G | green translucent with LED-illumination (DC only) |
| Illumination voltage range* | |
| 2 | 10 - 14 V DC |
| 3 | 20 - 28 V DC |
| 6 | 90 - 140 V AC |
| 7 | 185 - 275 V AC |
| Current ratings | |
| 0.1...20 A | |
| 3130 - F 1 1 0 - P7 T1 - W 14 Q R 3 - 5 A ordering example | |

Please observe our minimum ordering quantities

* N/A for non-illuminated version

Custom designed versions

Looking for a version you cannot find in our order numbering key? Please get in touch. We will be pleased to find a solution for you.

Ordering information - multipole

| | |
|--|--|
| Type No. | |
| 3130 | multipole thermal circuit breaker |
| Mounting | |
| F | Snap-in frame |
| Frame | |
| 1 | Standard, panel cut-out size depending on no. of poles |
| A | version for X3130 |
| Number of poles | |
| 2 | 2-pole thermally protected |
| 3 | 3-pole thermally protected |
| 5 | 2-pole, 1-pole thermally protected |
| Frame mounting | |
| 0 | Snap-in frame, black, panel thickness 1.0-2.5 mm for frame size 1 |
| A | 2-pole, version for X3130 |
| Terminal design | |
| P7 | blade terminals DIN 46244-C-Ms-S (characteristic curve T1) |
| H7 | for terminals 1.1, 2.1 3.1 terminal screws M 3.5 for terminals 1.2, 2.2, 3.2 blade terminals (QC 2x.110) |
| Characteristic curve | |
| T1 | thermal |
| Actuator style | |
| W | rocker switch with marking „I“ and „O“ moulded in |
| Actuator colour | |
| 01 Q | black opaque without illumination |
| 02 Q | white opaque without illumination |
| 04 Q | red opaque without illumination |
| 14 Q R | red translucent with LED-illumination |
| 15 Q Y | orange translucent with LED-illumination |
| 19 Q G | green translucent with LED-illumination |
| Illumination voltage range* | |
| 2 | 10 - 14 V DC |
| 3 | 20 - 28 V DC |
| 6 | 90 - 140 V AC |
| 7 | 185 - 275 V AC |
| 8 | 320 - 450 V AC |
| Current ratings | |
| 0.1...16 A | |
| 3130 - F 1 3 0 - P7 T1 - W 14 Q R 7 - 5 A ordering example | |

Please observe our minimum ordering quantities


* N/A for non-illuminated version

ETA 3130 Thermal Overcurrent Circuit Breaker


Standard current ratings and typical internal resistance values

| Current rating (A) | Internal resistance per pole (Ω) | Current rating (A) | Internal resistance per pole (Ω) |
|--------------------|---|--------------------|---|
| 0.1 | 94 | 4 | 0.0435 |
| 0.2 | 24 | 5 | 0.0325 |
| 0.3 | 12 | 6 | 0.0215 |
| 0.4 | 5.30 | 7 | 0.0165 |
| 0.5 | 4.20 | 8 | 0.0165 |
| 0.8 | 1.50 | 10 | < 0.02 |
| 1 | 0.9 | 12 | < 0.02 |
| 1.2 | 0.80 | 14 | < 0.02 |
| 1.5 | 0.45 | 15 | < 0.02 |
| 2 | 0.27 | 16 | < 0.02 |
| 2.5 | 0.0785 | 18 | < 0.02 |
| 3 | 0.0595 | 20 | < 0.02 |
| 3.5 | 0.0565 | | |


Dimensions 3130-F110-...

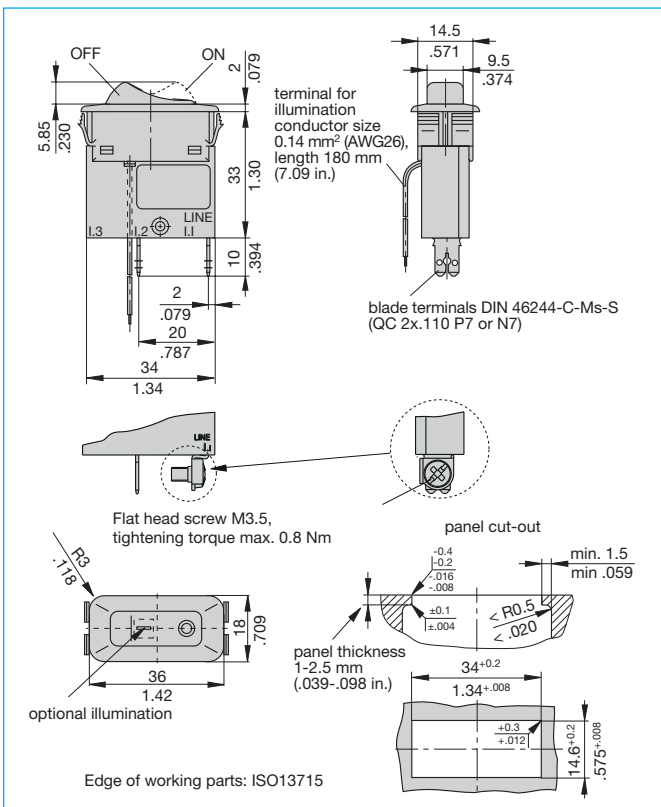


Dimensions 3130-F311-...

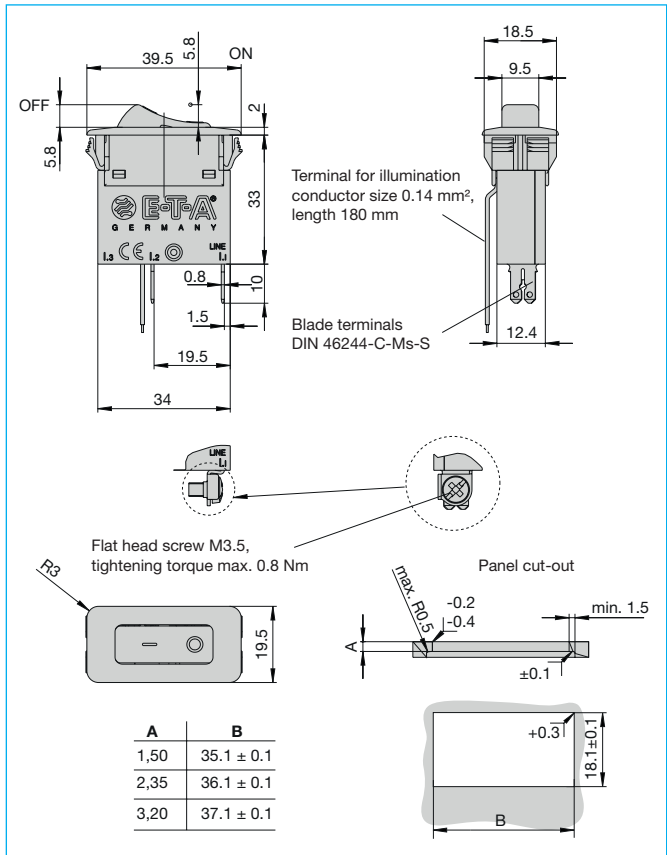


Dimensions 3130-F120-...

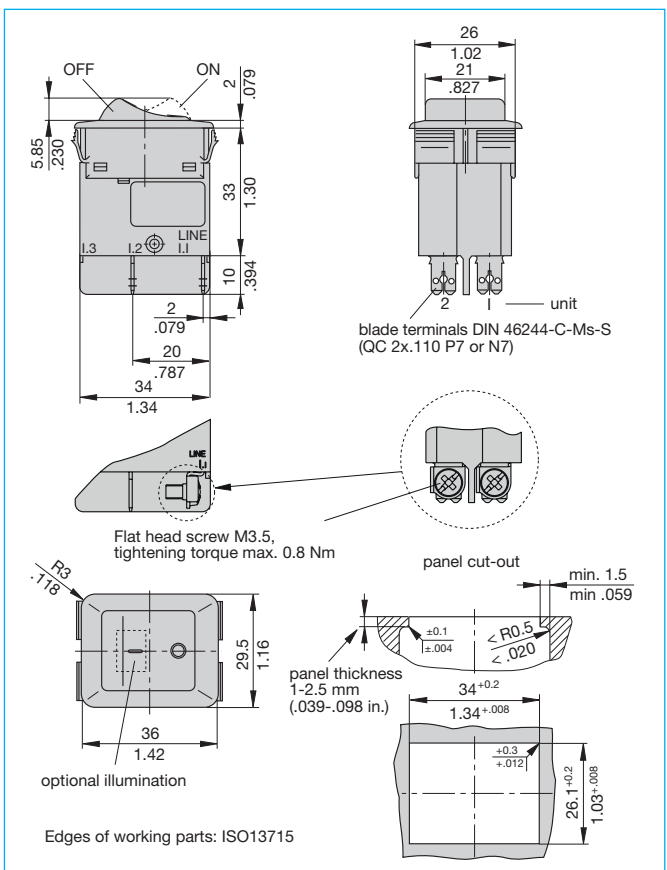


Dimensions 3130-F130-...

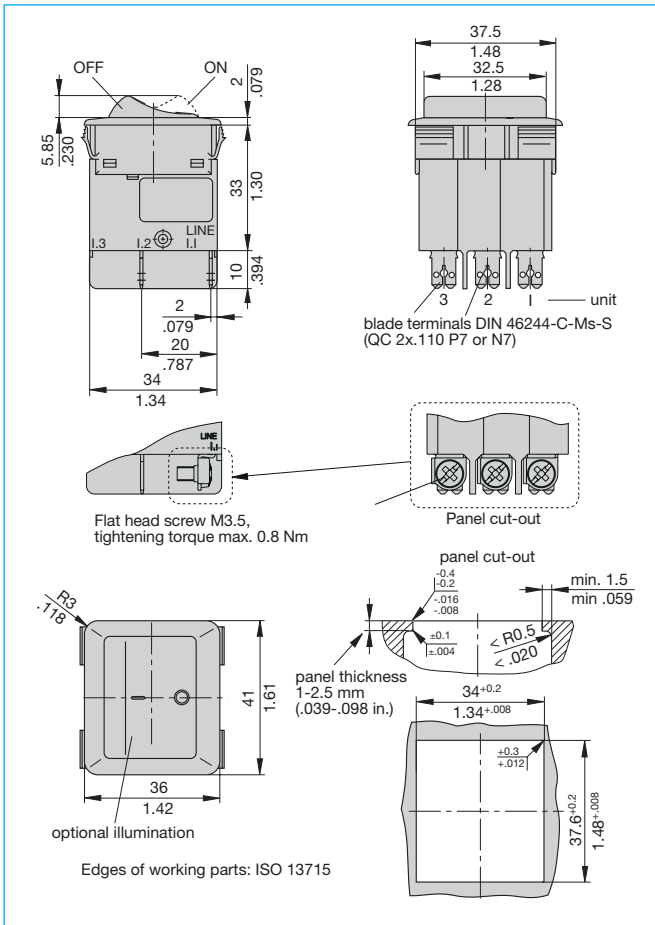

Installation drawing 3130-F1...

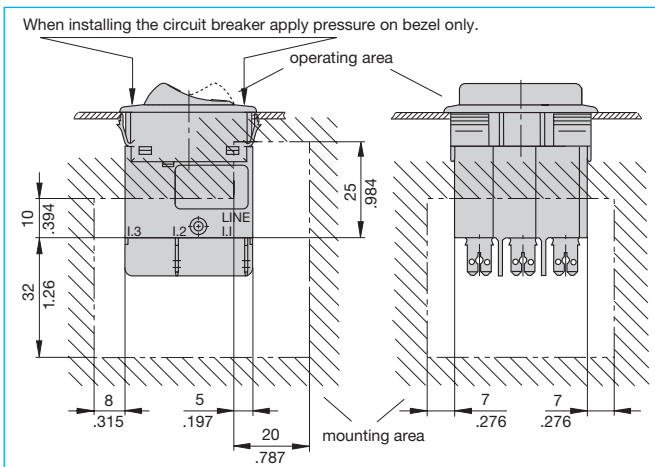


Internal connection diagrams

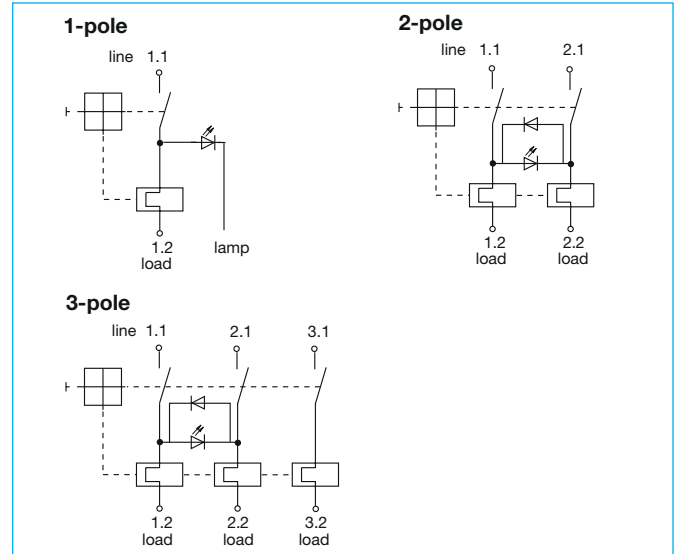

Accessories 3130-F130-...


Splash cover, transparent, for 3-pole version X 221 258 01 (IP54), comprising bezel Y 306 109 01 and transparent cover Y 306 108 01

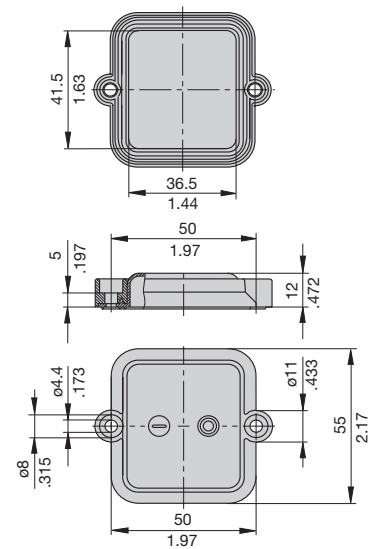


Typical time/current characteristics

Multipole types: all poles symmetrically loaded.
 With single pole overload, thermal tripping will be at approx. $1.54 \times I_N$ with 2-pole devices and at approx. $1.68 \times I_N$ with 3-pole devices.

0.1...2 A

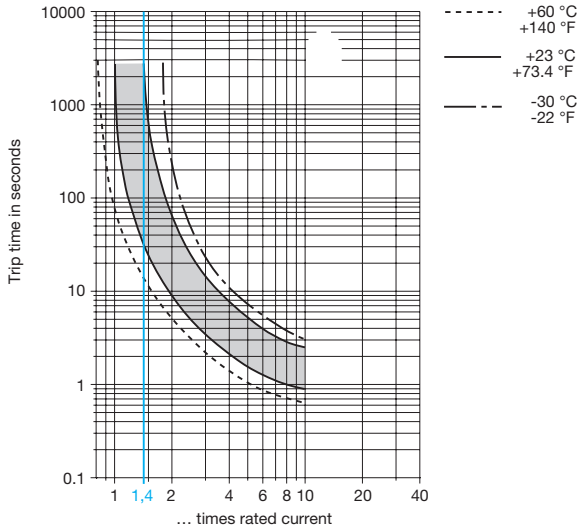

2.5...20 A 1-pole 2.5...16 A 2- and 3-pole

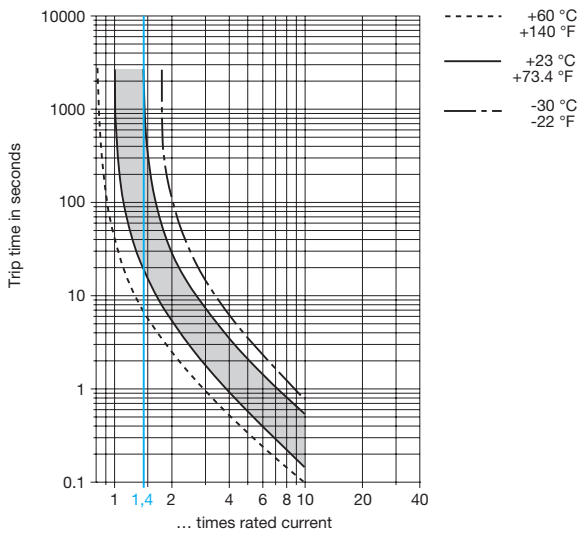

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

| Ambient temperature | °F | -22 | -4 | +14 | +32 | +73.4 | +104 | +122 | +140 |
|---------------------|----|-----|------|------|------|-------|------|------|------|
| °C | | -30 | -20 | -10 | 0 | +23 | +40 | +50 | +60 |
| Derating factor | | 0.8 | 0.84 | 0.88 | 0.92 | 1 | 1.08 | 1.14 | 1.23 |

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.