

Description

Single pole thermal-magnetic circuit breaker with tease-free, trip-free, snap action mechanism and two button operation (M-type TM CBE to EN 60934). Designed for plug-in mounting with E-T-A sockets 17-P10-Si, 23-P10-Si, 63-P10-Si; or panel mounting using E-T-A clips. Featuring an unprotected shunt tap terminal and optional auxiliary contacts. Type 3900 offers lower internal resistance values and is fitted as standard with auxiliary contacts and an intermediate reset position in which all contacts are isolated.

Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Process control systems, instrumentation, communications systems, rail vehicles.

Ordering information

Type No.

3600 standard version with shunt tap terminal -3

3900 low-resistance version

Terminal design

P10 blade terminals 6.3-0.8 (QC .250)

Auxiliary contacts (3900: intermediate position as standard)

Si with blade terminals 6.3-08, one each NO/NC,

Current ratings

0.05...16 A (type 3600)

0.05...10 A (type 3900)

3600 - P10 - Si - 10 A ordering example

The exact part number required can be built up from the table of choices shown above. Ordering references for optional features should be omitted if not required.


Please be informed that we have minimum ordering quantities to be observed.

Preferred types

Preferred types	Standard current ratings (A)						
	0.5	1	2	4	8	10	16
3600-P10-Si-	x	x	x	x	x	x	x
3900-P10-Si-	x	x	x	x			

Standard current ratings and typical internal resistance values

Current ratings (A)	Internal resistance (Ω)		Current ratings (A)	Internal resistance (Ω)	
	3600	3900		3600	3900
0.05	447	211	3	0.19	0.054
0.1	131	48	4	0.090	0.035
0.2	40	12.4	5	0.061	0.025
0.3	19.3	5.4	6	0.041	≤ 0.02
0.4	10.4	3.1	7	0.034	≤ 0.02
0.5	7.1	2.0	8	≤ 0.02	≤ 0.02
0.6	4.3	1.32	10	≤ 0.02	≤ 0.02
0.8	2.5	0.76	12	≤ 0.02	
1	1.67	0.49	14	≤ 0.02	
1.5	0.61	0.21	15	≤ 0.02	
2	0.38	0.101	16	≤ 0.02	
2.5	0.24	0.078			

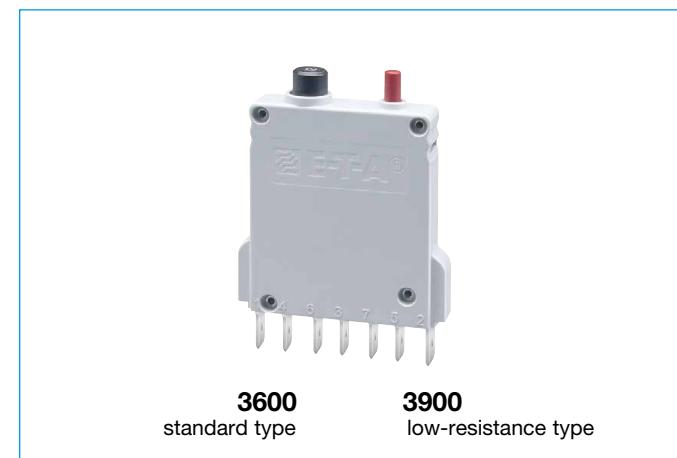

Technical data

For further details please see: http://www.e-t-a.de/ti_e

Voltage rating AC 240 V, 50/60 Hz; DC 65 V
(UL: AC 250 V; DC 65 V)

Current rating range 3600: 0.05...16 A
3900: 0.05...10 A

Auxiliary circuit 1 A, AC 240 V/DC 65 V
min. 10 V/10 mA

Typical life 5,000 operations at $1 \times I_N$, inductive
5,000 operations at $2 \times I_N$, resistive

Ambient temperature -30...+60 °C (-22...+140 °F)

Insulation co-ordination (IEC 60664 and 60664 A) rated impulse withstand voltage 2.5 kV pollution degree 2
reinforced insulation in operating area

Dielectric strength (IEC 60664 and 60664A) test voltage
operating area AC 3,000 V
main/aux. circuit AC 1,500 V
aux. circuit 4-5/6-7 AC 840 V

Insulation resistance >100 MΩ (DC 500 V)

Interrupting capacity I_{cn}	3600	3900
	0.05...0.8 A	0.05...0.2 A
	1...2 A	0.3...2 A
	2.5...16 A	2.5...10 A

self-limiting
200 A
400 A

Interrupting capacity I_N (UL 1077)	I_N	U_N
	0.05...16 A	AC 250 V
type 3600:	0.05...16 A	DC 80 V

1,000 A
1,000 A

Degree of protection (IEC 60529/DIN 40050) operating area IP40
terminal area IP00

Vibration 5 g (57-500 Hz), ± 0.38 mm (10-57 Hz)
to IEC 60068-2-6, test Fc
10 frequency cycles/axis


Shock 25 g (11 ms) to IEC 60068-2-27, test Ea

Corrosion 96 hours at 5 % salt mist
to IEC 60068-2-11, test Ka

Humidity 240 hours at 95 % RH
to IEC 60068-2-78, test Cab


Mass approx. 45 g

Dimensions

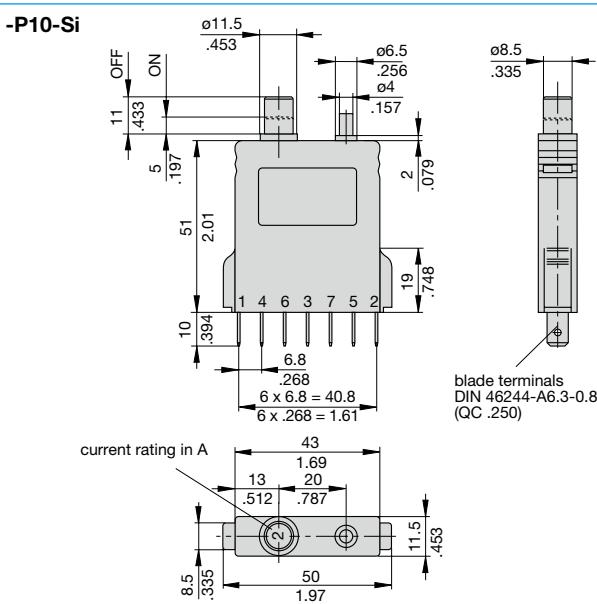


Internal connection diagrams


with shunt terminal (standard)
and auxiliary contacts (-Si) only 3600

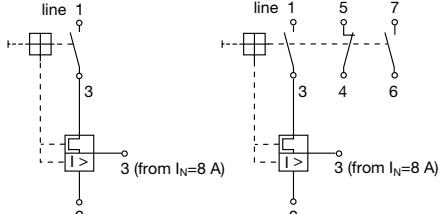




Installation drawing

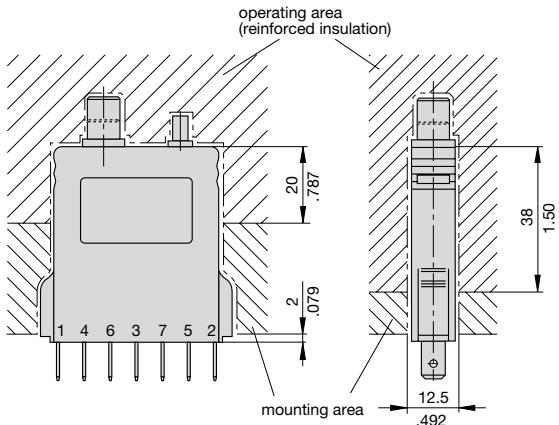

Terminal design -P10

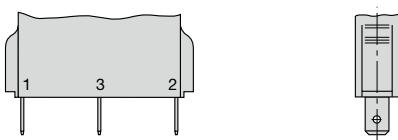

Typical time/current characteristics

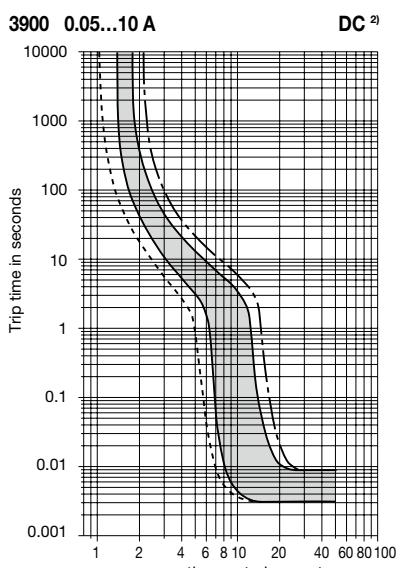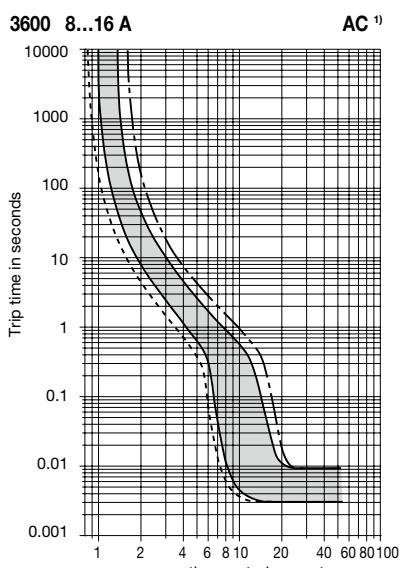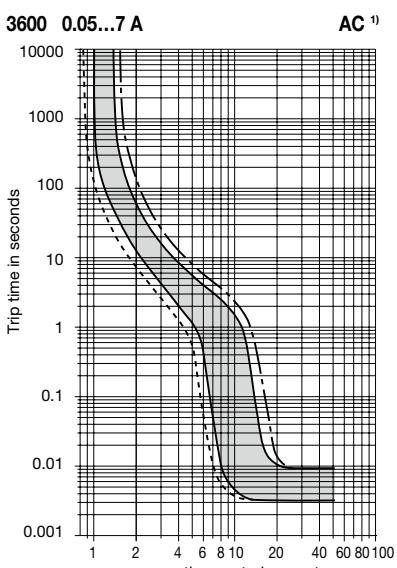

¹⁾ Magnetic tripping currents are increased by 20 % on DC supplies.

²⁾ Magnetic tripping currents are decreased by 20 % on AC supplies.


The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Ambient temp. °F °C	-22 -30	-4 -20	+14 +10	+32 0	+73.4 +23	+104 +40	+122 +50	+140 +60
Derating factor	0.76	0.79	0.83	0.88	1	1.08	1.16	1.24


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Accessories

Power-D-Box with sockets pre-wired 19BGT2 2U
for 18, 24 or 30 circuits.
For technical data see product group Power Distribution Systems.

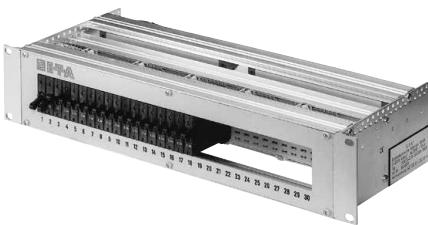

Module 17plus
For technical data see section Power Distribution Systems

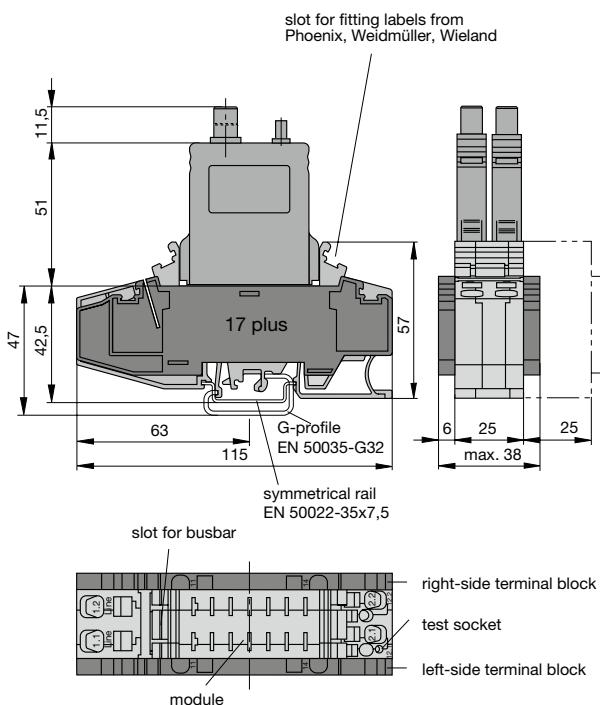


Approvals

Authority	Standard	Voltage ratings	Current ratings
3600:			
VDE	IEC/EN 60934	AC 240 V DC 65 V	0.05...16 A 0.05...16 A
UL	UL 1077	AC 250 V DC 80 V	0.05...16 A 0.05...16 A
CSA	C22.2 No. 235	AC 250 V DC 80 V	0.05...16 A 0.05...16 A
3900:			
VDE	IEC/EN 60934	AC 240 V DC 65 V	0.05...10 A 0.05...10 A

Sockets

17-P10-Si
(up to 16 A max. load)
Retaining clip Y 300 58


17-P10-Si-20025
mounted with adapter
cial order.

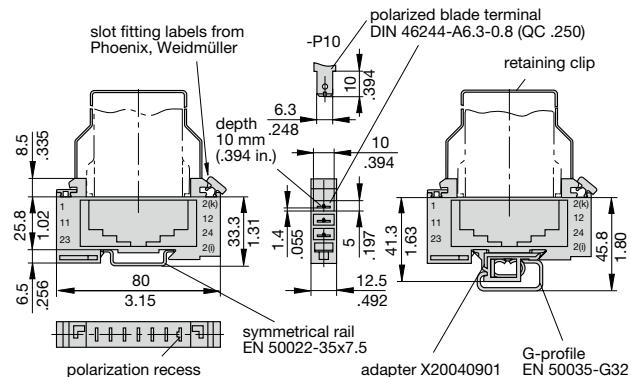

Sockets

SECRET
17-P70-Si

17-P70-Si-20025
mounted with adapter

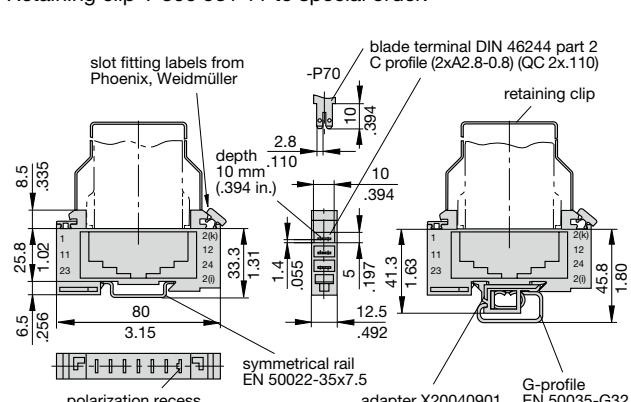

Sockets

SOCKETS
23-P10-Si

63-P10-Si

(up to 16 A max. load)

