



3000 | SERIES

TEMPERATURE SENSOR PROBES

Introduction

Ideal solution for monitoring and regulating temperature in equipment and processes. It offers the choice of thermistor or RTD temperature sensing technology. Since no single technology is optimal for every application, the 3000 series offers several thermal sensing options, each of which offers unique advantages.

The 3000 series offers the advantage of today's best temperature sensing technology in standard, low-cost probe assemblies that ensure the technology performs accurately and reliably in demanding applications. Whether surface, liquid, or ambient air sensing is required, the 3000 series is an optimal probe assembly. Flexible leads suitable for welding or soldering provide reliable connections and greater access to remote locations.



Features


- Stainless steel probe assemblies
- Thermistor, or RTD sensing technologies
- Ideal for immersion, surface and air sensing

Applications

- Surface, liquid, or air temperature sensing
- Control systems

ACCESSORIES AND OPTIONS

Body Style

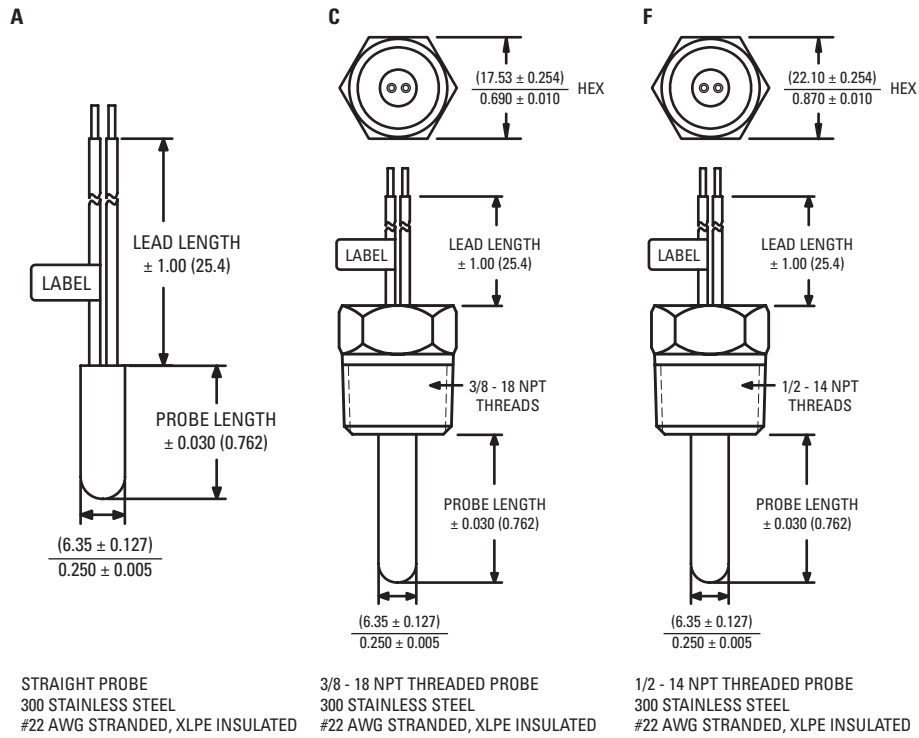

SENSOR SELECTION

Code	Type	Input	Output	Output Change W/ Temperature	Sense Element Tolerance	Temperature Range
10	RTD	1 mA	100Ω at 0°C	0.385Ω per °C	±0.15°C at 0°C	-40°C to 125°C
31	THERMISTOR	0.4 mA	10,000Ω at 25°C	NON-LINEAR (NTC)	±0.6°C at 25°C	-40°C to 125°C

Notes:

- Consult Sensata for other less standard temperature sensing options

NUMBER OF WIRES

CODE	SENSOR WIRING
2	Wires for sensor codes 10, 31
3	Wires for sensor codes 10

WIRE COLOR SCHEMATIC

