


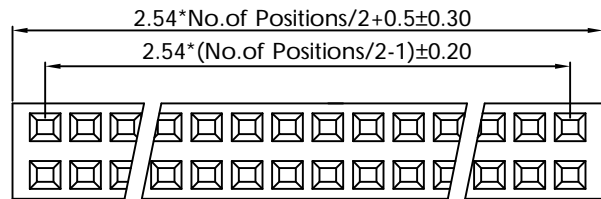


環保物料專用

RoHS compliant

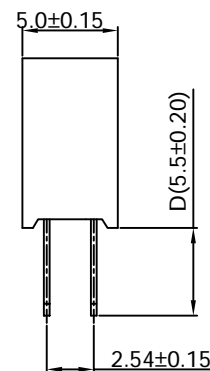

P.C.B. Hole Layout

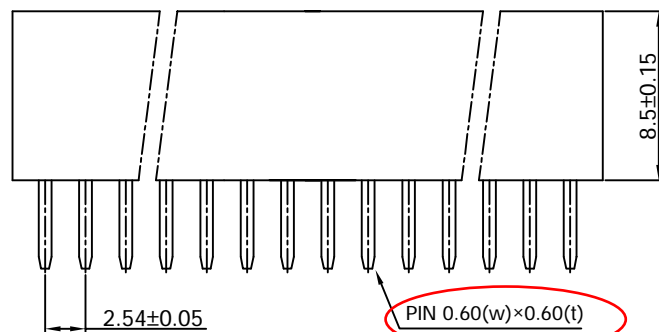

SPECIFICATIONS

- Current Rating :3 Amp
  - Insulator Resistance :5000 Megohms Min.
  - Contact Resistance :20 m ohms max.
  - Dielectric Withstanding :AC 1000 V
  - Operating Temperature :-40°C ~ +105°C
  - Contact Material :Phosphor Bronze
  - Insulator Material :Polyester, UL 94V-0
  - Standard :P.B.T
  - Finish :Tin, Gold or Duplex Plated
  - Standard :Gold Flash all over
- Note:  
Duplex plating: Gold Plated on contact area, Tin on Solder area

Ordering Information

F201-SGP-D055-XX

S: Straight Type	G: Gold Flash D: Gold/Tin Plated T: Tin Plated	(04 TO 80 Contacts)
------------------	--	---------------------



DESCRIPTION(內容):  
2.54mm Female Header 180°

DRAWN(製圖):  
*Tom Liu*  
CHECKED(確認):  
*Jack Wu*


GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE
LINEAR	ANGLES				
X.: ±0.30	X°: ±5.0°	UNIT: mm	1	ORIGINAL	Aug-04-2018
X.X: ±0.20	X.X°: ±3.0°		2	Modify Terminal SPEC	OCT-25-2018
X.XX: ±0.15	X.XX°: ±2.0°	SHEET: 1/1	3		
X.XXX: ±0.10	X.XXX°: ±1.0°		4		

PART NO:  
(料號) F201-SGP-D055-XX  
DWG NO (圖號): KWRD180804-015

APPROVAL(核准):  
*Kane He*

A4

SCALE (比例):  
1:XX



A

B

C

D

E