


TABLE 1		INSERTION LOSS (MAX dB)		VSWR
MODEL NUMBER	LENGTH	20GHz	50GHz	DC ~ 50GHz
415-0536-MM100	100mm +4/-0	-0.6	-1.0	1.3
415-0536-MM200	200mm +5/-0	-1.0	-1.6	1.3
415-0536-MM500	500mm +10/-0	-2.2	-3.1	1.3
415-0536-M1.0	1000mm +15/-0	-3.6	-5.5	1.3

REV	ECO	DATE
1	INITIAL RELEASE	9-23-2021

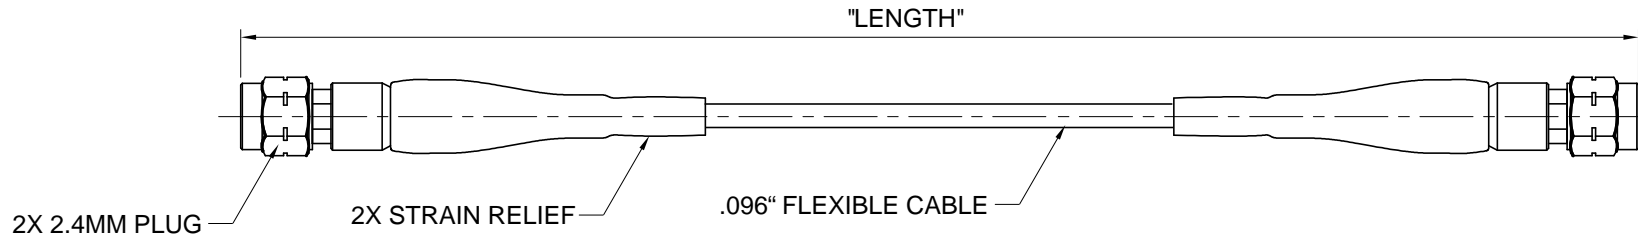

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No: <b>415-0536-MXXXX</b>	<b>JOHNSON</b>		
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code <b>34078</b>	Title: <b>CABLE ASSY, METRIC, STR 2.4MM PLUG TO STR 2.4MM PLUG, .096" FLEXIBLE, LOW LOSS CABLE</b>	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION 	Drawing No. <b>415-0536-MXXXX</b>	REV. <b>1</b>
	Drawn by: <b>TOMMY REN</b>	Date: <b>9-23-2021</b>	Size <b>A</b>	DO NOT SCALE DRAWING Workmanship Std. Sheet NONE 1 OF 1