

SERIES

4212R 4212



Wound Beads


Suppressors

MINIMUM IMPEDANCE

DASH NUMBER* FIGURE TURNS 10 MHz 50 MHz 100 MHz 150 MHz 200 MHz 220 MHz

| SERIES 4212R / 4212 | | | | | | | | |
|---------------------|-----|-------|-----|-----|-----|-----|-----|-----|
| -1 | 1-3 | 2 1/2 | — | — | 750 | 700 | — | 400 |
| -2 | 1-3 | 2 1/2 | 325 | — | 575 | 525 | — | — |
| -3 | 1-1 | 1 1/2 | — | 325 | 425 | — | 400 | — |
| -4 | 1-1 | 1 1/2 | 170 | 320 | 375 | — | — | — |
| -5 | 1-2 | 2 | — | 525 | 600 | — | 600 | — |
| -6 | 1-2 | 2 | 240 | 520 | 480 | — | — | — |
| -7 | 1-4 | 3 | — | 950 | 900 | — | 600 | — |
| -8 | 1-4 | 3 | 400 | 800 | 550 | — | — | — |

*Complete part # must include series # PLUS the dash #

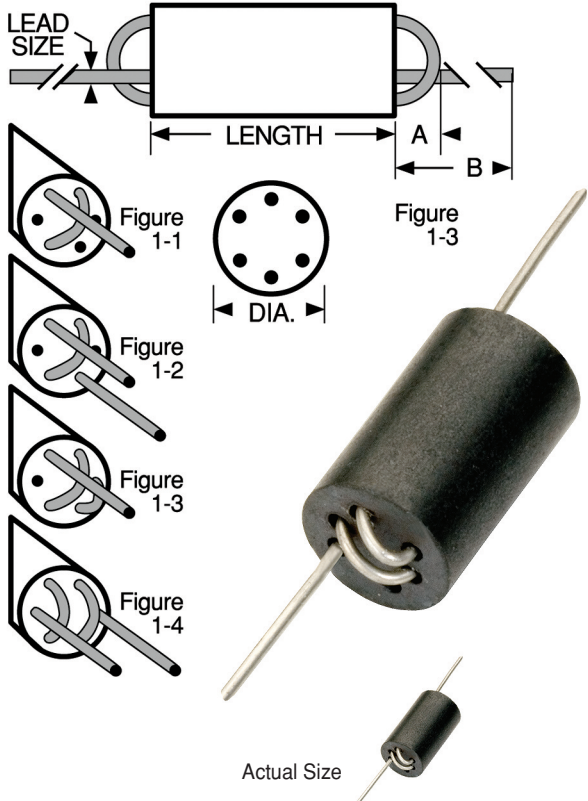

Physical Parameters

| | Inches | Millimeters |
|-------------|------------------|---------------|
| Length | 0.374 to 0.414 | 9.50 to 10.51 |
| Diameter | 0.216 to 0.256 | 5.48 to 6.35 |
| Lead Size | | |
| AWG #24 TCW | 0.0185 to 0.0215 | 0.47 to 0.55 |
| A | 0.12 Max. | 3.05 Max. |
| B | 1.10 Min. | 28.0 Min. |

Impedances measured on HP 4191A Impedance Analyzer.

High resistivity ferrite material eliminates the need to insulate windings.

Lead Wire Plated copper

Packaging Bulk only

For more detailed graphs, contact factory

