BJB///OEM-Line **46.112.1001**

SMD Terminal block



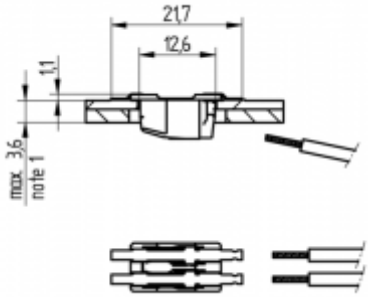





pkg.	wt.	part no.
500	0.5 g	46.112.1001.50

ENEC Rating	9A / 320V
URus Rating:	9A / 300V
cUR Rating:	3A / 300V

SMD Push through terminal block - 2 pole
For wiring below the PCB / metal work
Solder fixing

Housing: PPA
Contacts: Cu alloy

Approval: additional cURus

- No tools required! Wires can be released by twisting and pulling the wire simultaneously.
- Terminal block and ballast on same working level
- Note 1: Maximum thickness of PCB and heatsink should not exceed 3.6 mm
- Note 2: Recommendation for opening in heatsink is shown with minimum diameter. For other shaped pockets in heatsink the minimum creepage and clearance distances and manufacturing tolerances have to be considered.
- Note 3: Recommended dimension for opening in PCB
- Note 4: Recommended dimension for solder mask
- Note 5: For metal core PCBs the minimum creepage distance has to be guaranteed
- Note 6: Recommended pick & place area #1
- Note 7: Recommended pick & place area #2 inside of the connector. Max. diameter of nozzle is 2.5 mm.
- Note 8: Distance from center of mass to pick and place area #1 and #2
- General note: It is recommended to make an electrical connection between both poles of each polarity on the solder mask

LED-LINE	U_{imp} 2,5 kV		0.20-0.75 mm²	0.20-0.75 mm²

Dokument generiert am: 16.05.17 - 04:44 Uhr