

## Description

Single pole, miniaturised, aircraft style thermal circuit breaker with tease-free, trip-free, snap action mechanism and push/pull on/off manual actuation (M-type TO CBE to EN 60934). An indicator band on the push button clearly shows the tripped/off position. Threadneck panel mounted, available in metric and US (MS 3320) configurations. Advanced two-chamber design contributes to fail-safe operation. Temperature compensated from -55° to +125 °C, with optional auxiliary contacts, and fully approved for use on a wide range of aircraft and equipment. Full specification ensures suitability for the most demanding applications. For three pole version see type 583.

## Typical applications

Aircraft systems and equipment (fixed wing and helicopters); other extra low voltage wiring applications; defence equipment; communications systems.

## Standard current ratings and typical volt drop values

| Current rating (A) | Volt drop (mV) | Current rating (A) | Volt drop (mV) |
|--------------------|----------------|--------------------|----------------|
| 1                  | 750            | 10                 | 190            |
| 2                  | 520            | 15                 | 190            |
| 2.5                | 400            | 20                 | 200            |
| 3                  | 360            | 25                 | 170            |
| 4                  | 350            | 30                 | 160            |
| 5                  | 260            | 35                 | 150            |
| 7.5                | 230            |                    |                |

## Approvals

| Authority          | Voltage ratings               | Current ratings      |
|--------------------|-------------------------------|----------------------|
| LN 29886           |                               |                      |
| VG 95345 T06       |                               |                      |
| MS 3320, MS 3320 V |                               |                      |
| QPL                |                               |                      |
| UL                 | AC 250 V, 50/60 Hz<br>DC 75 V | 1...25 A<br>1...35 A |



## Technical data

|   |  |                          |
|---|--|--------------------------|
| Voltage rating  | AC 115 V (400 Hz); DC 28 V<br>(higher voltage ratings upon request)  |                          |
| Current rating range  | 1...35 A   |                          |
| Auxiliary circuit   | 0.5 A, DC 28 V   |                          |
| Typical life  | 20,000 operations mechanical or<br>10,000 operations at $I_N$ ( $\leq 25$ A)<br>5,000 operations at $I_N$ (30 + 35 A)                        |                          |
| Ambient temperature   | -55...+125 °C (-67...+257 °F)  |                          |
| Insulation co-ordination<br>(IEC 60664 and 60664A)                                      | rated impulse<br>withstand voltage<br>1.5 kV   | pollution<br>degree<br>3 |
| Dielectric strength<br>(IEC 60664 and 60664A)<br>operating area<br>main to aux. circuit | test voltage<br>AC 1,500 V<br>AC 1,500 V   |                          |
| Insulation resistance   | > 100 M $\Omega$ (DC 500 V)  |                          |
| Interrupting capacity $I_{cn}$  |  |                          |
| AC 115 V (400 Hz):  | 5 A  | 2,000 A                  |
|   | 7.5...35 A   | 2,500 A                  |
| DC 28 V:  | 1...25 A   | 6,000 A                  |
|   | 30 + 35 A  | 4,000 A                  |
| Degree of protection<br>(IEC 60529/DIN 40050)   | operating area IP40<br>terminal area IP00  |                          |
| Vibration<br>(sinusoidal)   | 15 g (70-2000 Hz), $\pm 0.76$ mm (5-70 Hz)<br>to VG 95210, sheet 19,<br>IEC 60068-2-6, test Fc/ISO 7137                                      |                          |
| Vibration (random)  | 16.4 g rms, 0.2 g <sup>2</sup> /Hz $\pm 1.5$ dB<br>to VG 95210, sheet 29, ISO 7137   |                          |
| Acceleration  | 17 g, to ISO 2669  |                          |
| Shock   | 75 g (11 ms) to VG 95210, sheet 28,<br>IEC 60068-2-27, test Ea/ISO 7137  |                          |
| Corrosion   | 96 hours at 5 % salt mist, severity A<br>48 hours at 20 % salt mist, severity B<br>to VG 95210, sheet 2,<br>IEC 60068-2-11, test Ka/ISO 7137 |                          |
| Humidity  | 240 hours at 95 % RH,<br>to VG 95210, sheet 7,<br>IEC 60068-2-3, test C/ISO 7137   |                          |
| Explosion   | to VG 95210, sheet 10,<br>MIL-STD-202, meth. 109   |                          |
| Altitude  | $\leq 25,000$ m above sea level  |                          |
| Mass  | max. 29 g with auxiliary contact<br>max. 25 g without auxiliary contact  |                          |
| <b>Weight reduction through aluminium threadneck: approx. 3 g</b>                       |  |                          |

## Ordering information

|  |     |   |
|--|-----|---|
| <b>Type No.</b>                                  | 483 | single pole, with temperature compensation  |
| <b>Mounting</b>                                  |     |   |
| <b>G</b>   |     | threadneck panel mounting, standard   |
| <b>V</b>   |     | threadneck panel mounting, high vibration performance   |
| <b>Threadneck design</b>                         |     |   |
| <b>1</b>   |     | M12x1x6.4x8.8 dia. with mounting plate (aux. contact version)                                 |
| <b>2</b>   |     | 15/32-32UNx6.4x7.8 dia. (without aux. contact)  |
| <b>3</b>   |     | MJ12x6.4x8.8 dia. (without aux. contact)  |
| <b>4</b>   |     | M12x1x6.4x8.8 dia. (without aux. contact)   |
| <b>5</b>   |     | 7/16-32UNx6.4x7.8 dia. (without aux. contact)   |
| <b>6</b>   |     | M12x1x9.4x8.8 dia. (without aux. contact)   |
| <b>7</b>   |     | 7/16-32 UNx6.4x7.8 dia. with mounting plate (aux. contact version)                            |
| <b>8</b>   |     | as 483-G1...but with aluminium threadneck (only mounting -G and aux. contact versions S1, S5) |
| <b>Hardware for threadneck (washers)</b>         |     |   |
| <b>0</b>   |     | without hardware  |
| <b>1</b>   |     | wave washer 12/15 - mounted   |
| <b>2</b>   |     | mounted washer 12.1/17.2 - mounted  |
| <b>3</b>   |     | mounted washer 11.3/14.9 - mounted (threadneck design 5, 7 only)                              |
| <b>4</b>   |     | mounted washer 12/15 - mounted  |
| <b>5</b>   |     | tooth washer 12.1/17.2, bulk shipped  |
| <b>Hardware for threadneck (nuts)</b>            |     |   |
| <b>0</b>   |     | without hardware  |
| <b>1</b>   |     | hex nut M12x1 (threadneck design 1, 4, 6 only)  |
| <b>2</b>   |     | hex nut 15/32-32UN (threadneck design 2 only)   |
| <b>3</b>   |     | hex nut 7/16-32UN (threadneck design 5, 7 only)   |
| <b>4</b>   |     | hex nut M12x1, aluminium, fitted (threadneck design 8 only)                                   |
| <b>5</b>   |     | hex nut MJ12x1 (only with threadneck design 3)  |
| <b>6</b>   |     | hex nut M12x1, bulk shipped (threadneck design 1,4,6)   |
| <b>Terminal design (main terminals)</b>          |     |   |
| <b>K</b>   |     | screws terminals with metric thread   |
| <b>1</b>   |     | K14 (M4, MJ4)   |
| <b>J</b>   |     | screw terminals with inch thread  |
| <b>1</b>   |     | J14 (8-32UNC-2B)  |
| <b>2</b>   |     | J17 (8-32UNC-2B)  |
| <b>3</b>   |     | J25 (6-32UNC-2B)  |
| <b>Characteristic curve</b>                      |     |   |
| <b>M1</b>  |     | thermal, 1.15-1.38 I <sub>N</sub>   |
| <b>Terminal screws</b>                           |     |   |
| <b>A</b>   |     | Phillips screw M4x6   |
| <b>B</b>   |     | Phillips screw 8-32UNC-2Ax6 (MS 51957-41)   |
| <b>C</b>   |     | Phillips screw 6-32UNC-2Ax6 (MS 51957-26)   |
| <b>D</b>   |     | slotted flat head screw M4x6  |
| <b>E</b>   |     | hex screw with Phillips head 8-32UNC-3A-9.5   |
| <b>K</b>   |     | hex screw with Phillips head 8-32UNC-3Ax7.6   |
| <b>L</b>   |     | Phillips screw MJ4x6  |
| <b>M</b>   |     | as "K" but bulk shipped   |
| <b>Z</b>   |     | without accessories   |
| <b>Terminal washers</b>                          |     |   |
| <b>0</b>   |     | without lock washer   |
| <b>1</b>   |     | lock washer B4  |
| <b>2</b>   |     | lock washer 4.3 (MS 35338-137)  |
| <b>3</b>   |     | lock washer B4 and washer 4.4/9.5   |
| <b>4</b>   |     | lock washer 3.7 (MS 35338-136)  |
| <b>5</b>   |     | lock washer 4.3/9   |
| <b>Auxiliary contact</b>                         |     |   |
| <b>S0</b>  |     | without auxiliary contact   |
| <b>S1</b>  |     | with auxiliary contact (N/C) connector to EN3155-016M2018, size 20                            |
| <b>S5</b>  |     | with polarized auxiliary contact (N/C)  |
| <b>Barrier</b>                                   |     |   |
| <b>Z</b>   |     | without barrier (standard)  |
| <b>Colour of the push button</b>                 |     |   |
|  |     | blank: black (standard) (e. g. 7.5)   |
| <b>A</b>   |     | green (e. g. 7.5)   |
| <b>G</b>   |     | green, marking to EN (e. g. 7 1/2)  |
| <b>N</b>   |     | black, marking to EN (e. g. 7 1/2)  |
| <b>Current ratings</b>                           |     |   |
|  |     | 1...35 A  |
| <b>483 - G 4 1 1 - K 1 M1 - A 1 S0 Z . - 5 A</b> |     | ordering example  |

## Ordering information for approved devices

### 483-G411-K1M1-A1S0ZN

Metric threadneck M12x1 and terminal design -K14 (M4x6), listed by the German Materialamt der Bundeswehr to VG 95345 T06.

### 483-G111-K1M1-A1S1ZN

Metric threadneck M12x1 and terminal design -K14 (M4x6) and auxiliary contact -Si, listed by the German Materialamt der Bundeswehr to VG 95345 T06.

### 483-G533-J1M1-B2S0ZN (MS 3320)

Threadneck size 7/16-32UNSx6.4 and terminal design -J14 (inch thread 8-32), approved to MS 3320.

### 483-V533-J1M1-B2S0ZN (MS 3320-V)

Threadneck size 7/16-32UNSx6.4 and terminal design -J14 (inch thread 8-32), approved to MS 3320-V.

### 483-G533-J3M1-C4S0Z (483-TC-G11-J25)

Threadneck size 7/16-32UNSx6.4 and terminal design -J25 (inch thread 6-32), listed by the German Materialamt der Bundeswehr to VG 95345, part 6.

### 483-G814-K1M1-A1S1ZN

Aluminium threadneck M12x1x6.4x8.8 dia.

## Internal connection diagrams



with auxiliary contact

with polarized auxiliary contact

## Dimensions 483-G411-K1M1-A1S0ZN (VG 95345 T06)




## Dimensions 483-G111-K1M1-A1S1ZN (VG 95345 T06)



## Dimensions 483-G533-J1M1-B2S0ZN (MS 3320)



## Mounting

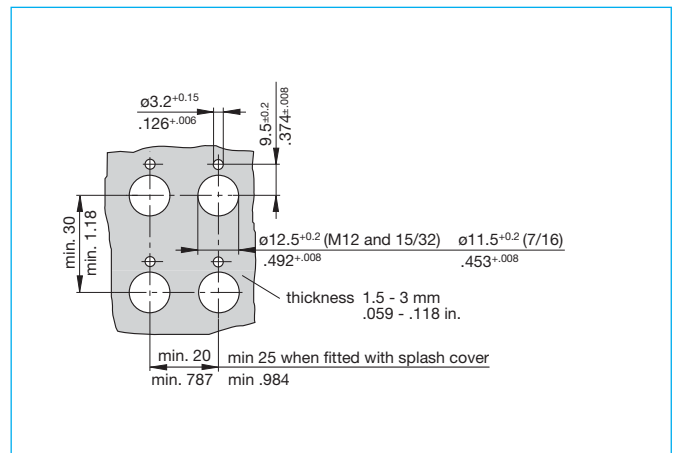

This is a metric design and millimeter dimensions take precedence ( $\frac{mm}{inch}$ )