


SMARC-sAL28



SMARC Module with NXP LS1028 Layerscape Processor

- ▶ Dual-Core Cortex A-72 on a SMARC short size form factor
- ▶ Up to 4 GByte DDR3L non-ECC and ECC memory down. ECC as default.
- ▶ One PCIe line can be used as QSGMII port to drive 4 1 GByte TSN capable Ethernet ports
- ▶ 3D GPU
- ▶ 2x Gigabit Ethernet, TSN capable

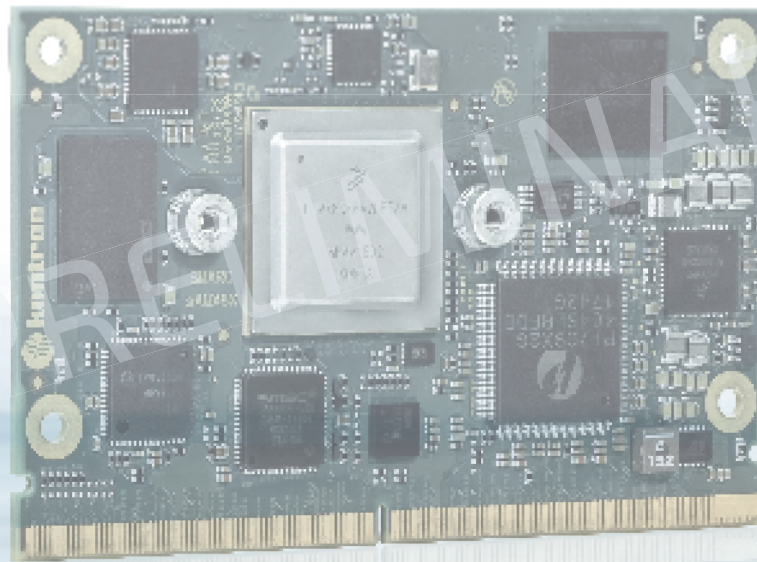