

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APRD
A	UPDATE CORRECT MATERIAL ER076128	1/25/2019	ASNZ
B	CORRECT TITLE PER ER076778	3/5/2019	ASNZ

NOTES:

MATERIALS:

STAINLESS STEEL 303 PER ASTM A484 AND A582.
 BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530
 PTFE

FINISH:

CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.
 BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER ASTM A380.

FREQUENCY:

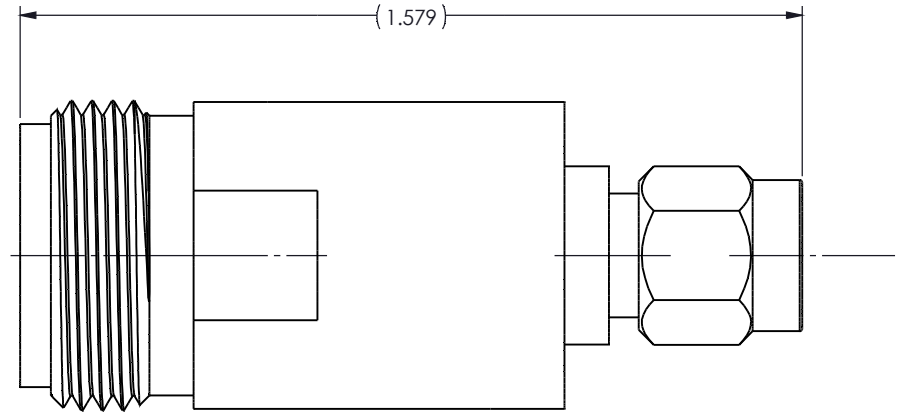
DC-18 GHz

VSWR:



1.15 TO 18 GHz.

INSERTION LOSS:

$.05\sqrt{f(\text{GHz})}$



UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONS: ±1/64
 .X : ±.030
 .XX : ±.010
 .XXX : ±.005
 ANGLES: X° ±1°
 X** : ±15°
 MACHINED SURFACES:
 32/

DRAWN LRH	DATE 02/01	 Winchester Interconnect. 245 Lynnfield St. Peabody, MA 01960	TITLE: N JACK TO 3.5 mm PLUG
APPR.	DATE		
APPR.	DATE	DCAMELIO	DWG. NO. 53-922-0000-71
OTHER APPR.	DATE		
THIRD ANGLE PROJECTION 		SIZE B	REV B
SH 1 OF 1		SCALE: 4:1	