

max. 670 m<sup>3</sup>/h**S-Force**

# DC axial fans

□ 140 x 51 mm

- **Material:** Housing: Die-cast aluminium  
Impeller: GRP<sup>1)</sup> (PA)
- **Direction of air flow:** Intake over struts
- **Direction of rotation:** Counter-clockwise, seen on rotor
- **Connection:** Via single wires AWG 20 and AWG 22, TR 64
- **Highlights:** Highly efficient and smoothly running 3-phase fan drive
- **Mass:** 900 g

## Possible special versions:

- (See chapter DC fans - specials)
- Speed signal
  - Go- / NoGo-alarm
  - Alarm with limit speed
  - External temperature sensor
  - Internal temperature sensor
  - PWM control input
  - Analog control input
  - Multi-option control input
  - Humidity protection
  - Salt fog protection
  - Degree of protection: IP 54 / IP 68

1) Fibreglass-reinforced plastic

### Series 5300 TD


#### Nominal data

Type	m <sup>3</sup> /h	cfm	Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sinter sleeve bearings	Ball bearings	Input power*	Nominal speed	Temperature range	Service life L <sub>10</sub> (40 °C) ebm-papst Standard	Service life L <sub>10</sub> (T <sub>max</sub> ) ebm-papst Standard	Life expectancy L <sub>10</sub> IPC (40 °C) see page 17	Curve
5312/2 TDHP	410	241	<b>12</b>	8...16	70	7,7	■	■	43	6 000	-20...+70	70 000 / 35 000	117 500	①			
5314/2 TDHP	410	241	<b>24</b>	16...36	70	7,7	■	■	42	6 000	-20...+70	70 000 / 35 000	117 500	①			
5314/2 TDHHP	490	288	<b>24</b>	16...36	75	8,1	■	■	67	7 000	-20...+70	62 500 / 30 000	105 000	②			
5318/2 TDHP	410	241	<b>48</b>	36...72	70	7,7	■	■	42	6 000	-20...+70	70 000 / 35 000	117 500	①			
5318/2 TDHHP	490	288	<b>48</b>	36...72	75	8,1	■	■	66	7 000	-20...+70	62 500 / 30 000	105 000	②			
5318/2 TDH4P	670	394	<b>48</b>	36...72	79	8,8	■	■	149	9 200	-20...+65	57 500 / 32 500	97 500	③			

Subject to alterations

Speed control range from 1000 rpm up to maximum speed. Standstill at 0 % PWM,  
maximum speed if control wire is interrupted.

\* Input power at free air flow, these values can be significantly higher in the operating point.

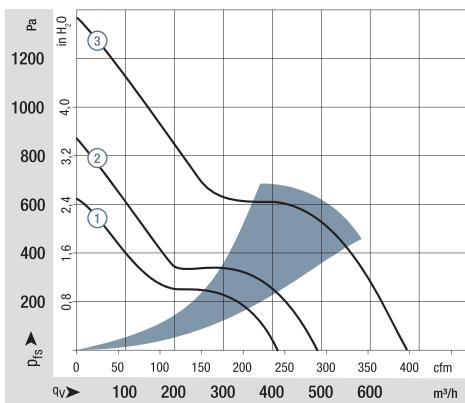

Air performance measured as per: ISO 5801,  
Installation category A, without accidental contact.  
Noise: Total sound power level L<sub>WA</sub> ISO 103002  
measured on half-sphere of 2 m;  
Sound pressure level L<sub>pA</sub> measured at 1 m distance to fan axis.  
The acoustic values are only valid for the described measurement  
set-up and may vary depending on the installation situation.  
In case of any deviation to the standard setup, the values have  
to be checked and reviewed once installed or fitted.  
For detailed information see:  
<http://www.ebmpapst.com/general conditions>

