


FEATURES:

Kit allows users to make their own adapters combinations, such as SMA to BNC or BNC to double banana plugs. Adapter's ends are joined with coupling nuts. Simply choose your combination. All connectors feature gold plated center contacts and silver plated bodies.

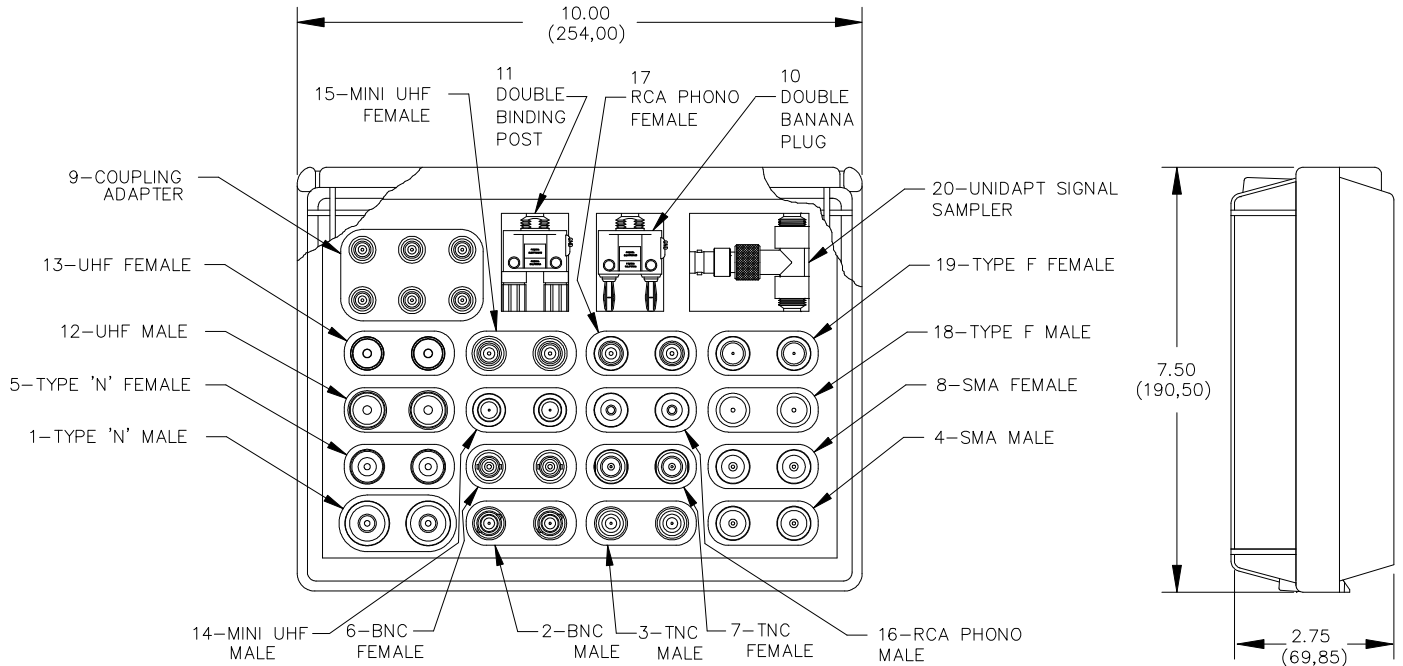

RATINGS:

Operating Temperature:

Items 1 through 9, and 12 through 20:
 -67°F to +302°F (-55°C to +150°C)

Items 10 and 11:
 +122°F (+50°C)

Nominal Impedance:

Items 1 through 9, and 12 through 20: 50 Ohms

Items 18 and 19: 75 Ohms

VSWR:

Items 1 through 9: 1.2:1 (DC-1GHz)

Items 12 through 15: 1.2:1 (DC-300 MHz)

Frequency Range:

Items 1 through 9: DC-1GHz

Items 12 through 15: DC-500 MHz

Items 16 through 19: DC-300 MHz

Item 20: 50MHz -3GHz



Order Example: 5748
(Maxi Universal Adapter Kit)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com
 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Item	Description	Model	Material
1	"N" male	5734	Center Contact: Gold Plated Brass, Dielectric: Teflon, Shell: Silver Plated Brass
2	BNC male	5735	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
3	TNC male	5736	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
4	SMA male	5737	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
5	"N" female	5738	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
6	BNC female	5739	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
7	TNC female	5740	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
8	SMA female	5741	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
9	Coupler	5742	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
10	Double Banana Plug	5743	Spring: Beryllium copper ASTM B194, alloy 172 cond. Ht. Plug Body: Brass per QQ-B-626, alloy 360, ½ hard. Finish: Nickel plated per QQ-N-290, class2, 200/300 microinches Insulation: ABS. Color: Black Center Contact: Gold plated brass Dielectric: Teflon Shell: Silver plated brass
11	Double Binding Post	5744	Body: Brass per QQ-B-626, alloy 360, ½ hard Finish: Nickel plated per QQ-N-290, class 2, 200/300 microinches Insulation: Polycarbonate. Color: one black, one red Insulation, Body: ABS. Color: Black Center Contact: Gold plated phosphor bronz Dielectric: Teflon Shell: Silver plated brass
12	UHF male	5752	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
13	UHF female	5756	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
14	Mini UHF male	5753	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
15	Mini UHF female	5757	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
16	RCA male	5754	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
17	RCA female	5758	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
18	"F" male	5759	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
19	"F" female	5755	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass
20	Signal Sampler	5760	Center Contact: Gold Plated Phosphor Bronze, Dielectric: Teflon, Shell: Silver Plated Brass

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com
 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com