

## Xelity 8TX Unmanaged Switch 8 Port 100Mbit

8 port unmanaged switch


Connection cables are in the online shop under "Connection Technology".

### [Link to Product](#)

#### Illustration



Product may differ from Image

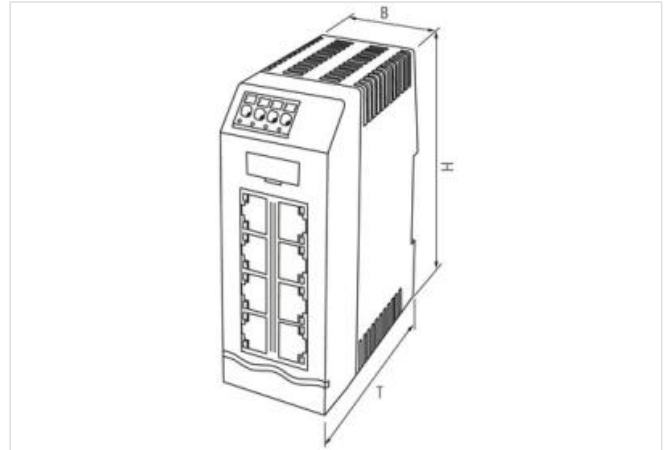

#### classifications

ECLASS-6.0	19170106
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-8.0	19170106
ECLASS-9.0	19170106
ECLASS-10.1	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ETIM-5.0	EC000734

#### Connections

Fieldbus	8× RJ45
Supply	Push-In spring clamp terminals, 0.2...2.5 mm <sup>2</sup> (0.25...1.5 mm <sup>2</sup> )

#### Technical Data

Operating voltage	9.5...31.5 V
Transfer rate	10/100 Mbit/s full duplex
Over voltage protection	yes
Current consumption	max. 50 mA
Operating modes	Autocrossing Autonegotiation
Invers-polarity protection	yes
Input current	max. 1.2 W

#### Switch Management

Protocols	no
Port Mirroring	no

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-09-14

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	no
Websserver	no
Switch Form	Unmanaged Switch

**General data**

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+60 °C (storage temperature -40...+85 °C)
Housing	Black plastic
Protection	IP20
Dimensions HxWxD	105x41.6x85.1 mm

**Diagnostic**

Communication status	via LED
Monitoring - no voltage	yes

**Commercial data**

customs tariff number	85176200
GTIN	4048879798808
Packaging unit	1