

## Description

The 5PB11xx is a high-performance LVCMOS clock buffer family of devices. It has an additive phase jitter of 50fs RMS.

There are five different fan-out variations available: 1:2 to 1:10.

The 5PB11xx supports a synchronous glitch-free output enable (OE) function to eliminate any potential intermediate incorrect output clock cycles when enabling or disabling outputs. It can operate from a 1.8V to 3.3V supply.


## Typical Applications

- Industrial applications
- Automotive:
  - Radar, Lidar, and other applications

## Features

- High-performance 1:2, 1:4, 1:6, 1:8, 1:10 LVCMOS clock buffer
- Very low pin-to-pin skew: < 50ps
- Very low additive jitter: < 50fs
- Supply voltage: 1.8V to 3.3V
- 3.3V tolerant input clock
- $f_{MAX} = 200\text{MHz}$
- Integrated serial termination for 50Ω channel
- Packaged in 8-, 14-, 16-, 20-pin TSSOP and as small as 2 × 2 mm DFN and 3 × 3 mm VFQFPN packages
- Industrial (-40°C to +85°C) and extended (-40°C to +105°C) temperature ranges
- 5PB1104 available in AEC-Q100 qualified, Automotive Grade 1 (-40°C to +125°C)
- 5PB1110 available in AEC-Q100 qualified, Automotive Grade 2 (-40°C to +105°C)

## Block Diagram

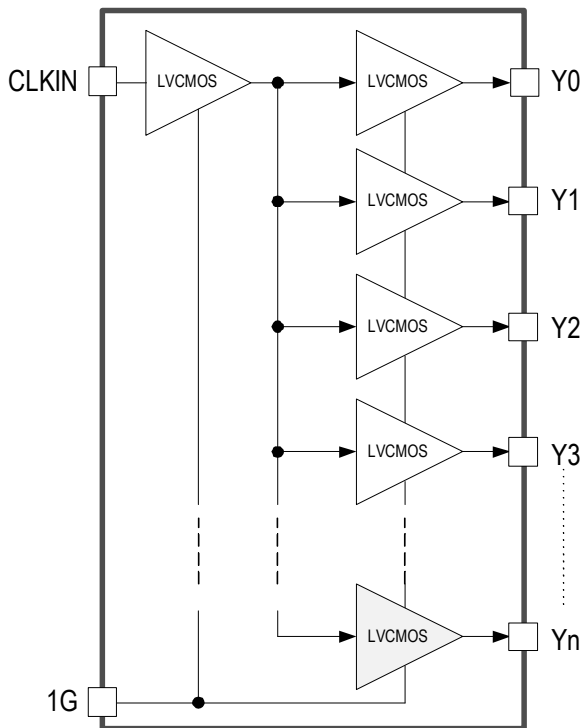

## Contents

|   |    |
|---|----|
| Description                                     | 1  |
| Typical Applications                            | 1  |
| Features  | 1  |
| Block Diagram                                   | 1  |
| Pin Assignments – TSSOP Packages                | 3  |
| Pin Descriptions – TSSOP Packages               | 3  |
| Pin Assignments – DFN/VFQFPN Packages           | 4  |
| Pin Descriptions – DFN/VFQFPN Packages          | 4  |
| Output Logic Table                              | 5  |
| Absolute Maximum Ratings                        | 5  |
| Recommended Operating Conditions                | 5  |
| Thermal Characteristics                         | 6  |
| DC Electrical Characteristics                   | 7  |
| AC Electrical Characteristics                   | 13 |
| Phase Noise Plots                               | 19 |
| Test Load and Circuit                           | 20 |
| Package Outline Drawings                        | 20 |
| Marking Diagrams (Industrial)                   | 20 |
| Marking Diagrams (Extended)                     | 21 |
| Marking Diagrams (Automotive)                   | 21 |
| Ordering Information (Industrial)               | 22 |
| Ordering Information (Extended)                 | 23 |
| Ordering Information (Automotive)               | 23 |
| Ordering Information (Special Material Request) | 24 |
| Revision History                                | 24 |

## Pin Assignments – TSSOP Packages

**Figure 1. Pin Assignments for TSSOP Packages**

|       |   |   |     |       |   |    |     |       |    |    |     |
|-------|---|---|-----|-------|---|----|-----|-------|----|----|-----|
| CLKIN | 1 | 8 | Y1  | CLKIN | 1 | 14 | Y1  | CLKIN | 1  | 20 | Y1  |
| 1G    | 2 | 7 | NC  | 1G    | 2 | 13 | Y3  | 1G    | 2  | 19 | Y3  |
| Y0    | 3 | 6 | VDD | Y0    | 3 | 12 | VDD | Y0    | 3  | 18 | VDD |
| GND   | 4 | 5 | NC  | GND   | 4 | 11 | Y2  | GND   | 4  | 17 | Y2  |
|       |   |   |     | VDD   | 5 | 10 | GND | VDD   | 5  | 16 | GND |
|       |   |   |     | Y4    | 6 | 9  | Y5  | Y4    | 6  | 15 | Y5  |
|       |   |   |     | GND   | 7 | 8  | VDD | GND   | 7  | 14 | VDD |
|       |   |   |     |       |   |    |     | Y6    | 8  | 13 | Y7  |
|       |   |   |     |       |   |    |     | VDD   | 9  | 12 | Y8  |
|       |   |   |     |       |   |    |     | Y9    | 10 | 11 | GND |
|       |   |   |     |       |   |    |     |       |    |    |     |
| CLKIN | 1 | 8 | Y1  | CLKIN | 1 | 16 | Y1  |       |    |    |     |
| 1G    | 2 | 7 | Y3  | 1G    | 2 | 15 | Y3  |       |    |    |     |
| Y0    | 3 | 6 | VDD | Y0    | 3 | 14 | VDD |       |    |    |     |
| GND   | 4 | 5 | Y2  | GND   | 4 | 13 | Y2  |       |    |    |     |
|       |   |   |     | VDD   | 5 | 12 | GND |       |    |    |     |
|       |   |   |     | Y4    | 6 | 11 | Y5  |       |    |    |     |
|       |   |   |     | GND   | 7 | 10 | VDD |       |    |    |     |
|       |   |   |     | Y6    | 8 | 9  | Y7  |       |    |    |     |


## Pin Descriptions – TSSOP Packages

**Table 1. Pin Descriptions for TSSOP Packages**

| Device Number | LVC MOS Clock Input | Clock Output Enable | LVC MOS Clock Output                | Supply Voltage  | Ground       |
|---------------|---------------------|---------------------|-------------------------------------|-----------------|--------------|
|               | CLKIN               | 1G                  | Y0, Y1, ... Y9                      | V <sub>DD</sub> | GND          |
| 5PB1102PGG    | 1                   | 2                   | 3, 8                                | 6               | 4            |
| 5PB1104PGG    | 1                   | 2                   | 3, 8, 5, 7                          | 6               | 4            |
| 5PB1106PGG    | 1                   | 2                   | 3, 14, 11, 13, 6, 9                 | 5, 8, 12        | 4, 7, 10     |
| 5PB1108PGG    | 1                   | 2                   | 3, 16, 13, 15, 6, 11, 8, 9          | 5, 10, 14       | 4, 7, 12     |
| 5PB1110PGG    | 1                   | 2                   | 3, 20, 17, 19, 6, 15, 8, 13, 12, 10 | 5, 9, 14, 18    | 4, 7, 11, 16 |

## Pin Assignments – DFN/VFQFPN Packages

Figure 2. Pin Assignments for DFN/QFN Packages

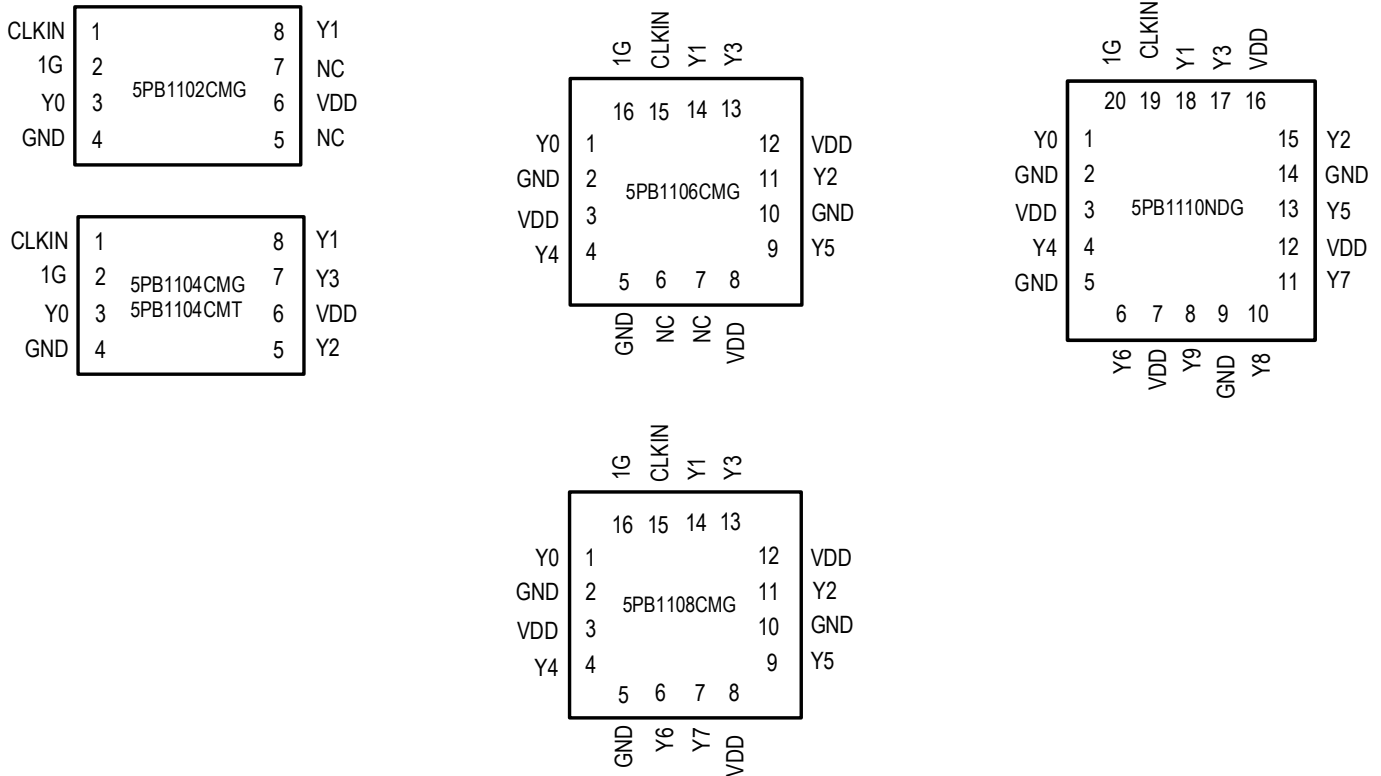

## Pin Descriptions – DFN/VFQFPN Packages

Table 2. Pin Descriptions for DFN/VFQFPN Packages

| Device Number            | LVC MOS Clock Input | Clock Output Enable | LVC MOS Clock Output               | Supply Voltage  | Ground      |
|--------------------------|---------------------|---------------------|------------------------------------|-----------------|-------------|
|                          | CLKIN               | 1G                  | Y0, Y1, ... Y9                     | V <sub>DD</sub> | GND         |
| 5PB1102CMG               | 1                   | 2                   | 3, 8                               | 6               | 4           |
| 5PB1104CMG<br>5PB1104CMT | 1                   | 2                   | 3, 5, 7, 8                         | 6               | 4           |
| 5PB1106CMG               | 15                  | 16                  | 1, 4, 9, 11, 13, 14                | 3, 8, 12        | 2, 5, 10    |
| 5PB1108CMG               | 15                  | 16                  | 1, 4, 6, 7, 9, 11, 13, 14          | 3, 8, 12        | 2, 5, 10    |
| 5PB1110NDG               | 19                  | 20                  | 1, 4, 6, 8, 10, 11, 13, 15, 17, 18 | 3, 7, 12, 16    | 2, 5, 9, 14 |

## Output Logic Table

| Inputs |    | Output |
|--------|----|--------|
| CLKIN  | 1G | Yn     |
| X      | L  | L      |
| L      | H  | L      |
| H      | H  | H      |

After at least three cycles of input clock toggling. Output Enable function is asynchronous to eliminate any intermediate incorrect output clock cycles during transition which may cause frequency peaking to the downstream device.

## Absolute Maximum Ratings

The absolute maximum ratings are stress ratings only. Stresses greater than those listed below can cause permanent damage to the device. Functional operation of the 5PB11xx at absolute maximum ratings is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

**Table 3. Absolute Maximum Ratings**

| Item  | Rating                     |
|---|----------------------------|
| Supply Voltage, $V_{DD}$  | 3.8V                       |
| Output Enable and All Outputs                                   | -0.4 V to $V_{DD} + 0.5$ V |
| Input Voltage, CLKIN  | -0.4 V to 3.465V           |
| Ambient Operating Temperature (Industrial)                      | -40 to +85°C               |
| Ambient Operating Temperature (Extended and Automotive Grade 2) | -40 to +105°C              |
| Ambient Operating Temperature (Automotive Grade 1)              | -40 to +125°C              |
| Storage Temperature   | -65 to +150°C              |
| Junction Temperature  | 125°C                      |
| Soldering Temperature   | 260°C                      |

## Recommended Operating Conditions

**Table 4. Recommended Operating Conditions**

| Parameter   | Minimum | Typical | Maximum | Units |
|---|---------|---------|---------|-------|
| Ambient Operating Temperature (Industrial)                      | -40     |         | +85     | °C    |
| Ambient Operating Temperature (Extended and Automotive Grade 2) | -40     |         | +105    |       |
| Ambient Operating Temperature (Automotive Grade 1)              | -40     |         | +125    |       |
| Power Supply Voltage (measured in respect to GND)               | +1.71   |         | +3.465  | V     |

## Thermal Characteristics

**Table 5. Thermal Characteristics**

| Package   | Applies to                           | $\theta_{JA}$ | $\theta_{JC}$ | $\theta_{JB}$ | Units           |
|-----------|--------------------------------------|---------------|---------------|---------------|-----------------|
| 8-TSSOP   | 5PB1102PGG, 5PB1104PGG               | 122.0         | 58.2          | 139.3         | °C/W; still air |
| 14-TSSOP  | 5PB1106PGG                           | 84.5          | 44.2          | 64.5          | °C/W; still air |
| 16-TSSOP  | 5PB1108PGG                           | 80.9          | 43.3          | 60.1          | °C/W; still air |
| 20-TSSOP  | 5PB1110PGG                           | 72.5          | 37.9          | 49.8          | °C/W; still air |
| 8-DFN     | 5PB1102CMG, 5PB1104CMG<br>5PB1104CMT | 120.2         | 99.4          | 63.3          | °C/W; still air |
| 16-VFQFPN | 5PB1106CMG, 5PB1108CMG               | 115.6         | 83.1          | 61.8          | °C/W; still air |
| 20-VFQFPN | 5PB1110NDG                           | 49.6          | 94.7          | 5.1           | °C/W; still air |

## DC Electrical Characteristics

$V_{DD} = 1.8V, 2.5V, \text{ or } 3.3V$  (see tables below)

**Table 6. DC Electrical Characteristics –  $V_{DD} = 1.8V \pm 5\%$ , Industrial and Extended**

| Symbol   | Parameter                                | Applies to                             | Conditions             | Minimum | Typical | Maximum             | Units    |    |
|----------|--|--|------------------------|---------|---------|---------------------|----------|----|
| $V_{DD}$ | Operating Voltage                        | Industrial and Extended <sup>[2]</sup> |                        | 1.71    | 1.8     | 1.89                | V        |    |
| $V_{IH}$ | Input High Voltage, CLKIN <sup>[1]</sup> |  | $0.7 \times V_{DD}$    |         |         |                     | V        |    |
| $V_{IL}$ | Input Low Voltage, CLKIN <sup>[1]</sup>  |  |                        |         |         | $0.3 \times V_{DD}$ | V        |    |
| $V_{IH}$ | Input High Voltage, 1G                   |  | 1.6                    |         |         | $V_{DD}$            | V        |    |
| $V_{IL}$ | Input Low Voltage, 1G                    |  |                        |         |         | 0.6                 | V        |    |
| $V_{OH}$ | Output High Voltage                      |  | $I_{OH} = -5mA.$       | 1.4     |         |                     | V        |    |
| $V_{OL}$ | Output Low Voltage                       |  | $I_{OL} = 5mA.$        |         |         | 0.4                 | V        |    |
| $Z_O$    | Nominal Output Impedance                 |  |                        |         |         | 50                  | $\Omega$ |    |
| $C_{IN}$ | Input Capacitance                        |  | CLKIN, 1G pin.         |         |         | 5                   | pF       |    |
| $I_{DD}$ | Operating Supply Current, 5PB1102        |  | 100MHz, no load, 25°C. |         |         | 6                   | 8        | mA |
|          | Operating Supply Current, 5PB1104        |  |                        |         |         | 12                  | 13       |    |
|          | Operating Supply Current, 5PB1106        |  |                        |         |         | 15                  | 18       |    |
|          | Operating Supply Current, 5PB1108        |  |                        |         |         | 20                  | 23       |    |
|          | Operating Supply Current, 5PB1110        |  |                        |         |         | 23                  | 27       |    |
| $I_{IH}$ | Input High Leakage                       | $V_{IN} = V_{DD}$                      |                        |         |         | 5                   | $\mu A$  |    |
| $I_{IL}$ | Input Low Leakage                        | $V_{IN} = 0V$                          |                        |         |         | 5                   | $\mu A$  |    |

<sup>[1]</sup> Nominal switching threshold is  $V_{DD}/2$ .

<sup>[2]</sup> 5PB11xxPGGI, 5PB11xxPGGK, 5PB11xxCMGI, 5PB11xxCMGK.  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

**Table 7. DC Electrical Characteristics –  $V_{DD} = 1.8V \pm 5\%$ , Automotive**

| Symbol   | Parameter                     | Applies to        | Conditions              | Minimum        | Typical  | Maximum             | Units    |
|----------|-------------------------------|-------------------|-------------------------|----------------|----------|---------------------|----------|
| $V_{DD}$ | Operating Voltage             | Automotive [2][3] |                         | 1.71           | 1.8      | 1.89                | V        |
| $V_{IH}$ | Input High Voltage, CLKIN [1] |                   | $0.7 \times V_{DD}$     |                |          |                     | V        |
| $V_{IL}$ | Input Low Voltage, CLKIN [1]  |                   |                         |                |          | $0.3 \times V_{DD}$ | V        |
| $V_{IH}$ | Input High Voltage, 1G        |                   | 1.6                     |                | $V_{DD}$ |                     | V        |
| $V_{IL}$ | Input Low Voltage, 1G         |                   |                         |                |          | 0.6                 | V        |
| $V_{OH}$ | Output High Voltage           |                   | $I_{OH} = -5mA.$        | 1.2            |          |                     | V        |
| $V_{OL}$ | Output Low Voltage            |                   | $I_{OL} = 5mA.$         |                |          | 0.45                | V        |
| $Z_O$    | Nominal Output Impedance      |                   |                         |                |          | 50                  | $\Omega$ |
| $C_{IN}$ | Input Capacitance             |                   |                         | CLKIN, 1G pin. |          | 5                   |          |
| $I_{DD}$ | Operating Supply Current      | 5PB1104 [2]       | 0.001MHz, $C_L = 5pF.$  |                | 0.7      | 1                   | mA       |
|          |                               |                   | 0.008MHz, $C_L = 5pF.$  |                | 0.7      | 1                   |          |
|          |                               |                   | 40MHz, $C_L = 5pF.$     |                | 11       | 13                  |          |
|          |                               |                   | 100MHz, $C_L = 5pF.$    |                | 25       | 30                  |          |
|          |                               |                   | 156.25MHz, $C_L = 5pF.$ |                | 37       | 47                  |          |
|          |                               |                   | 200MHz, $C_L = 5pF.$    |                | 39       | 57                  |          |
| $I_{DD}$ | Operating Supply Current      | 5PB1110 [3]       | 0.001MHz, $C_L = 5pF.$  |                | 4.1      | 6.7                 | mA       |
|          |                               |                   | 0.008MHz, $C_L = 5pF.$  |                | 4.2      | 6.7                 |          |
|          |                               |                   | 40MHz, $C_L = 5pF.$     |                | 30       | 45                  |          |
|          |                               |                   | 100MHz, $C_L = 5pF.$    |                | 65       | 82                  |          |
|          |                               |                   | 156.25MHz, $C_L = 5pF.$ |                | 91       | 123                 |          |
|          |                               |                   | 200MHz, $C_L = 5pF.$    |                | 96       | 137                 |          |
| $I_{IH}$ | Input High Leakage            | Automotive [2][3] | $V_{IN} = V_{DD}$       |                |          | 5                   | $\mu A$  |
| $I_{IL}$ | Input Low Leakage             |                   | $V_{IN} = 0V$           |                |          | 5                   | $\mu A$  |

[1] Nominal switching threshold is  $V_{DD}/2$ .

[2] 5PB1104CMG1 and 5PB1104CMT1  $T_A = -40^\circ C$  to  $+125^\circ C$  unless stated otherwise.

[3] 5PB1110NDG2  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.



**Table 8. DC Electrical Characteristics –  $V_{DD} = 2.5V \pm 5\%$ , Industrial and Extended**

| Symbol   | Parameter                                | Applies to                             | Conditions        | Minimum                | Typical | Maximum             | Units    |          |
|----------|--|--|-------------------|------------------------|---------|---------------------|----------|----------|
| $V_{DD}$ | Operating Voltage                        | Industrial and Extended <sup>[2]</sup> |                   | 2.375                  | 2.5     | 2.625               | V        |          |
| $V_{IH}$ | Input High Voltage, CLKIN <sup>[1]</sup> |  |                   | $0.7 \times V_{DD}$    |         |                     | V        |          |
| $V_{IL}$ | Input Low Voltage, CLKIN <sup>[1]</sup>  |  |                   |                        |         | $0.3 \times V_{DD}$ | V        |          |
| $V_{IH}$ | Input High Voltage, 1G                   |  |                   |                        | 1.8     |                     | $V_{DD}$ | V        |
| $V_{IL}$ | Input Low Voltage, 1G                    |  |                   |                        |         |                     | 0.7      | V        |
| $V_{OH}$ | Output High Voltage                      |  |                   | $I_{OH} = -8mA.$       | 1.9     |                     |          | V        |
| $V_{OL}$ | Output Low Voltage                       |  |                   | $I_{OL} = 8mA.$        |         |                     | 0.5      | V        |
| $Z_O$    | Nominal Output Impedance                 |  |                   |                        |         | 50                  |          | $\Omega$ |
| $C_{IN}$ | Input Capacitance                        |  |                   | CLKIN, 1G pin.         |         | 5                   |          | pF       |
| $I_{DD}$ | Operating Supply Current, 5PB1102        |  |                   | 100MHz, no load, 25°C. |         | 9                   | 11       | mA       |
|          | Operating Supply Current, 5PB1104        |  |                   |                        |         | 15                  | 18       |          |
|          | Operating Supply Current, 5PB1106        |  |                   |                        |         | 21                  | 24       |          |
|          | Operating Supply Current, 5PB1108        |  |                   |                        |         | 27                  | 31       |          |
|          | Operating Supply Current, 5PB1110        |  |                   |                        | 32      | 37                  |          |          |
| $I_{IH}$ | Input High Leakage                       |  | $V_{IN} = V_{DD}$ |                        |         | 5                   | $\mu A$  |          |
| $I_{IL}$ | Input Low Leakage                        |  | $V_{IN} = 0V$     |                        |         | 5                   | $\mu A$  |          |

<sup>[1]</sup> Nominal switching threshold is  $V_{DD}/2$ .

<sup>[2]</sup> 5PB11xxPGGI, 5PB11xxPGGK, 5PB11xxCMGI, 5PB11xxCMGK.  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

**Table 9. DC Electrical Characteristics –  $V_{DD} = 2.5V \pm 5\%$ , Automotive**

| Symbol   | Parameter                     | Applies to        | Conditions              | Minimum        | Typical  | Maximum             | Units    |
|----------|-------------------------------|-------------------|-------------------------|----------------|----------|---------------------|----------|
| $V_{DD}$ | Operating Voltage             | Automotive [2][3] |                         | 2.375          | 2.5      | 2.625               | V        |
| $V_{IH}$ | Input High Voltage, CLKIN [1] |                   | $0.7 \times V_{DD}$     |                |          |                     | V        |
| $V_{IL}$ | Input Low Voltage, CLKIN [1]  |                   |                         |                |          | $0.3 \times V_{DD}$ | V        |
| $V_{IH}$ | Input High Voltage, 1G        |                   | 1.8                     |                | $V_{DD}$ |                     | V        |
| $V_{IL}$ | Input Low Voltage, 1G         |                   |                         |                |          | 0.7                 | V        |
| $V_{OH}$ | Output High Voltage           |                   | $I_{OH} = -8mA.$        | 1.6            |          |                     | V        |
| $V_{OL}$ | Output Low Voltage            |                   | $I_{OL} = 8mA.$         |                |          | 0.625               | V        |
| $Z_O$    | Nominal Output Impedance      |                   |                         |                |          | 50                  | $\Omega$ |
| $C_{IN}$ | Input Capacitance             |                   |                         | CLKIN, 1G pin. |          | 5                   |          |
| $I_{DD}$ | Operating Supply Current      | 5PB1104 [2]       | 0.001MHz, $C_L = 5pF.$  |                | 0.9      | 1.3                 | mA       |
|          |                               |                   | 0.008MHz, $C_L = 5pF.$  |                | 0.9      | 1.3                 |          |
|          |                               |                   | 40MHz, $C_L = 5pF.$     |                | 15       | 17                  |          |
|          |                               |                   | 100MHz, $C_L = 5pF.$    |                | 35       | 42                  |          |
|          |                               |                   | 156.25MHz, $C_L = 5pF.$ |                | 52       | 67                  |          |
|          |                               |                   | 200MHz, $C_L = 5pF.$    |                | 56       | 80                  |          |
| $I_{DD}$ | Operating Supply Current      | 5PB1110 [3]       | 0.001MHz, $C_L = 5pF.$  |                | 5.4      | 8.2                 | mA       |
|          |                               |                   | 0.008MHz, $C_L = 5pF.$  |                | 5.4      | 8.2                 |          |
|          |                               |                   | 40MHz, $C_L = 5pF.$     |                | 41       | 61                  |          |
|          |                               |                   | 100MHz, $C_L = 5pF.$    |                | 91       | 116                 |          |
|          |                               |                   | 156.25MHz, $C_L = 5pF.$ |                | 129      | 169                 |          |
|          |                               |                   | 200MHz, $C_L = 5pF.$    |                | 140      | 195                 |          |
| $I_{IH}$ | Input High Leakage            | Automotive [2][3] | $V_{IN} = V_{DD}$       |                |          | 5                   | $\mu A$  |
| $I_{IL}$ | Input Low Leakage             |                   | $V_{IN} = 0V$           |                |          | 5                   | $\mu A$  |

[1] Nominal switching threshold is  $V_{DD}/2$ .

[2] 5PB1104CMG1 and 5PB1104CMT1  $T_A = -40^\circ C$  to  $+125^\circ C$  unless stated otherwise.

[3] 5PB1110NDG2  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

**Table 10. DC Electrical Characteristics –  $V_{DD} = 3.3V \pm 5\%$ , Industrial and Extended**

| Symbol   | Parameter                                | Applies to                             | Conditions             | Minimum             | Typical | Maximum             | Units    |    |
|----------|--|--|------------------------|---------------------|---------|---------------------|----------|----|
| $V_{DD}$ | Operating Voltage                        | Industrial and Extended <sup>[2]</sup> |                        | 3.135               | 3.3     | 3.465               | V        |    |
| $V_{IH}$ | Input High Voltage, CLKIN <sup>[1]</sup> |  |                        | $0.7 \times V_{DD}$ |         |                     | V        |    |
| $V_{IL}$ | Input Low Voltage, CLKIN <sup>[1]</sup>  |  |                        |                     |         | $0.3 \times V_{DD}$ | V        |    |
| $V_{IH}$ | Input High Voltage, 1G                   |  |                        | 2.0                 |         | $V_{DD}$            | V        |    |
| $V_{IL}$ | Input Low Voltage, 1G                    |  |                        |                     |         | 0.8                 | V        |    |
| $V_{OH}$ | Output High Voltage                      |  | $I_{OH} = -12mA.$      | 2.4                 |         |                     | V        |    |
| $V_{OL}$ | Output Low Voltage                       |  | $I_{OL} = 12mA.$       |                     |         | 0.7                 | V        |    |
| $Z_O$    | Nominal Output Impedance                 |  |                        |                     |         | 50                  | $\Omega$ |    |
| $C_{IN}$ | Input Capacitance                        |  | CLKIN, 1G pin.         |                     |         | 5                   | pF       |    |
| $I_{DD}$ | Operating Supply Current, 5PB1102        |  | 100MHz, no load, 25°C. |                     |         | 12                  | 13       | mA |
|          | Operating Supply Current, 5PB1104        |  |                        |                     |         | 20                  | 22       |    |
|          | Operating Supply Current, 5PB1106        |  |                        |                     |         | 25                  | 30       |    |
|          | Operating Supply Current, 5PB1108        |  |                        |                     |         | 35                  | 38       |    |
|          | Operating Supply Current, 5PB1110        |  |                        |                     |         | 40                  | 45       |    |
| $I_{IH}$ | Input High Leakage                       |  | $V_{IN} = V_{DD}$      |                     |         | 5                   | $\mu A$  |    |
| $I_{IL}$ | Input Low Leakage                        |  | $V_{IN} = 0V$          |                     |         | 5                   | $\mu A$  |    |

<sup>[1]</sup> Nominal switching threshold is  $V_{DD}/2$ .

<sup>[2]</sup> 5PB11xxPGGI, 5PB11xxPGGK, 5PB11xxCMGI, 5PB11xxCMGK.  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

**Table 11. DC Electrical Characteristics –  $V_{DD} = 3.3V \pm 5\%$ , Automotive**

| Symbol   | Parameter                     | Applies to        | Conditions              | Minimum | Typical  | Maximum | Units    |
|----------|-------------------------------|-------------------|-------------------------|---------|----------|---------|----------|
| $V_{DD}$ | Operating Voltage             | Automotive [2][3] |                         | 3.135   | 3.3      | 3.465   | V        |
| $V_{IH}$ | Input High Voltage, CLKIN [1] |                   | $0.7 \times V_{DD}$     |         |          |         | V        |
| $V_{IL}$ | Input Low Voltage, CLKIN [1]  |                   | $0.3 \times V_{DD}$     |         |          |         | V        |
| $V_{IH}$ | Input High Voltage, 1G        |                   | 2.1                     |         | $V_{DD}$ |         | V        |
| $V_{IL}$ | Input Low Voltage, 1G         |                   |                         |         |          | 08      | V        |
| $V_{OH}$ | Output High Voltage           |                   | $I_{OH} = -12mA.$       |         | 2.1      |         |          |
| $V_{OL}$ | Output Low Voltage            | 5PB1104 [2]       | $I_{OL} = 12mA.$        |         |          | 0.825   | V        |
|          |                               | 5PB1110 [3]       | $I_{OL} = 12mA.$        |         |          | 0.850   | V        |
| $Z_O$    | Nominal Output Impedance      | Automotive [2][3] |                         |         | 50       |         | $\Omega$ |
| $C_{IN}$ | Input Capacitance             |                   | CLKIN, 1G pin.          |         | 5        |         | pF       |
| $I_{DD}$ | Operating Supply Current      | 5PB1104 [2]       | 0.001MHz, $C_L = 5pF.$  |         | 1.2      | 1.7     | mA       |
|          |                               |                   | 0.008MHz, $C_L = 5pF.$  |         | 1.2      | 1.7     |          |
|          |                               |                   | 40MHz, $C_L = 5pF.$     |         | 19       | 22      |          |
|          |                               |                   | 100MHz, $C_L = 5pF.$    |         | 45       | 54      |          |
|          |                               |                   | 156.25MHz, $C_L = 5pF.$ |         | 67       | 87      |          |
|          |                               |                   | 200MHz, $C_L = 5pF.$    |         | 75       | 107     |          |
| $I_{DD}$ | Operating Supply Current      | 5PB1110 [3]       | 0.001MHz, $C_L = 5pF.$  |         | 7.2      | 10.2    | mA       |
|          |                               |                   | 0.008MHz, $C_L = 5pF.$  |         | 7.2      | 10.2    |          |
|          |                               |                   | 40MHz, $C_L = 5pF.$     |         | 52       | 67      |          |
|          |                               |                   | 100MHz, $C_L = 5pF.$    |         | 117      | 147     |          |
|          |                               |                   | 156.25MHz, $C_L = 5pF.$ |         | 168      | 234     |          |
|          |                               |                   | 200MHz, $C_L = 5pF.$    |         | 186      | 256     |          |
| $I_{IH}$ | Input High Leakage            | Automotive [2][3] | $V_{IN} = V_{DD}$       |         |          | 5       | $\mu A$  |
| $I_{IL}$ | Input Low Leakage             |                   | $V_{IN} = 0V$           |         |          | 5       | $\mu A$  |

[1] Nominal switching threshold is  $V_{DD}/2$ .

[2] 5PB1104CMG1 and 5PB1104CMT1  $T_A = -40^\circ C$  to  $+125^\circ C$  unless stated otherwise.

[3] 5PB1110NDG2  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

## AC Electrical Characteristics

$V_{DD} = 1.8V, 2.5V, \text{ or } 3.3V$  (see tables below).

**Table 12. AC Electrical Characteristics –  $V_{DD} = 1.8V \pm 5\%$ , Industrial and Extended**

| Symbol         | Parameter                         | Applies to                             | Conditions   | Minimum | Typical | Maximum | Units  |
|----------------|-----------------------------------|--|--|---------|---------|---------|--------|
|                | Input Frequency                   | Industrial and Extended <sup>[1]</sup> |  | 0       |         | 200     | MHz    |
| $t_{OR}$       | Output Rise Time (2pF load)       |  | 0.36V to 1.44V, $C_L = 2pF$ .                                |         | 0.5     | 0.75    | ns     |
| $t_{OF}$       | Output Fall Time (2pF load)       |  | 1.44V to 0.36V, $C_L = 2pF$ .                                |         | 0.5     | 0.75    | ns     |
| $t_{OR}$       | Output Rise Time (5pF load)       |  | 0.36V to 1.44V, $C_L = 5pF$ .                                |         | 0.8     | 1.0     | ns     |
| $t_{OF}$       | Output Fall Time (5pF load)       |  | 1.44V to 0.36V, $C_L = 5pF$ .                                |         | 0.8     | 1.0     | ns     |
| $t_{START-UP}$ | Start-up Time                     |  | Part start-up time for valid outputs after $V_{DD}$ ramp-up. |         |         | 3       | ms     |
| $t_{PD}$       | Propagation Delay <sup>[2]</sup>  |  |  | 1.5     |         | 2.5     | ns     |
|                | Buffer Additive Phase Jitter, RMS |  | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.05    | ps     |
|                | Output to Output Skew, 5PB1102/04 |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 50      | ps     |
|                | Output to Output Skew, 5PB1106    |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 58      | ps     |
|                | Output to Output Skew, 5PB1108/10 |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 45      | 65      | ps     |
|                | Device to Device Skew             |  | Rising edges at $V_{DD}/2$ .                                 |         |         | 200     | ps     |
| $t_{EN}$       | Output Enable Time                |  | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DIS}$      | Output Disable Time               |  | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DC}$       | Duty Cycle <sup>[4]</sup>         |  |  | 50      |         | %       |        |

<sup>1</sup> 5PB11xxPGGI, 5PB11xxPGGK, 5PB11xxCMGI, 5PB11xxCMGK.  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

<sup>2</sup> With rail-to-rail input clock.

<sup>3</sup> Between any 2 outputs with equal loading.

<sup>4</sup> Duty cycle on outputs will match incoming clock duty cycle when  $V_{IH}$  on CLKIN pin equals  $V_{DD}$  power supply voltage. Consult Renesas for tight duty cycle clock generators.

**Table 13. AC Electrical Characteristics –  $V_{DD} = 1.8V \pm 5\%$ , Automotive**

| Symbol         | Parameter                         | Applies to        | Conditions   | Minimum | Typical | Maximum | Units  |
|----------------|-----------------------------------|-------------------|--|---------|---------|---------|--------|
|                | Input Frequency                   | Automotive [1][5] |  | 0       |         | 200     | MHz    |
| $t_{OR}$       | Output Rise Time (5pF load)       |                   | 0.36V to 1.44V, $C_L = 5pF$ .                                |         | 0.65    | 1.2     | ns     |
| $t_{OF}$       | Output Fall Time (5pF load)       | 5PB1104[1]        | 1.44V to 0.36V, $C_L = 5pF$ .                                |         | 0.65    | 1.2     | ns     |
|                |                                   | 5PB1110[5]        | 1.44V to 0.36V, $C_L = 5pF$ .                                |         | 0.65    | 1.25    | ns     |
| $t_{START-UP}$ | Start-up Time                     | 5PB1104[1]        | Part start-up time for valid outputs after $V_{DD}$ ramp-up. |         |         | 3       | ms     |
|                |                                   | 5PB1110[5]        | Part start-up time for valid outputs after $V_{DD}$ ramp-up. |         |         | 3.2     | ms     |
| $t_{PD}$       | Propagation Delay [2]             | 5PB1104[1]        |  | 1.0     |         | 3.4     | ns     |
|                |                                   | 5PB1110[5]        |  | 1.0     |         | 4.0     | ns     |
|                | Buffer Additive Phase Jitter, RMS | 5PB1104[1]        | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.06    | ps     |
|                |                                   | 5PB1110[5]        | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.068   | ps     |
|                | Output to Output Skew             | Automotive [1][5] | Rising edges at $V_{DD}/2$ . [3]                             |         | 35      | 87      | ps     |
|                | Device to Device Skew             |                   | Rising edges at $V_{DD}/2$ .                                 |         |         | 200     | ps     |
| $t_{EN}$       | Output Enable Time                |                   | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DIS}$      | Output Disable Time               |                   | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DC}$       | Duty Cycle [4]                    |                   |  |         |         | 50      | %      |

<sup>1</sup> 5PB1104CMG1 and 5PB1104CMT1  $T_A = -40^\circ C$  to  $+125^\circ C$  unless stated otherwise.

<sup>2</sup> With rail-to-rail input clock.

<sup>3</sup> Between any 2 outputs with equal loading.

<sup>4</sup> Duty cycle on outputs will match incoming clock duty cycle when  $V_{IH}$  on CLKIN pin equals  $V_{DD}$  power supply voltage. Consult Renesas for tight duty cycle clock generators.

<sup>5</sup> 5PB1110NDG2  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

**Table 14. AC Electrical Characteristics –  $V_{DD} = 2.5V \pm 5\%$ , Industrial and Extended**

| Symbol         | Parameter                                    | Applies to                             | Conditions   | Minimum | Typical | Maximum | Units  |
|----------------|--|--|--|---------|---------|---------|--------|
|                | Input Frequency                              | Industrial and Extended <sup>[1]</sup> |  | 0       |         | 200     | MHz    |
| $t_{OR}$       | Output Rise Time (2pF load)                  |  | 0.5V to 2.0V, $C_L = 2pF$ .                                  |         | 0.4     | 0.7     | ns     |
| $t_{OF}$       | Output Fall Time (2pF load)                  |  | 2.0V to 0.5V, $C_L = 2pF$ .                                  |         | 0.4     | 0.7     | ns     |
| $t_{OR}$       | Output Rise Time (5pF load)                  |  | 0.5V to 2.0V, $C_L = 5pF$ .                                  |         | 0.75    | 1.0     | ns     |
| $t_{OF}$       | Output Fall Time (5pF load)                  |  | 2.0V to 0.5V, $C_L = 5pF$ .                                  |         | 0.75    | 1.0     | ns     |
| $t_{START-UP}$ | Start-up Time                                |  | Part start-up time for valid outputs after $V_{DD}$ ramp-up. |         |         | 3       | ms     |
| $t_{PD}$       | Propagation Delay, 5PB1102/04 <sup>[2]</sup> |  |  | 1.9     |         | 2.9     | ns     |
|                | Propagation Delay, 5PB1106/08 <sup>[2]</sup> |  |  | 2.0     |         | 3.3     | ns     |
|                | Propagation Delay, 5PB1110 <sup>[2]</sup>    |  |  | 2.0     |         | 3.0     | ns     |
|                | Buffer Additive Phase Jitter, RMS            |  | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.05    | ps     |
|                | Output to Output Skew, 5PB1102/04            |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 50      | ps     |
|                | Output to Output Skew, 5PB1106               |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 58      | ps     |
|                | Output to Output Skew, 5PB1108/10            |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 45      | 65      | ps     |
|                | Device to Device Skew                        |  | Rising edges at $V_{DD}/2$ .                                 |         |         | 200     | ps     |
| $t_{EN}$       | Output Enable Time                           |  | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DIS}$      | Output Disable Time                          | $C_L \leq 5pF$ .                       |  |         | 3       | cycles  |        |
| $t_{DC}$       | Duty Cycle <sup>[4]</sup>                    |  |  | 50      |         | %       |        |

<sup>1</sup> 5PB11xxPGGI, 5PB11xxPGGK, 5PB11xxCMGI, 5PB11xxCMGK.  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

<sup>2</sup> With rail-to-rail input clock.

<sup>3</sup> Between any 2 outputs with equal loading.

<sup>4</sup> Duty cycle on outputs will match incoming clock duty cycle when  $V_{IH}$  on CLKIN pin equals  $V_{DD}$  power supply voltage. Consult Renesas for tight duty cycle clock generators.

**Table 15. AC Electrical Characteristics – V<sub>DD</sub> = 2.5V ±5%, Automotive**

| Symbol                | Parameter                         | Applies to                   | Conditions  | Minimum | Typical | Maximum | Units  |
|-----------------------|-----------------------------------|------------------------------|---|---------|---------|---------|--------|
|                       | Input Frequency                   | Automotive <sup>[1][5]</sup> |   | 0       |         | 200     | MHz    |
| t <sub>OR</sub>       | Output Rise Time (5pF load)       |                              | 0.5V to 2.0V, C <sub>L</sub> = 5pF.                                 |         | 0.63    | 1.2     | ns     |
| t <sub>OF</sub>       | Output Fall Time (5pF load)       |                              | 2.0V to 0.5V, C <sub>L</sub> = 5pF.                                 |         | 0.63    | 1.2     | ns     |
| t <sub>START-UP</sub> | Start-up Time                     |                              | Part start-up time for valid outputs after V <sub>DD</sub> ramp-up. |         |         | 3       | ms     |
| t <sub>PD</sub>       | Propagation Delay <sup>[2]</sup>  | 5PB1104 <sup>[1]</sup>       |   | 1.0     |         | 4.5     | ns     |
|                       |                                   | 5PB1110 <sup>[5]</sup>       |   |         |         | 4.75    | ns     |
|                       | Buffer Additive Phase Jitter, RMS | 5PB1104 <sup>[1]</sup>       | 156.25MHz, Integration Range: 12kHz–20MHz.                          |         |         | 0.06    | ps     |
|                       |                                   | 5PB1110 <sup>[5]</sup>       | 156.25MHz, Integration Range: 12kHz–20MHz.                          |         |         | 0.065   | ps     |
|                       | Output to Output Skew             | Automotive <sup>[1][5]</sup> | Rising edges at V <sub>DD</sub> /2. <sup>[3]</sup>                  |         | 35      | 87      | ps     |
|                       | Device to Device Skew             |                              | Rising edges at V <sub>DD</sub> /2.                                 |         |         | 200     | ps     |
| t <sub>EN</sub>       | Output Enable Time                |                              | C <sub>L</sub> ≤ 5pF.   |         |         | 3       | cycles |
| t <sub>DIS</sub>      | Output Disable Time               |                              | C <sub>L</sub> ≤ 5pF.   |         |         | 3       | cycles |
| t <sub>DC</sub>       | Duty Cycle <sup>[4]</sup>         |                              |   |         |         | 50      | %      |

<sup>1</sup> 5PB1104CMG1 and 5PB1104CMT1 T<sub>A</sub> = -40°C to +125°C unless stated otherwise.

<sup>2</sup> With rail-to-rail input clock.

<sup>3</sup> Between any 2 outputs with equal loading.

<sup>4</sup> Duty cycle on outputs will match incoming clock duty cycle when VIH on CLKIN pin equals VDD power supply voltage. Consult Renesas for tight duty cycle clock generators.

<sup>5</sup> 5PB1110NDG2 T<sub>A</sub> = -40°C to +105°C unless stated otherwise.



**Table 16. AC Electrical Characteristics –  $V_{DD} = 3.3V \pm 5\%$ , Industrial and Extended**

| Symbol         | Parameter                                    | Applies to                             | Conditions   | Minimum | Typical | Maximum | Units  |
|----------------|--|--|--|---------|---------|---------|--------|
|                | Input Frequency                              | Industrial and Extended <sup>[1]</sup> |  | 0       |         | 200     | MHz    |
| $t_{OR}$       | Output Rise Time (2pF load)                  |  | 0.66V to 2.64V, $C_L = 2pF$ .                                |         | 0.45    | 0.6     | ns     |
| $t_{OF}$       | Output Fall Time (2pF load)                  |  | 2.64V to 0.66V, $C_L = 2pF$ .                                |         | 0.45    | 0.6     | ns     |
| $t_{OR}$       | Output Rise Time (5pF load)                  |  | 0.66V to 2.64V, $C_L = 5pF$ .                                |         | 0.7     | 1.0     | ns     |
| $t_{OF}$       | Output Fall Time (5pF load)                  |  | 2.64V to 0.66V, $C_L = 5pF$ .                                |         | 0.7     | 1.0     | ns     |
| $t_{START-UP}$ | Start-up Time                                |  | Part start-up time for valid outputs after $V_{DD}$ ramp-up. |         |         | 3       | ms     |
| $t_{PD}$       | Propagation Delay, 5PB1102/04 <sup>[2]</sup> |  |  | 1.7     |         | 2.4     | ns     |
|                | Propagation Delay, 5PB1106/08 <sup>[2]</sup> |  |  | 1.7     |         | 2.7     | ns     |
|                | Propagation Delay, 5PB1110 <sup>[2]</sup>    |  |  | 1.7     |         | 2.5     | ns     |
|                | Buffer Additive Phase Jitter, RMS            |  | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.05    | ps     |
|                | Output to Output Skew, 5PB1102/04            |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 50      | ps     |
|                | Output to Output Skew, 5PB1106               |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 58      | ps     |
|                | Output to Output Skew, 5PB1108/10            |  | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 45      | 65      | ps     |
|                | Device to Device Skew                        |  | Rising edges at $V_{DD}/2$ .                                 |         |         | 200     | ps     |
| $t_{EN}$       | Output Enable Time                           |  | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DIS}$      | Output Disable Time                          | $C_L \leq 5pF$ .                       |  |         | 3       | cycles  |        |
| $t_{DC}$       | Duty Cycle <sup>[4]</sup>                    |  |  | 50      |         | %       |        |

<sup>1</sup> 5PB11xxPGGI, 5PB11xxPGGK, 5PB11xxCMGI, 5PB11xxCMGK.  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

<sup>2</sup> With rail-to-rail input clock.

<sup>3</sup> Between any 2 outputs with equal loading.

<sup>4</sup> Duty cycle on outputs will match incoming clock duty cycle when  $V_{IH}$  on CLKIN pin equals  $V_{DD}$  power supply voltage. Consult Renesas for tight duty cycle clock generators.

**Table 17. AC Electrical Characteristics –  $V_{DD} = 3.3V \pm 5\%$ , Automotive**

| Symbol         | Parameter                         | Applies to                   | Conditions   | Minimum | Typical | Maximum | Units  |
|----------------|-----------------------------------|------------------------------|--|---------|---------|---------|--------|
|                | Input Frequency                   | Automotive <sup>[1][5]</sup> |  | 0       |         | 200     | MHz    |
| $t_{OR}$       | Output Rise Time (5pF load)       |                              | 0.66V to 2.64V, $C_L = 5pF$ .                                |         | 0.61    | 1.2     | ns     |
| $t_{OF}$       | Output Fall Time (5pF load)       |                              | 2.64V to 0.66V, $C_L = 5pF$ .                                |         | 0.61    | 1.2     | ns     |
| $t_{START-UP}$ | Start-up Time                     |                              | Part start-up time for valid outputs after $V_{DD}$ ramp-up. |         |         | 3       | ms     |
| $t_{PD}$       | Propagation Delay <sup>[2]</sup>  | 5PB1104 <sup>[1]</sup>       |  | 1.0     |         | 3.4     | ns     |
|                |                                   | 5PB1110 <sup>[5]</sup>       |  | 1.0     |         | 4.0     | ns     |
|                | Buffer Additive Phase Jitter, RMS | 5PB1104 <sup>[1]</sup>       | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.05    | ps     |
|                |                                   | 5PB1110 <sup>[5]</sup>       | 156.25MHz, Integration Range: 12kHz–20MHz.                   |         |         | 0.065   | ps     |
|                | Output to Output Skew             | Automotive <sup>[1][5]</sup> | Rising edges at $V_{DD}/2$ . <sup>[3]</sup>                  |         | 35      | 87      | ps     |
|                | Device to Device Skew             |                              | Rising edges at $V_{DD}/2$ .                                 |         |         | 200     | ps     |
| $t_{EN}$       | Output Enable Time                |                              | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DIS}$      | Output Disable Time               |                              | $C_L \leq 5pF$ .   |         |         | 3       | cycles |
| $t_{DC}$       | Duty Cycle <sup>[4]</sup>         |                              |  |         |         | 50      | %      |

<sup>1</sup> 5PB1104CMG1 and 5PB1104CMT1 only.  $T_A = -40^\circ C$  to  $+125^\circ C$  unless stated otherwise.

<sup>2</sup> With rail-to-rail input clock.

<sup>3</sup> Between any 2 outputs with equal loading.

<sup>4</sup> Duty cycle on outputs will match incoming clock duty cycle when  $V_{IH}$  on CLKIN pin equals  $V_{DD}$  power supply voltage. Consult Renesas for tight duty cycle clock generators.

<sup>5</sup> 5PB1110NDG2  $T_A = -40^\circ C$  to  $+105^\circ C$  unless stated otherwise.

## Phase Noise Plots

The phase noise plots show the low additive jitter of the 5PB11xx high-performance buffer. With an integration range of 12kHz to 20MHz, the reference input has about 58.9fs of RMS phase jitter while the output of 5PB11xx has about 70.9fs of RMS phase jitter. This results in a low additive phase jitter of only 39fs.




Reference Phase Noise 58.9fs (12kHz to 20MHz)



Output Phase Noise 70.9fs (12kHz to 20MHz)


## Test Load and Circuit

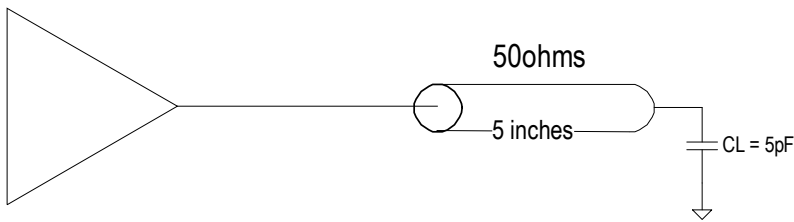

## Package Outline Drawings

The package outline drawings ([PGG8D1](#), [PGG14T1](#), [PGG16T1](#), [PGG20D1](#), [CMG8](#), [CMG16](#), [NDG20P2](#), [NDG20S2](#), [CMT8D1](#)) are appended at the end of this document. The package information is the most current data available.

## Marking Diagrams (Industrial)




8-pin TSSOP



14-pin TSSOP




16-pin TSSOP

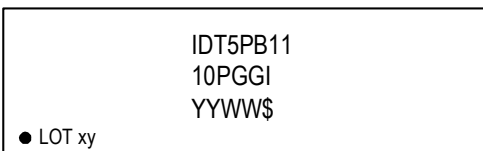


20-pin TSSOP




8-pin DFN



16-pin VFQFPN



16-pin VFQFPN




20-pin VFQFPN

- “AA” denotes the last two digits of the part number for 8-TSSOP and DFN (e.g. 02, 04).
- “\*\*” is the lot sequence.
- “XXX” denotes the last three characters of the Asm lot (20-VFQFPN only).
- “YYWW”, “YWW”, “YW”, or “Y” is the last digit(s) of the year and work week that the part was assembled.
- “\$” denotes the mark code.
- “G” after the two-letter package code denotes RoHS compliant package.
- “I” denotes industrial temperature range device.


## Marking Diagrams (Extended)



8-pin TSSOP

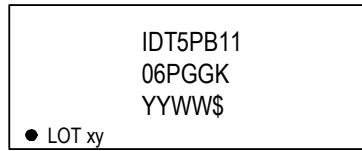

14-pin TSSOP

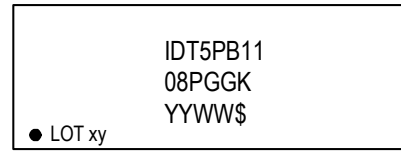


16-pin TSSOP




20-pin TSSOP




8-pin DFN



16-pin VFQFPN




16-pin VFQFPN




20-pin VFQFPN

- “AA” denotes the last two digits of the part number for 8-TSSOP and DFN (e.g. 02, 04).
- “\*\*” is the lot sequence.
- “XXX” denotes the last three characters of the Asm lot (20-VFQFPN only).
- “YYWW”, “YWW”, “YW”, or “Y” is the last digit(s) of the year and week that the part was assembled.
- “\$” denotes the mark code.
- “G” after the two-letter package code denotes RoHS compliant package.
- “K” denotes extended temperature range device.


## Marking Diagrams (Automotive)



8-pin DFN



8-pin DFN (wetttable flank)



20-pin VFQFPN (wetttable flank)

- Line 1:
  - For 8-pin devices: truncated part number; last number is the temperature grade: 1 = Automotive Grade 1.
  - For 20-pin device: “XXX” denotes ASM lot number.
- Line 2:
  - “YW” or “YWW” is the last digit(s) of the year and work week that the part was assembled.
  - “\*\*” denotes the lot sequence number.
- “1102” on 20-pin device denotes truncated part number; last number is the temperature grade: 2 = Automotive Grade 2.

## Ordering Information (Industrial)

| Orderable Part Number        | Package                               | Carrier Type  | Temperature  |
|------------------------------|---------------------------------------|---------------|--------------|
| 5PB1102PGGI                  | 4.4mm body, <b>8-TSSOP</b>            | Tubes         | -40 to +85°C |
| 5PB1102PGGI8                 |                                       | Tape and Reel |              |
| 5PB1104PGGI                  |                                       | Tubes         |              |
| 5PB1104PGGI8                 |                                       | Tape and Reel |              |
| 5PB1106PGGI                  | 4.4mm body, <b>14-TSSOP</b>           | Tubes         |              |
| 5PB1106PGGI8                 |                                       | Tape and Reel |              |
| 5PB1108PGGI                  | 4.4mm body, <b>16-TSSOP</b>           | Tubes         |              |
| 5PB1108PGGI8                 |                                       | Tape and Reel |              |
| 5PB1110PGGI                  | 4.4mm body, <b>20-TSSOP</b>           | Tubes         |              |
| 5PB1110PGGI8                 |                                       | Tape and Reel |              |
| 5PB1102CMGI                  | 2.0 × 2.0 × 0.5 mm, <b>8-DFN</b>      | Cut Tape      |              |
| 5PB1102CMGI8                 |                                       | Tape and Reel |              |
| 5PB1104CMGI                  |                                       | Cut Tape      |              |
| 5PB1104CMGI8                 |                                       | Tape and Reel |              |
| 5PB1104CMGI/W <sup>[a]</sup> |                                       | Tape and Reel |              |
| 5PB1106CMGI                  | 2.5 × 2.5 × 0.5 mm, <b>16-VFQFPN</b>  | Cut Tape      |              |
| 5PB1106CMGI8                 |                                       | Tape and Reel |              |
| 5PB1108CMGI                  |                                       | Cut Tape      |              |
| 5PB1108CMGI8                 |                                       | Tape and Reel |              |
| 5PB1110NDGI                  | 3.0 × 3.0 × 0.90 mm, <b>20-VFQFPN</b> | Tubes         |              |
| 5PB1110NDGI8                 |                                       | Tape and Reel |              |

[a] "/W" stands for tape and reel with pin 1 orientation: EIA-481-D. All other tape and reels options come with EIA-481-C pin 1 orientation.

## Ordering Information (Extended)

| Orderable Part Number        | Package                               | Carrier Type  | Temperature   |
|------------------------------|---------------------------------------|---------------|---------------|
| 5PB1102PGGK                  | 4.4mm body, <b>8-TSSOP</b>            | Tubes         | -40 to +105°C |
| 5PB1102PGGK8                 |                                       | Tape and Reel |               |
| 5PB1104PGGK                  |                                       | Tubes         |               |
| 5PB1104PGGK8                 |                                       | Tape and Reel |               |
| 5PB1106PGGK                  | 4.4mm body, <b>14-TSSOP</b>           | Tubes         |               |
| 5PB1106PGGK8                 |                                       | Tape and Reel |               |
| 5PB1108PGGK                  | 4.4mm body, <b>16-TSSOP</b>           | Tubes         |               |
| 5PB1108PGGK8                 |                                       | Tape and Reel |               |
| 5PB1110PGGK                  | 4.4mm body, <b>20-TSSOP</b>           | Tubes         |               |
| 5PB1110PGGK8                 |                                       | Tape and Reel |               |
| 5PB1102CMGK                  | 2.0 × 2.0 × 0.5 mm, <b>8-DFN</b>      | Cut Tape      |               |
| 5PB1102CMGK8                 |                                       | Tape and Reel |               |
| 5PB1104CMGK                  |                                       | Cut Tape      |               |
| 5PB1104CMGK8                 |                                       | Tape and Reel |               |
| 5PB1104CMGK/W <sup>[a]</sup> |                                       | Tape and Reel |               |
| 5PB1106CMGK                  | 2.5 × 2.5 × 0.5 mm, <b>16-VFQFPN</b>  | Cut Tape      |               |
| 5PB1106CMGK8                 |                                       | Tape and Reel |               |
| 5PB1108CMGK                  |                                       | Cut Tape      |               |
| 5PB1108CMGK8                 |                                       | Tape and Reel |               |
| 5PB1110NDGK                  | 3.0 × 3.0 × 0.90 mm, <b>20-VFQFPN</b> | Tubes         |               |
| 5PB1110NDGK8                 |                                       | Tape and Reel |               |

[a] "/W" stands for tape and reel with pin 1 orientation: EIA-481-D. All other tape and reels options come with EIA-481-C pin 1 orientation.

## Ordering Information (Automotive)

| Orderable Part Number | Package  | Carrier Type  | Temperature    |
|-----------------------|--|---------------|----------------|
| 5PB1104CMG1           | 2.0 × 2.0 × 0.5 mm, <b>8-DFN</b>                         | Cut Tape      | -40° to +125°C |
| 5PB1104CMG18          |  | Tape and Reel |                |
| 5PB1104CMT1           | 2.0 × 2.0 × 0.5 mm, <b>8-DFN</b> ,<br>Wettable flank     | Cut Tape      | -40° to +125°C |
| 5PB1104CMT18          |  | Tape and Reel |                |
| 5PB1110NDG2           | 3.0 × 3.0 × 0.9 mm, <b>20-VFQFPN</b> ,<br>Wettable flank | Tube          | -40° to +105°C |
| 5PB1110NDG28          |  | Tape and Reel |                |

## Ordering Information (Special Material Request)

For customers with a special material request, an alphanumeric code is assigned to the standard part number (see examples below). Contact Renesas for more information.






| Standard Part Number Example | Special Material Request Part Number <sup>[a]</sup> |
|------------------------------|---|
| 5PB1104CMGI                  | 5PB1104CMGI/X                                       |
| 5PB1104CMGI8                 | 5PB1104CMGI8/X                                      |

[a] "/X" is a code added to the standard part number when a customer has a special request for material. If no special material is requested, "/X" can be omitted.

## Revision History


| Revision Date      | Description of Change  |
|--------------------|--|
| March 31, 2021     | Added Ordering Information (Special Material Request) table.   |
| March 11, 2021     | Added 5PB1110NDG2 automotive device information.   |
| January 5, 2021    | Updated supply voltage pin numbers for 5PB1110PGG in TSSOP Pin Descriptions table.   |
| December 2, 2020   | <ul style="list-style-type: none"> <li>▪ Added 5PB1104CMG/W option to the ordering information (Extended) table.</li> <li>▪ Updated Package Outline Drawings links.</li> </ul> |
| September 29, 2020 | Updated marking diagrams for 5PB1106/08/10PGGI and 5PB1106/08/10PGGK.  |
| January 31, 2020   | Rebranded the document as Renesas. No technical changes were made.   |
| December 4, 2019   | Added Input High and Low Leakage parameters to tables 6–11.  |
| May 31, 2019       | <ul style="list-style-type: none"> <li>▪ Added 5PB1104CMT1 wettable flank package information.</li> <li>▪ Updated Propagation Delay values for automotive.</li> </ul>          |
| December 18, 2018  | <ul style="list-style-type: none"> <li>▪ Updated <math>t_{PD}</math> and skew values.</li> <li>▪ Added 5PB1104CMG1 automotive part information.</li> </ul>                     |
| October 24, 2018   | Initial release.   |



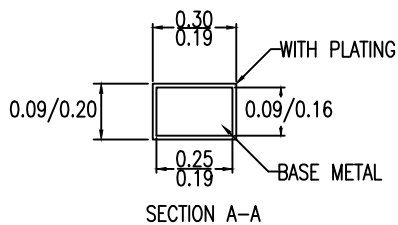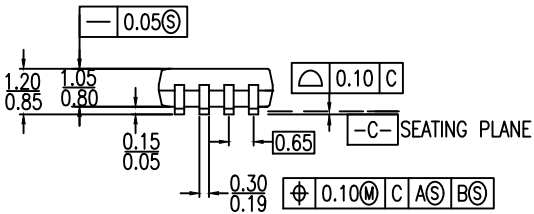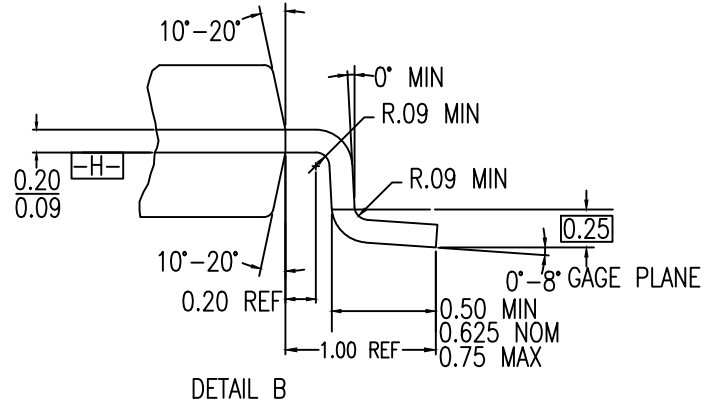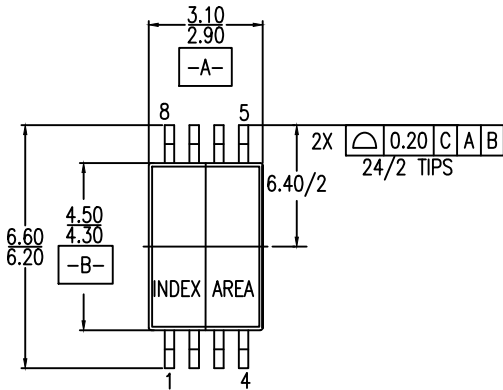

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. ALL DIMENSION ARE IN MM.


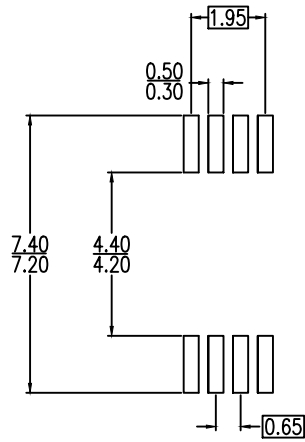


RECOMMENDED LAND PATTERN DIMENSIONS

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS

| Package Revision History |         |                 |
|--------------------------|---------|-----------------|
| Date Created             | Rev No. | Description     |
| July 27, 2018            | Rev 00  | Initial Release |

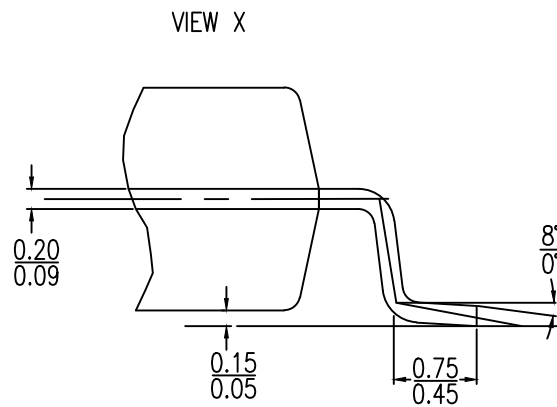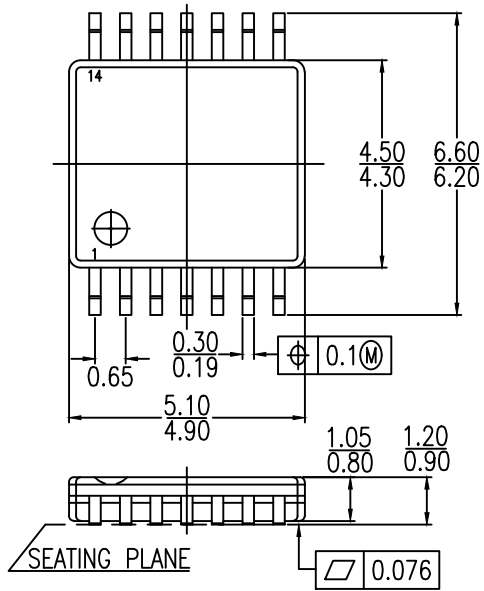

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS





LAND PATTERN DIMENSIONS

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS

| Package Revision History |         |                    |
|--------------------------|---------|--------------------|
| Date Created             | Rev No. | Description        |
| Mar, 10 2017             | Rev 01  | Added Land Pattern |
| Dec, 19 2017             | Rev 02  | New Format         |

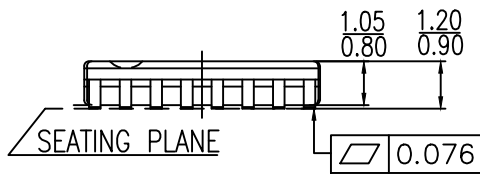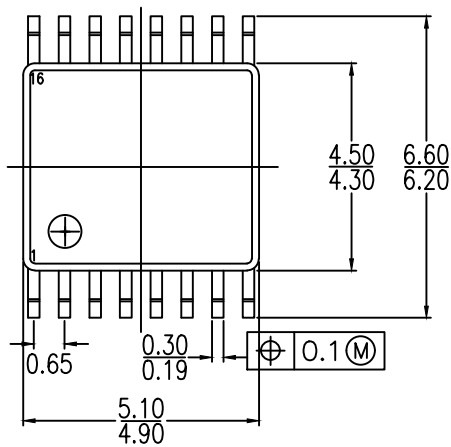

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS



LAND PATTERN DIMENSIONS

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS

| Package Revision History |         |                                |
|--------------------------|---------|--------------------------------|
| Date Created             | Rev No. | Description                    |
| Jan 26, 2018             | Rev 00  | Revised from PSC-4056-02 PGG16 |





RECOMMENDED LAND PATTERN DIMENSIONS


NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS

| Package Revision History |         |                 |
|--------------------------|---------|-----------------|
| Date Created             | Rev No. | Description     |
| July 24, 2018            | Rev 00  | Initial Release |



| REVISIONS                                    |     |                     |        |
|--|-----|---------------------|--------|
| DATE CREATED                                 | REV | DESCRIPTION         | AUTHOR |
| 09/18/14                                     | 00  | INITIAL RELEASE     | J.HUA  |
| 4/5/18                                       | 01  | CHANGE VFQFN to DFN | R.C    |
| NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE |     |                     |        |

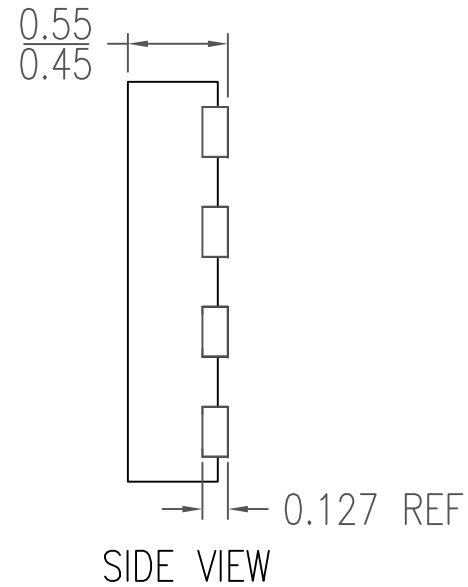

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. ALL DIMENSIONS ARE IN MILLIMETERS

|   |  |              |
|---|--|--------------|
| TOLERANCES<br>UNLESS SPECIFIED<br>DECIMAL ANGULAR<br>XX± ±<br>XXX± ±<br>XXXX± ± | <b>IDT</b> 6024 SILVER CREEK VALLEY ROAD<br>San Jose, CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 492-8674<br><small>www.IDT.com</small> |              |
|   | TITLE CMC8 Package Outline Drawing<br>2.0 x 2.0 x 0.5 mm Body<br>0.5mm Pitch DFN   |              |
| SIZE<br>C   | DRAWING No.<br>PSC-4490  | REV<br>01    |
| DO NOT SCALE DRAWING  |  | SHEET 1 OF 2 |

| REVISIONS                                    |     |                    |        |
|--|-----|--------------------|--------|
| DATE CREATED                                 | REV | DESCRIPTION        | AUTHOR |
| 09/18/14                                     | 00  | INITIAL RELEASE    | J.HUA  |
| 4/5/18                                       | 01  | CHANGE VQFN to DFN | R.C    |
| NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE |     |                    |        |



### RECOMMENDED LAND PATTERN DIMENSION




#### NOTES:

1. ALL DIMENSION ARE IN MM. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED.
3. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR MOUNT DESIGN AND LAND PATTERN.


|                                |             |  |
|--------------------------------|-------------|--|
| TOLERANCES<br>UNLESS SPECIFIED |             |  <b>IDT</b> 6024 SILVER CREEK VALLEY ROAD<br>San Jose, CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 492-8674 |
| DECIMAL                        | ANGULAR     |  |
| XX±                            | ±           |  |
| XXX±                           |             |  |
| XXXX±                          |             |  |
| TITLE                          |             | CMG8 Package Outline Drawing<br>2.0 x 2.0 x 0.5 mm Body<br>0.5mm Pitch DFN   |
| SIZE                           | DRAWING No. | REV  |
| C                              | PSC-4490    | 01   |
| DO NOT SCALE DRAWING           |             | SHEET 2 OF 2   |

| REVISIONS    |     |  |        |
|--------------|-----|--|--------|
| DATE CREATED | REV | DESCRIPTION                                    | AUTHOR |
| 4/3/14       | 00  | INITIAL RELEASE                                | JH     |
| 12/11/14     | 01  | ADD PIN1 CHAMFER                               | JH     |
| 4/5/18       | 02  | CHANGE QFN TO VFQFPN, RECALCULATE LAND PATTERN | RC     |


NOE: REFER TO DCP FOR OFFICIAL RELEASE DATE

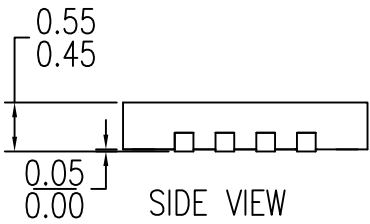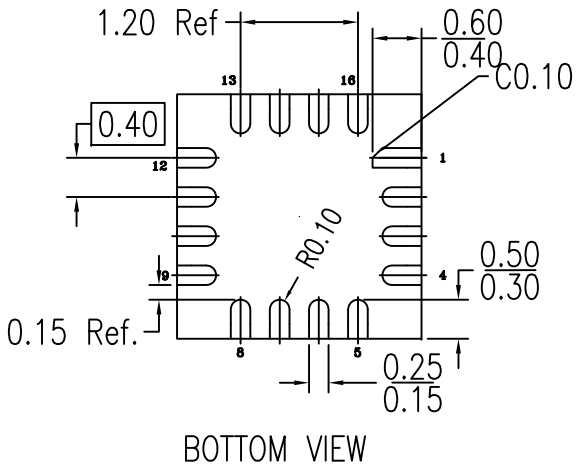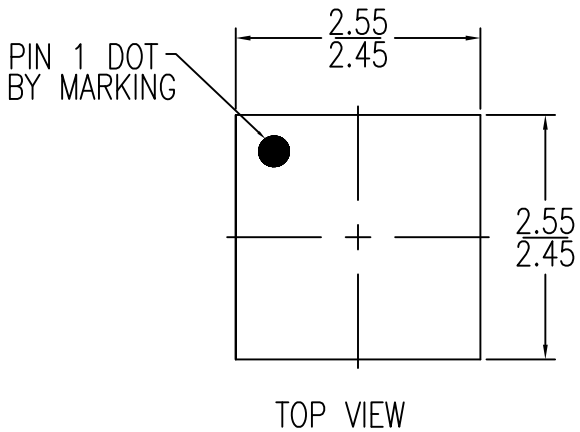

- NOTES:
1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
  2. ALL DIMENSIONS ARE IN MILLIMETERS.

|  |                |  |  |  |
|--|----------------|--|--|--|
| TOLERANCES<br>UNLESS SPECIFIED<br>DECIMAL<br>X±<br>XX±<br>XXX± | ANGULAR<br>±1° |  <b>IDT™</b><br>www.IDT.com | 6024 Silver Creek Valley Road<br>San Jose CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 284-8591 |  |
|  |                |  | TITLE CMG16 Package Outline Drawing<br>2.5 x 2.5 x 0.5 mm Body<br>0.40mm Pitch VFQFPN              |  |
| DRAWN  | SIZE           | DRAWING No.  | REV  |  |
|  | C              | PSC-4478   | 02   |  |
| DO NOT SCALE DRAWING   |                |  | SHEET 1 OF 2   |  |


| REVISIONS                                   |     |  |        |
|---|-----|--|--------|
| DATE CREATED                                | REV | DESCRIPTION                                    | AUTHOR |
| 4/3/14                                      | 00  | INITIAL RELEASE                                | JH     |
| 12/11/14                                    | 01  | ADD PIN1 CHAMFER                               | JH     |
| 4/5/18                                      | 02  | CHANGE QFN TO VFQFPN, RECALCULATE LAND PATTERN | RC     |
| NOE: REFER TO DCP FOR OFFICIAL RELEASE DATE |     |  |        |



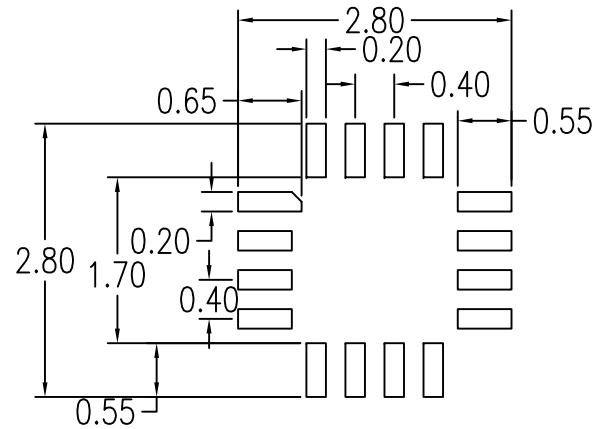


RECOMMENDED LAND PATTERN DIMENSION

NOTES:

1. ALL DIMENSIONS ARE IN MM. ANGLES IN DEGREES.
2. TOP DOWN VIEW AS VIEWED ON PCB.
3. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

|                             |             |   |
|-----------------------------|-------------|---|
| TOLERANCES UNLESS SPECIFIED |             |  <b>IDT™</b> 6024 Silver Creek Valley Road<br>San Jose CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 284-8591<br>www.IDT.com |
| DECIMAL                     | ANGULAR     |   |
| X±                          | ±1°         |   |
| XX±                         |             |   |
| XXX±                        |             |   |
| DRAWN                       |             | TITLE CMG16 Package Outline Drawing<br>2.5 x 2.5 x 0.5 mm Body<br>0.40mm Pitch VFQFPN   |
| SIZE                        | DRAWING No. | REV   |
| C                           | PSC-4478    | 02  |
| DO NOT SCALE DRAWING        |             | SHEET 2 OF 2  |

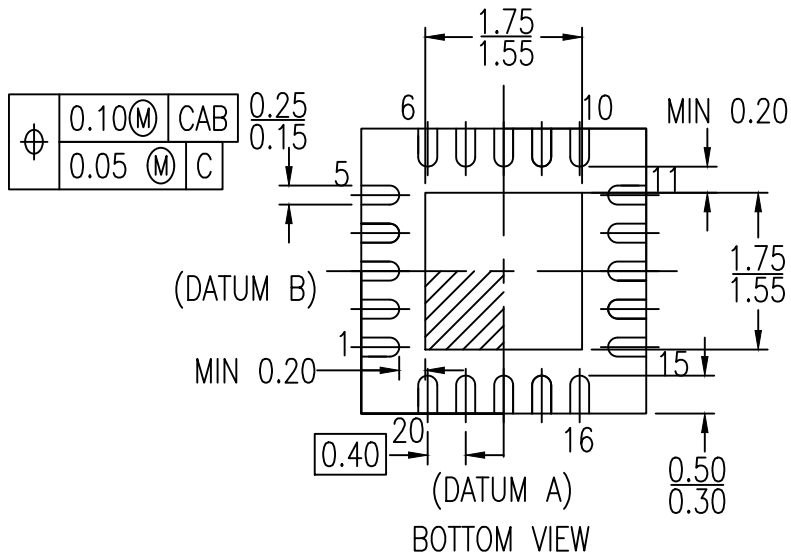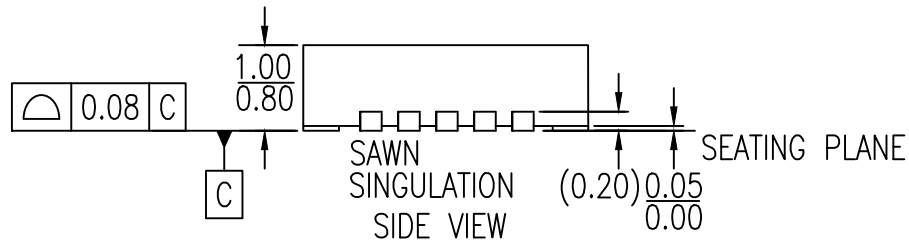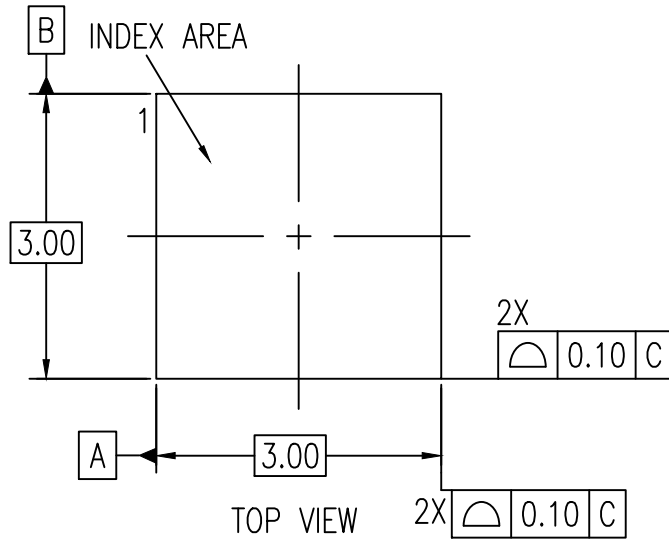

**NOTE:**

1. ALL DIMENSIONS ARE IN MM.
2. ALL DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2009
3. PIN 1 LOCATION IDENTIFIER IS EITHER BY CHAMFER OR NOTCH



RECOMMENDED LAND PATTERN DIMENSION


NOTES:

1. ALL DIMENSIONS ARE IN MM. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED ON PCB.
3. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.


| Package Revision History |         |                      |
|--------------------------|---------|----------------------|
| Date Created             | Rev No. | Description          |
| Sept 13, 2018            | Rev 01  | Change QFN to VFQFPN |
| Mar 30, 2016             | Rev 00  | Initial Release      |




TOP VIEW

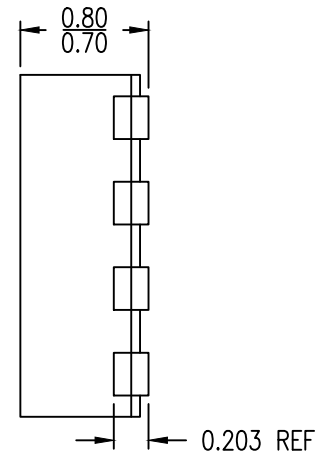

SIDE VIEW

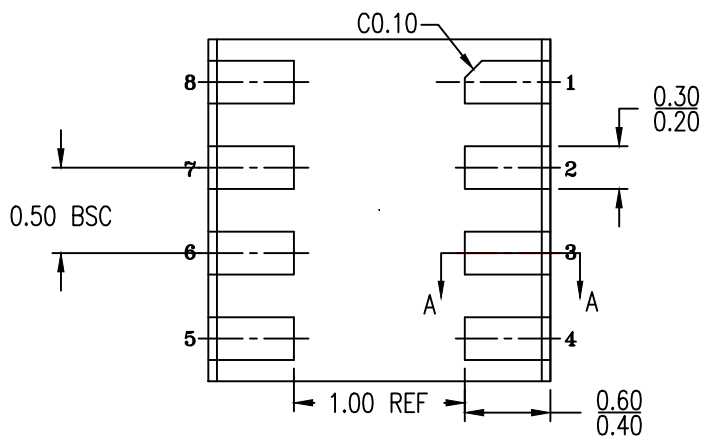


BOTTOM VIEW

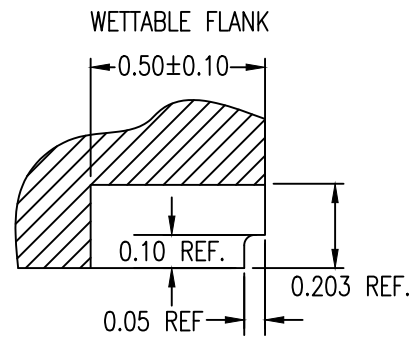

A-A CROSS SECTION

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. ALL DIMENSIONS ARE IN MILLIMETERS

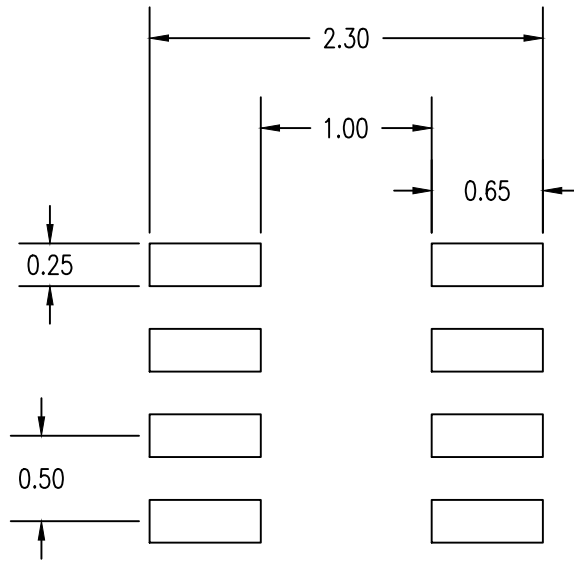

RECOMMENDED LAND PATTERN DIMENSION

NOTES:

1. ALL DIMENSION ARE IN MM. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED.
3. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR MOUNT DESIGN AND LAND PATTERN.

| Package Revision History |         |                 |
|--------------------------|---------|-----------------|
| Date Created             | Rev No. | Description     |
|                          |         |                 |
| Oct 23, 2018             | Rev 00  | Initial Release |