


Force Guided Relay SR4 D/M

- 4 pole relay with force guided contacts according to EN 61810-3 (formerly EN50205)
- Compact design and space efficient

Typical applications

Emergency shut-off, press control, machine control, elevator and escalator control, safety relays

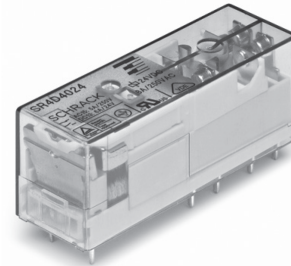

F0244-C



Approvals
VDE Cert. No. 40005334, UL E214025, TUV 968/EL 230, CCC 2020970303000303
Technical data of approved types on request

Contact Data



| | |
|---|--|
| Contact arrangement | 3 form A + 1 form B contacts 3 NO + 1 NC 2 form A + 2 form B contacts 2 NO + 2 NC |
| Rated voltage | 250VAC |
| Max. switching voltage | 400VAC |
| Rated current | 8A |
| Contact material | AgSnO ₂ |
| Contact style | single contact, force guided type A according to EN61810-3 (formerly EN50205) |
| Min. recommended contact load | 5V/10mA |
| Initial contact resistance | ≤100mΩ at 1A, 24VDC ≤20Ω at 10mA, 5VDC |
| Frequency of operation, with/without load | 6/150min ⁻¹ |

Contact ratings

| Type | Contact | Load | Cycles |
|--------------------|---------------------|-----------------------------------|--------------------|
| IEC 61810 | | | |
| SR4 | 1xA (NO) | 8A, 250VAC, cosφ=1, 70°C | 20x10 ³ |
| SR4 | 1xB (NC) | 5A, 250VAC, cosφ=1, 70°C | 20x10 ³ |
| UL 508 | | | |
| SR4 | A/B (NO/NC) | 8A, 250VAC, general purpose, 70°C | 6.000 |
| SR4 | 1xA (1xNO) | R300, B300 | 6.000 |
| SR4 | 1xB (1xNC) | R300 | 6.000 |
| EN60947-5-1 | | | |
| SR4 | 1xA/1xB (1xNO/1xNC) | 3A, 24VDC, DC13 | 6.050 |
| SR4 | 1xA (1xNO) | 3A, 250VAC AC-15 | 6.050 |

More ratings and information see product specification 2158002

Mechanical endurance 10x10⁶ operations

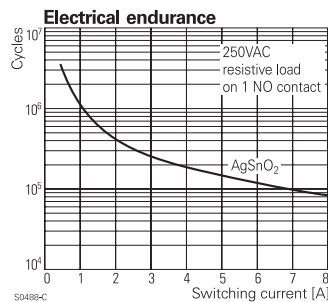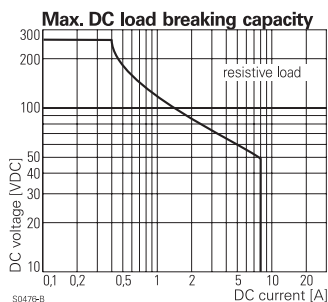


Coil data
Coil voltage range 5 to 110VDC

Coil versions, DC-coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% | Rated power mW |
|-----------|-------------------|---------------------|---------------------|-----------------------|----------------|
| 005 | 5 | 3.8 | 0.5 | 31 | 806 |
| 006 | 6 | 4.5 | 0.6 | 45 | 800 |
| 009 | 9 | 6.8 | 0.9 | 101 | 802 |
| 012 | 12 | 9.0 | 1.2 | 180 | 800 |
| 015 | 15 | 11.3 | 1.5 | 281 | 801 |
| 018 | 18 | 13.5 | 1.8 | 405 | 800 |
| 021 | 21 | 16.0 | 2.1 | 551 | 800 |
| 024 | 24 | 18.0 | 2.4 | 720 | 800 |
| 036 | 36 | 27.0 | 3.6 | 1620 | 800 |
| 040 | 40 | 30.0 | 4.0 | 2000 | 800 |
| 048 | 48 | 36.0 | 4.8 | 2880 | 800 |
| 060 | 60 | 45.0 | 6.0 | 4500 | 800 |
| 085 | 85 | 63.8 | 8.5 | 9031 | 800 |
| 110 | 110 | 83.0 | 11.0 | 15125 | 800 |

All figures are given for coil without pre-energization, at ambient temperature +23°C.

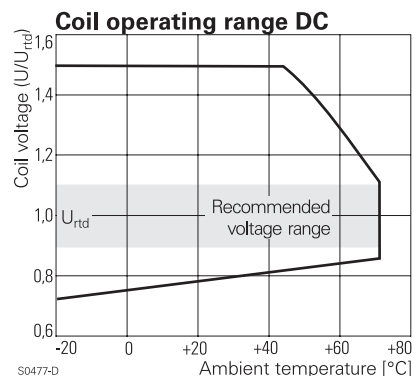

Force Guided Relay SR4 D/M (Continued)

Insulation Data


| | |
|--|--------------------|
| Initial dielectric strength | |
| between open contacts | 1500Vrms |
| between contact and coil | 4000Vrms |
| between adjacent contacts | 2500Vrms |
| Clearance/creepage | |
| between open contacts | microdisconnection |
| between contact and coil | ≥10/10mm |
| between adjacent contacts | ≥3/3.5mm |
| Insulation to EN 50178, type of insulation | |
| between contact and coil | reinforced |
| between adjacent contacts | basic |

Other Data

| | |
|---|--------------|
| Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter | |
| Ambient temperature | -25 to 70°C |
| Category of environmental Protection | |
| IEC 61 810 | RTIII |
| Weight | 30g |
| Resistance to soldering heat THT | |
| IEC 60068-2-20 | 260°C/5s |
| Packaging/unit | tube/10 pcs. |

For more detailed information see product specification 2158002


Dimensions

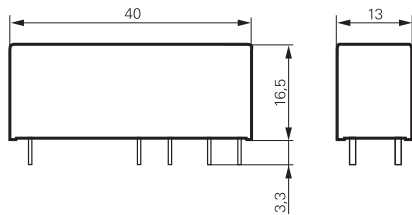

S0412-BH


PCB layout / terminal assignment

Bottom view on solder pins




S0413-BC

2 form A + 2 form B, 2 NO + 2 NC contacts



S0413-BB

3 form A + 1 form B, 3 NO + 1 NC contacts



S0413-BA

Product code structure

Typical product code **SR4 D 4 012**

| | |
|----------------------------|--|
| Type | SR4 Relay with force guided contacts SR4 |
| Contact arrangement | D 2 form A + 2 form B contacts (2 NO + 2 NC) M 3 form A + 1 form B contacts (3 NO + 1 NC) |
| Contact material | 4 AgSnO ₂ |
| Coil | Coil code: please refer to coil versions table (e.g. 012=12VDC) Other types on request |