


SB[®] Connectors

350 amp Series Connectors 2-Pole

Catalog Number	Description	Housing Color	Wire AWG	Cable Well Diameter		Cable Size sq. mm
				in.	mm	
6320G1	Housing with springs & 2 contacts	Gray	2/0	.48	12.3	67.4
6320G5			3/0	.58	14.7	85.0
6320G2			4/0	.64	16.3	107.2
6320G4			300MCM	.77	19.4	152.0
6321G1		Blue	2/0	.48	12.3	67.4
6321G5			3/0	.58	14.7	85.0
6321G2			4/0	.64	16.3	107.2
6321G4			300 MCM	.77	19.4	152.0
6322G1		Red	2/0	.48	12.3	67.4
6322G5			3/0	.58	14.7	85.0
6322G2			4/0	.64	16.3	107.2
6322G4			300 MCM	.77	19.4	152.0
6323G1		Yellow	2/0	.48	12.3	67.4
6323G5			3/0	.58	14.7	85.0
6323G2			4/0	.64	16.3	107.2
6323G4			300 MCM	.77	19.4	152.0
6324G1		Green	2/0	.48	12.3	67.4
6324G5			3/0	.58	14.7	85.0
6324G2			4/0	.64	16.3	107.2
6324G4			300 MCM	.77	19.4	152.0
6400G1		Orange	2/0	.48	12.3	67.4
6400G5			3/0	.58	14.7	85.0
6400G2			4/0	.64	16.3	107.2
6400G4			300 MCM	.77	19.4	152.0

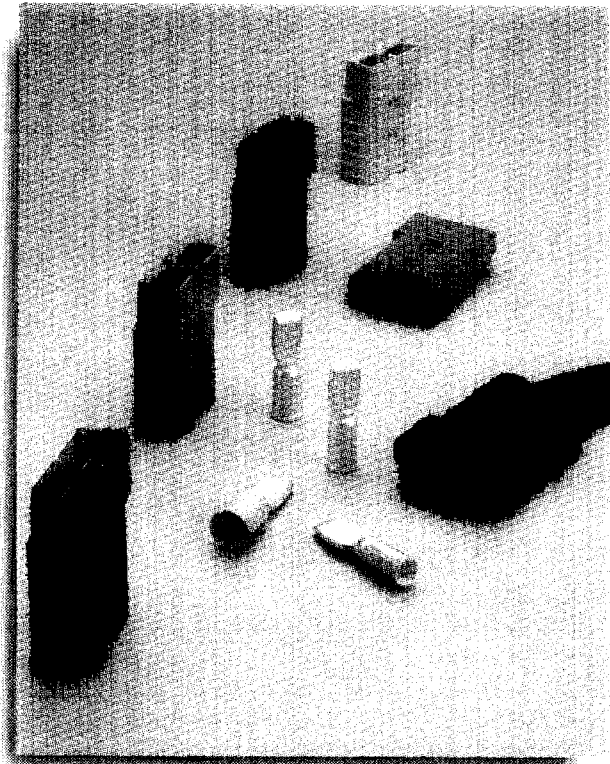

350 amp Housings

Catalog Number	Description	Housing Color
906	Housings with springs	Gray
912		Blue
913		Red
914		Yellow
931		Green
932		Orange

350 amp Housings - 94VO

Catalog Number	Description	Housing Color
SB350GRA	Housing with springs	Gray
SB350BLU		Blue
SB350ORN		Orange
SB350YEL		Yellow
SB350RED		Red

350 amp Contacts

Catalog Number	Description	Wire AWG	Cable Well Diameter		Cable Size sq. mm
			in.	mm	
907	Contact Set: 2 contacts	2/0	.48	12.3	67.4
916		3/0	.58	14.7	85.0
908		4/0	.64	16.3	107.2
910		300 MCM	.77	19.4	152.0

* Cable clamps are necessary for solder connections to unsupported leads (required by UL). See Cable Clamps.

Reducing bushings should be used to crimp smaller wire sizes. See Reducing Bushings.