


# SB<sup>®</sup> Connectors

## 350 amp Series Connectors 2-Pole

Catalog Number	Description	Housing Color	Wire AWG	Cable Well Diameter		Cable Size sq. mm
				in.	mm	
6320G1	Housing with springs & 2 contacts	Gray	2/0	.48	12.3	67.4
6320G5			3/0	.58	14.7	85.0
6320G2			4/0	.64	16.3	107.2
6320G4			300MCM	.77	19.4	152.0
6321G1		Blue	2/0	.48	12.3	67.4
6321G5			3/0	.58	14.7	85.0
6321G2			4/0	.64	16.3	107.2
6321G4			300 MCM	.77	19.4	152.0
6322G1		Red	2/0	.48	12.3	67.4
6322G5			3/0	.58	14.7	85.0
6322G2			4/0	.64	16.3	107.2
6322G4			300 MCM	.77	19.4	152.0
6323G1		Yellow	2/0	.48	12.3	67.4
6323G5			3/0	.58	14.7	85.0
6323G2			4/0	.64	16.3	107.2
6323G4			300 MCM	.77	19.4	152.0
6324G1		Green	2/0	.48	12.3	67.4
6324G5			3/0	.58	14.7	85.0
6324G2			4/0	.64	16.3	107.2
6324G4			300 MCM	.77	19.4	152.0
6400G1		Orange	2/0	.48	12.3	67.4
6400G5			3/0	.58	14.7	85.0
6400G2			4/0	.64	16.3	107.2
6400G4			300 MCM	.77	19.4	152.0

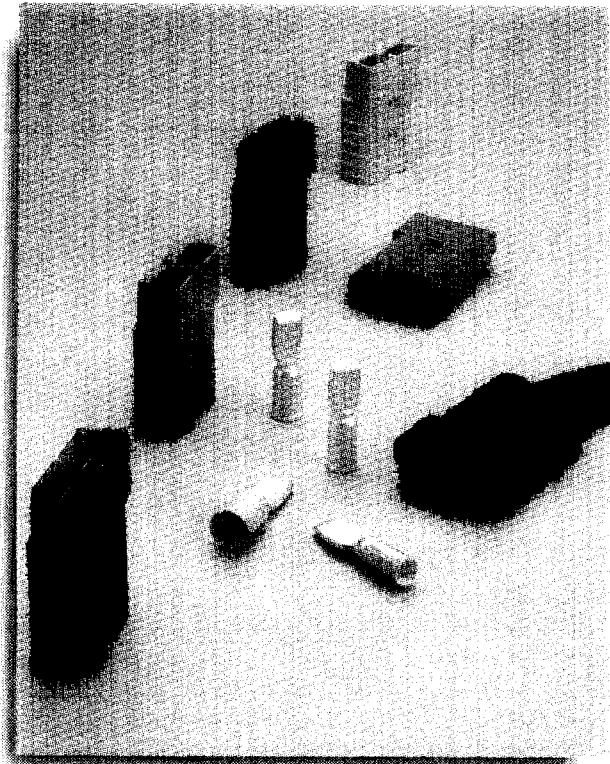

## 350 amp Housings

Catalog Number	Description	Housing Color
906	Housings with springs	Gray
912		Blue
913		Red
914		Yellow
931		Green
932		Orange

## 350 amp Housings - 94VO

Catalog Number	Description	Housing Color
SB350GRA	Housing with springs	Gray
SB350BLU		Blue
SB350ORN		Orange
SB350YEL		Yellow
SB350RED		Red

## 350 amp Contacts

Catalog Number	Description	Wire AWG	Cable Well Diameter		Cable Size sq. mm
			in.	mm	
907	Contact Set: 2 contacts	2/0	.48	12.3	67.4
916		3/0	.58	14.7	85.0
908		4/0	.64	16.3	107.2
910		300 MCM	.77	19.4	152.0

\* Cable clamps are necessary for solder connections to unsupported leads (required by UL). See Cable Clamps.

Reducing bushings should be used to crimp smaller wire sizes. See Reducing Bushings.