

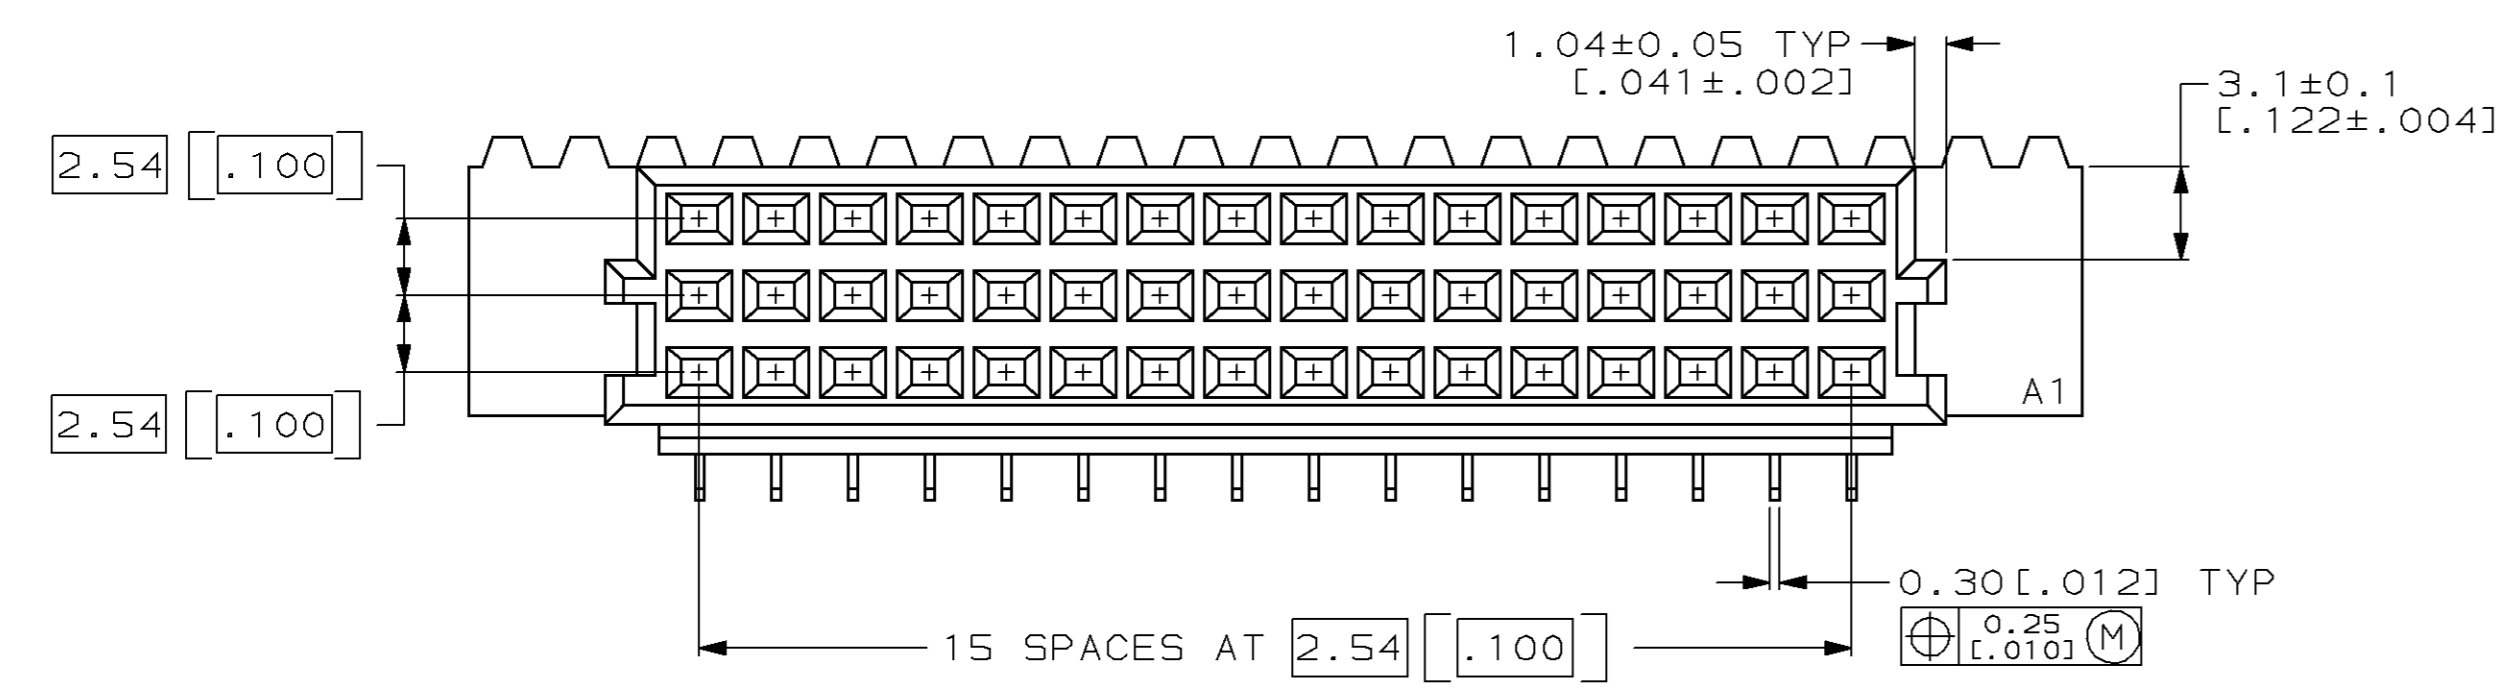
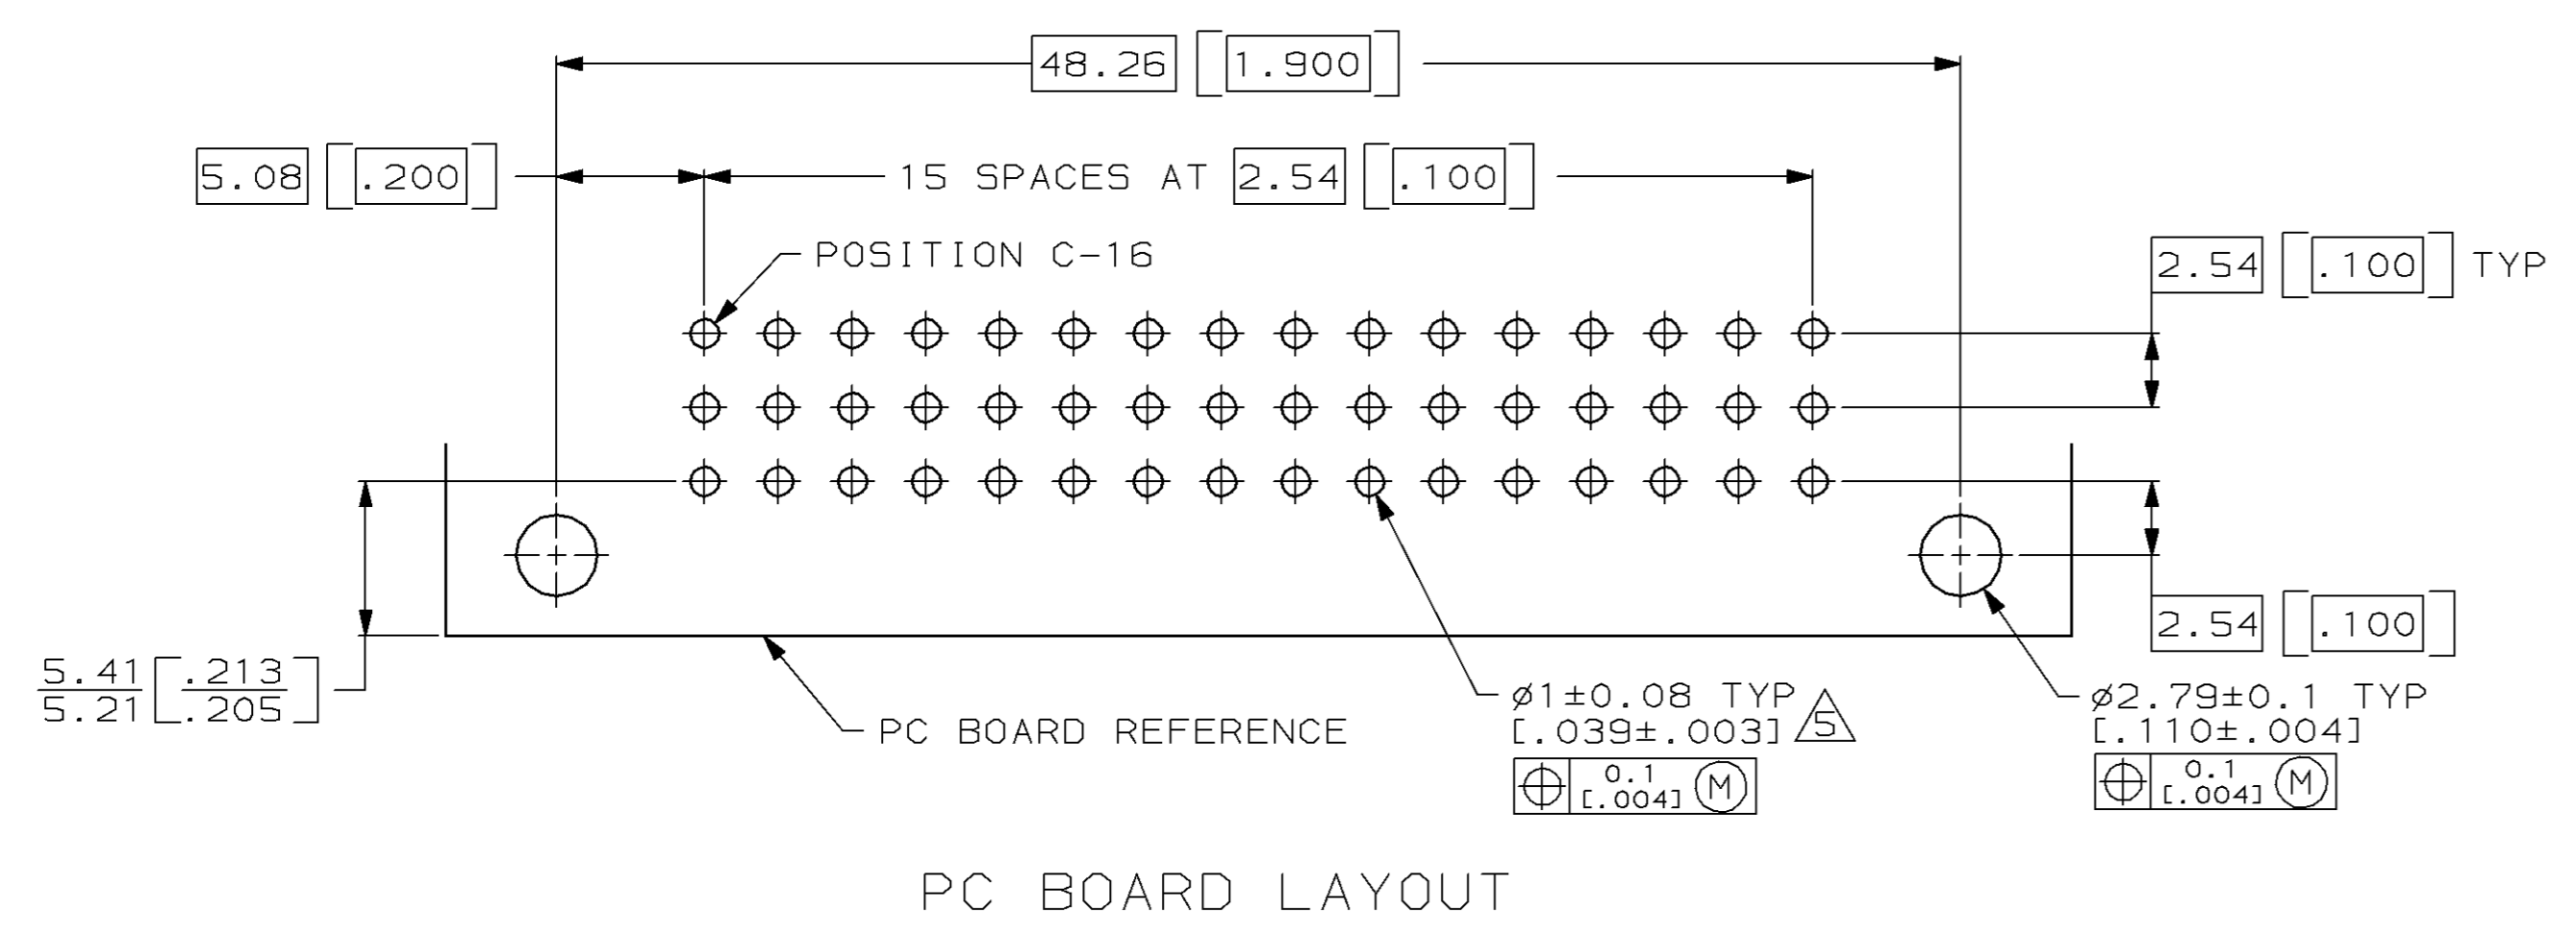
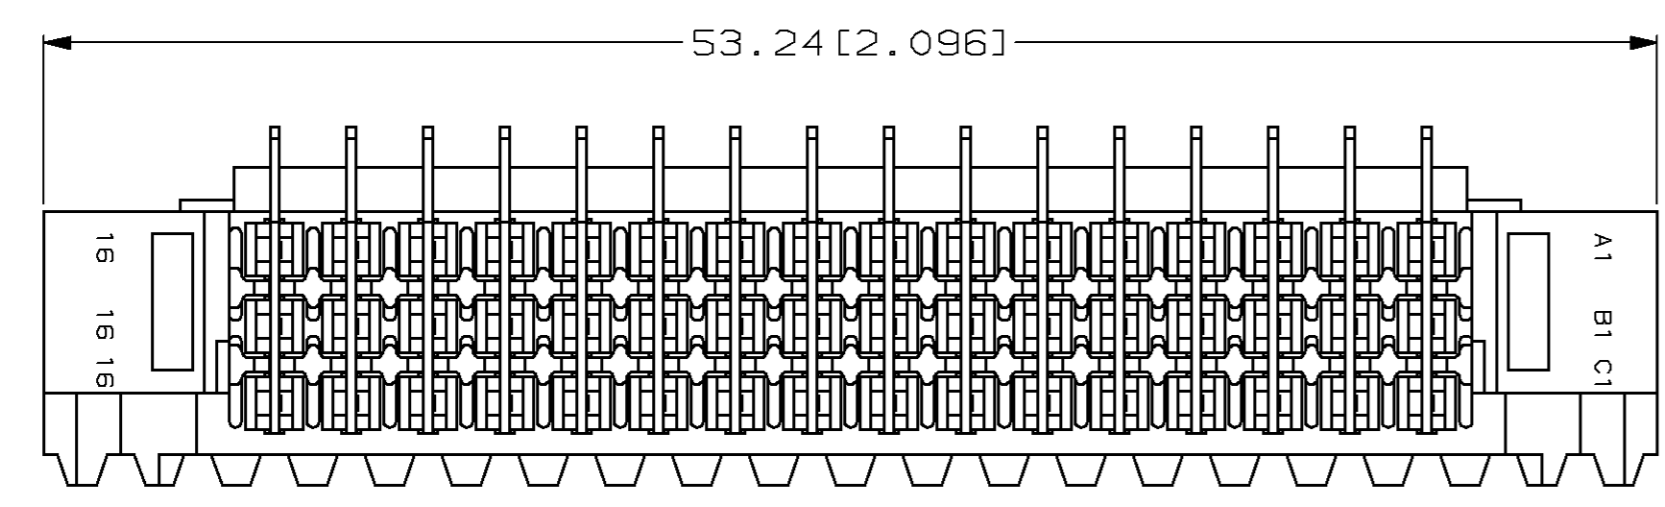
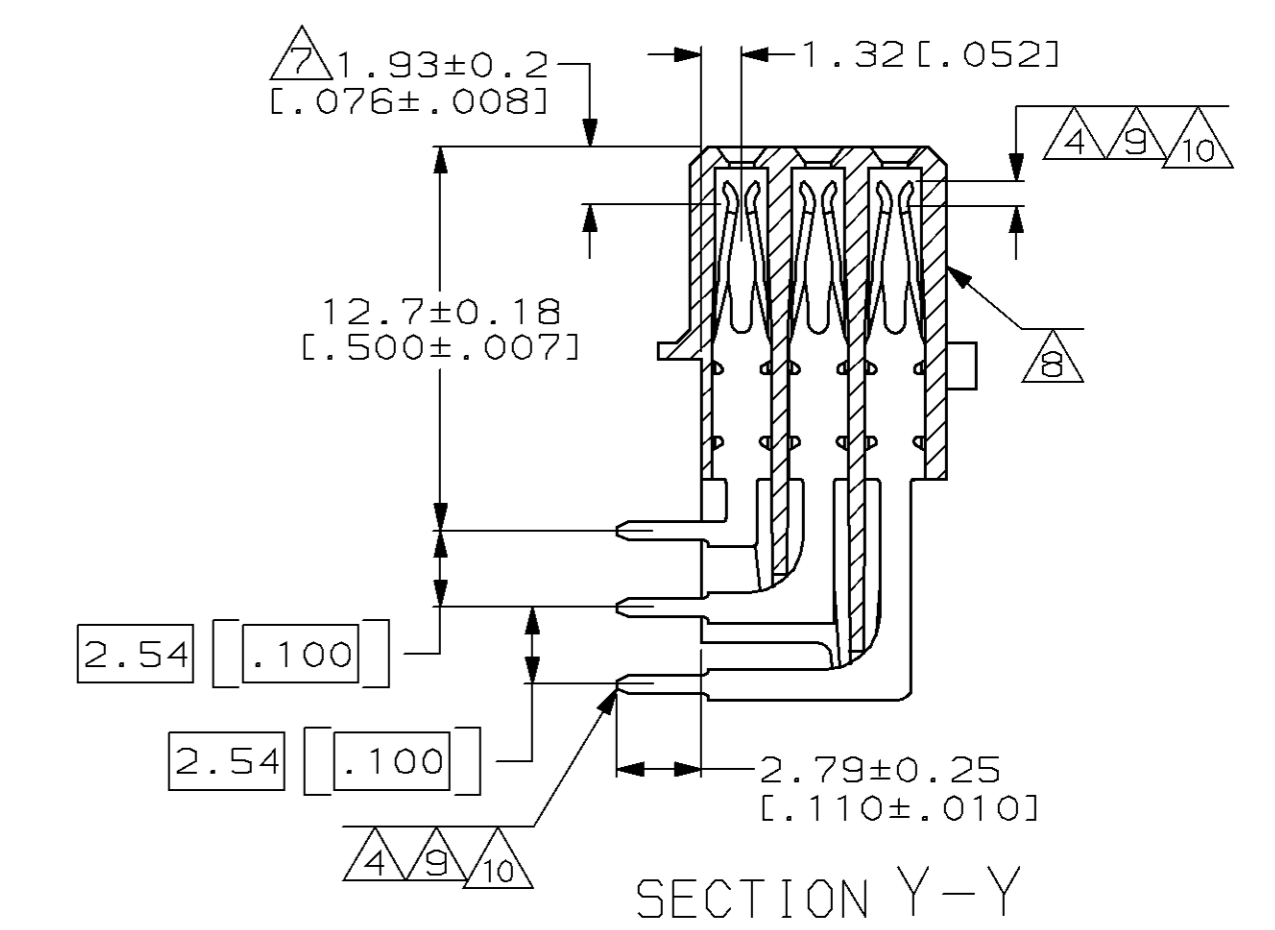


| LOC | | DIST | | P | | F | | ZONE | | LTR | | REVISIONS | | |
|-----|----|------|--|---|--|---|--|------|--|-----|---|-----------------|---------|------|
| AD | 25 | | | | | | | | | | | DESCRIPTION | DATE | APPD |
| | | | | | | | | | | | J | EC 0010-0318-96 | 4/1/96 | CR |
| | | | | | | | | | | | K | EC 0010-1469-95 | 4/1/96 | CR |
| | | | | | | | | | | | L | EC 0010-0895-96 | 6/24/96 | CR |

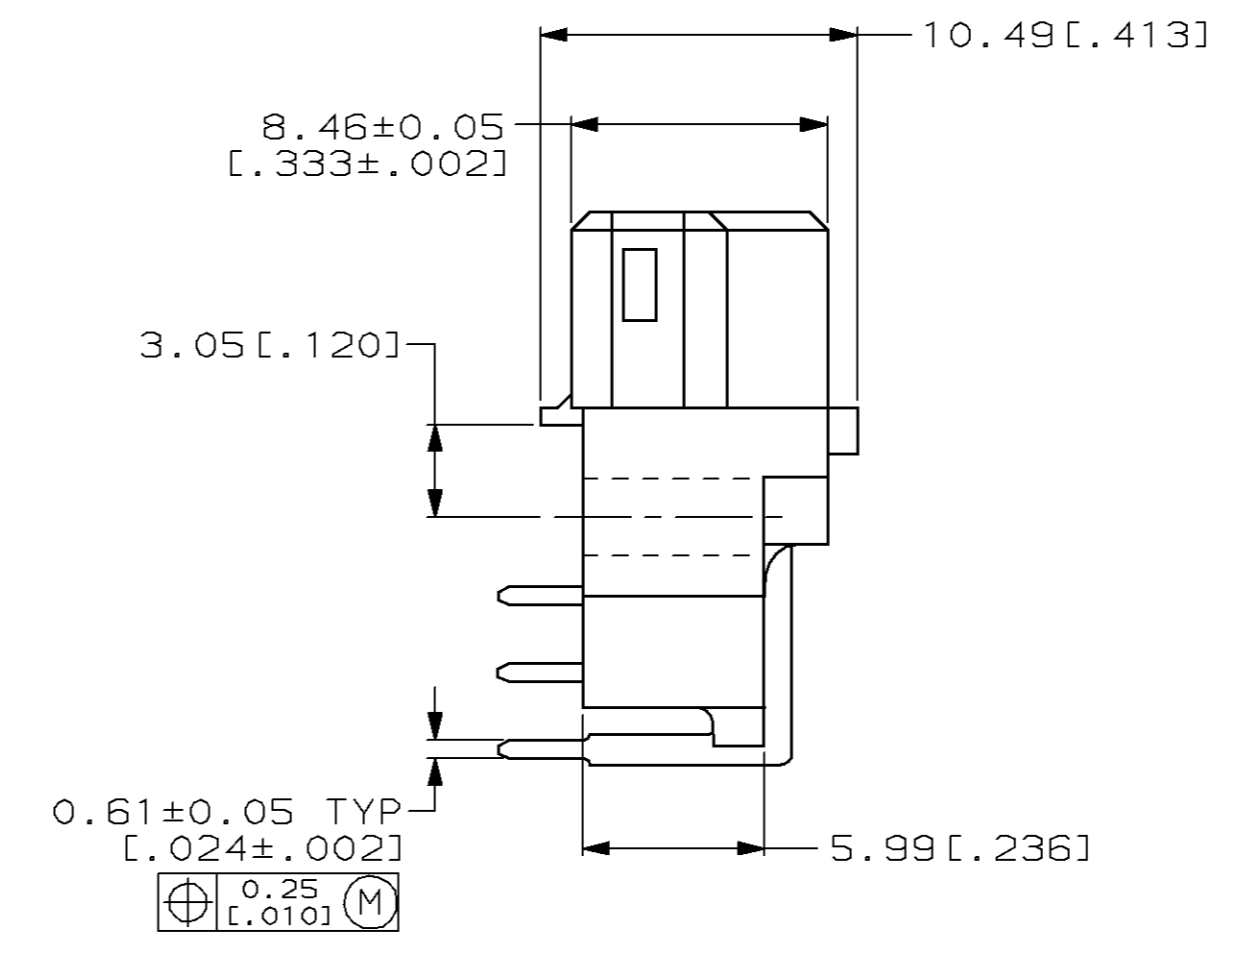

1. DIMENSIONS IN BRACKETS ARE IN INCHES.
2. HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
3. CONTACT MATERIAL: PHOSPHOR BRONZE.
4. CONTACT FINISH: 0.00076[.000030] GOLD IN CONTACT AREA. 0.00127[.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON POSTS.
5. RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
6. PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO HOT-STAMPED THIS APPROXIMATE AREA.
7. CONTACT POINT.
8. HOT-STAMPING ON THIS SIDE.
9. CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. TIN-LEAD ON POSTS.
10. CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD ON POSTS.

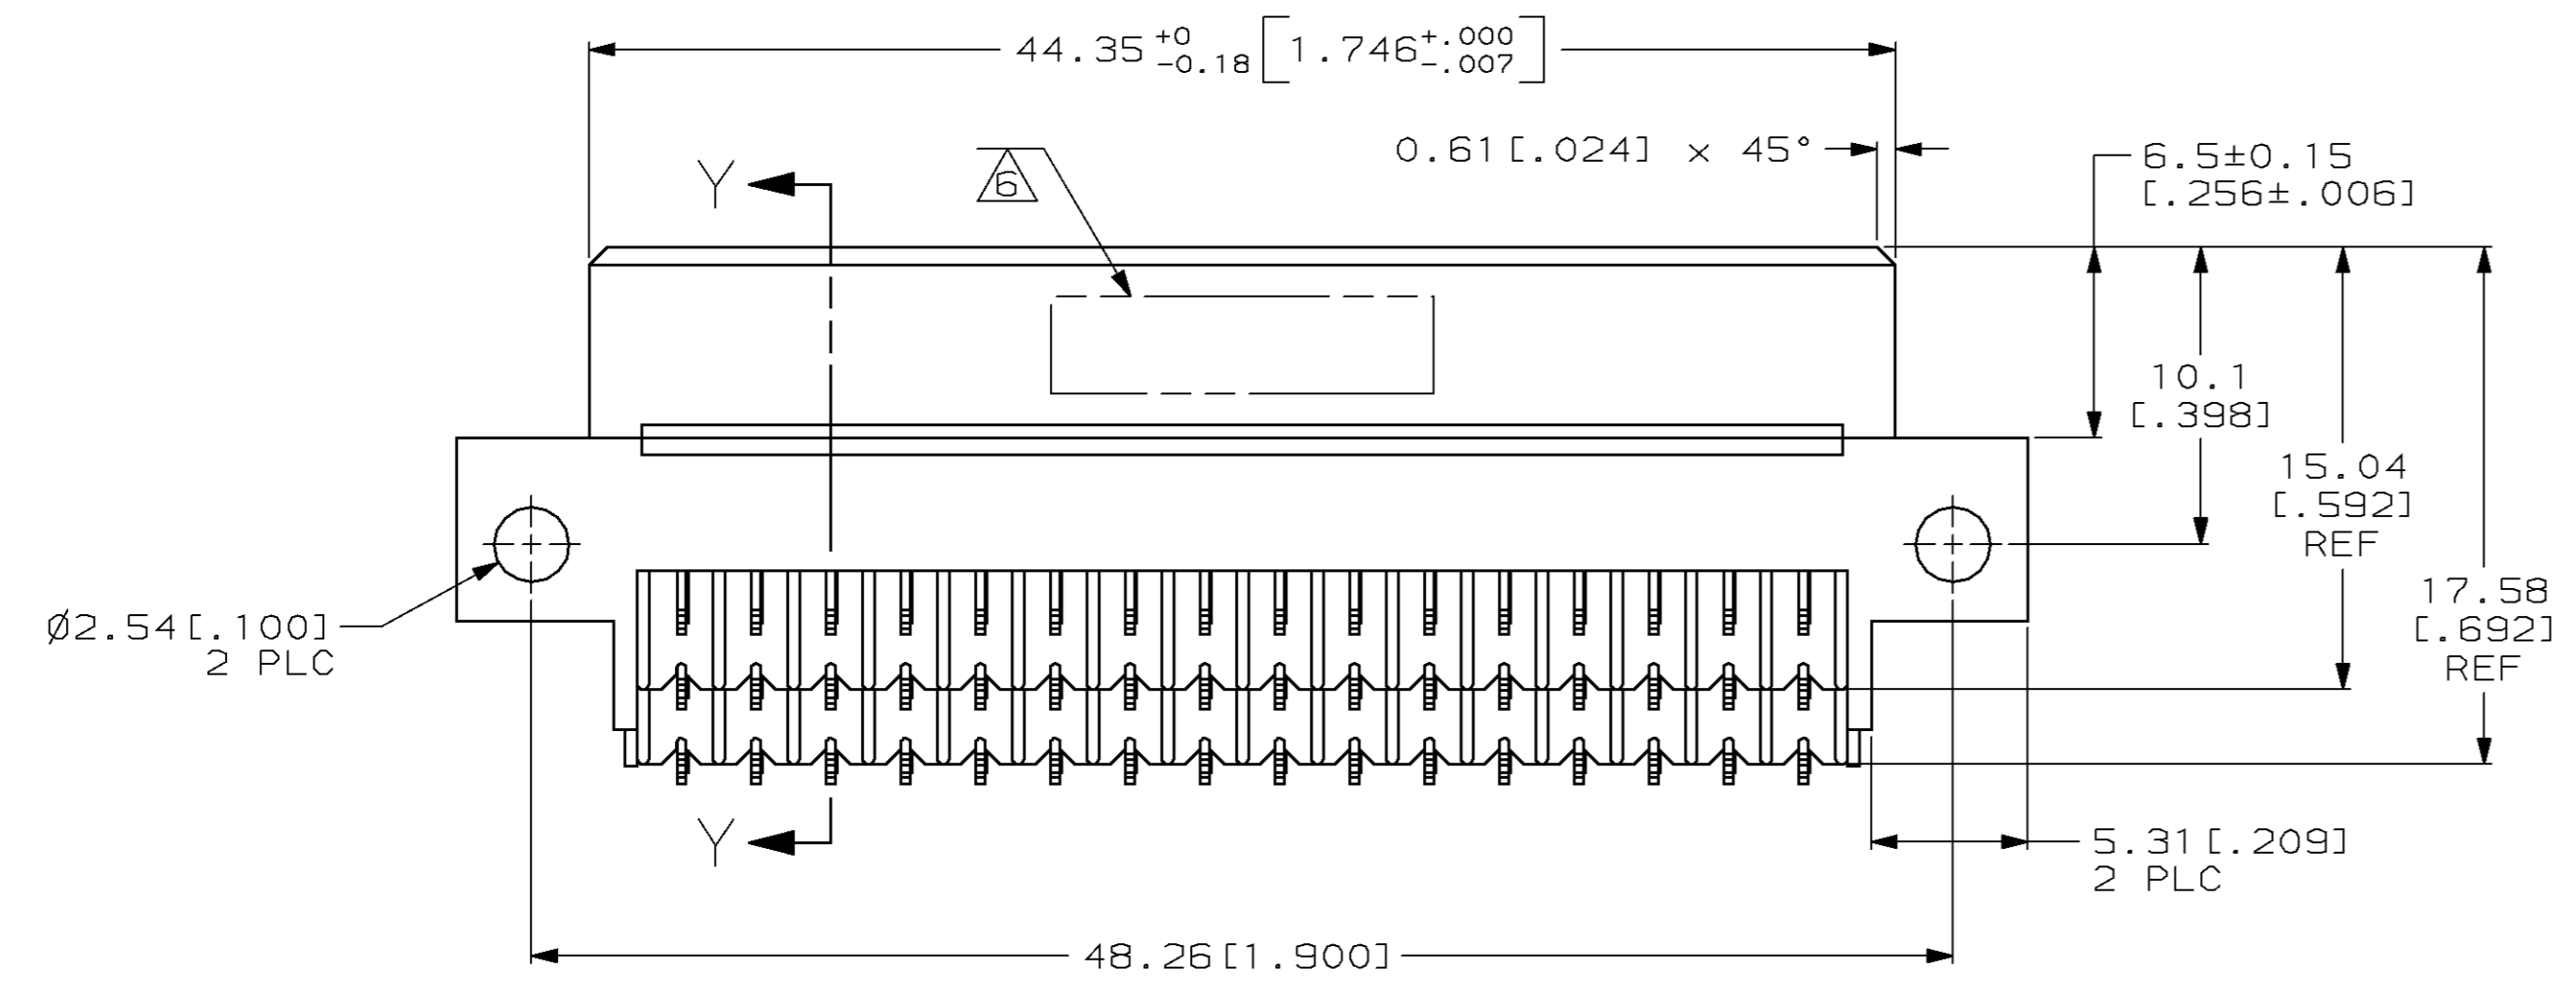

| NOTES | POSITIONS LOADED | C | B | A | NO. OF LOADED POSITION | ASSY PART NUMBER |
|-------|------------------|---|---|---|------------------------|------------------|
| 9 | 1 THRU 16 | X | X | X | 48 | 650868-9 |
| 10 | 1 THRU 16 | X | X | X | 48 | 650868-5 |
| 4 | 1 THRU 16 | X | X | X | 48 | 650868-4 |

| | | |
|---|---------------------------|--|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: | DR L. BRINER 7/25/90 | AMP INCORPORATED Harrisburg, Pa. 17105 |
| 1 PLC DEC ± - | CHK N. DRASHER 12/19/91 | |
| 2 PLC DEC ± 0.13[.005] | APPD N. DRASHER 12/19/91 | RECEPTACLE ASSEMBLY, EUROCARD, TYPE 1/2R, 48 POSITION |
| ANGLES ± - | APPD K.R. PARMER 12/19/91 | |
| MATERIAL | PRODUCT SPEC | SIZE D 00779 |
| HOUSING: 2 | APPLICATION SPEC | CAGE CODE 00779 |
| CONTACT: 3 | FINISH | DRAWING NO 650868 |
| CONTACT: 4, 9, 10 | WEIGHT | SCALE 4:1 |
| | | SHEET 1 OF 1 |