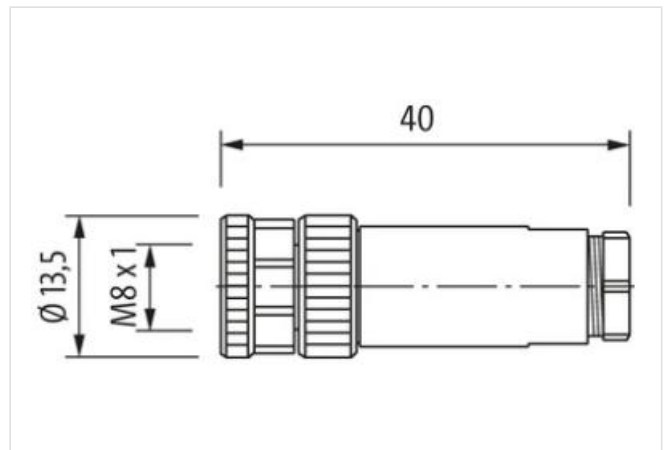
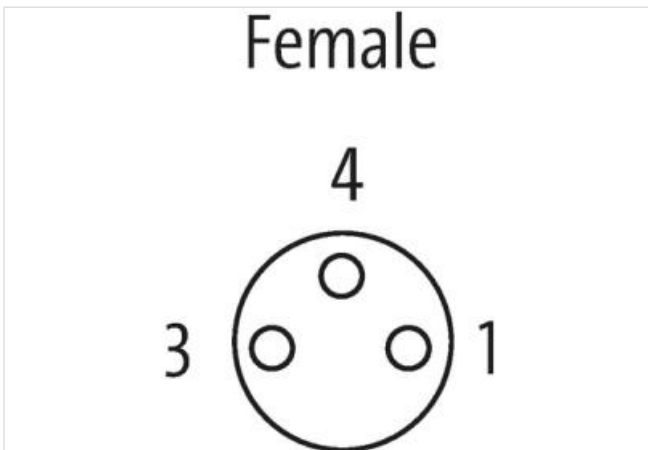
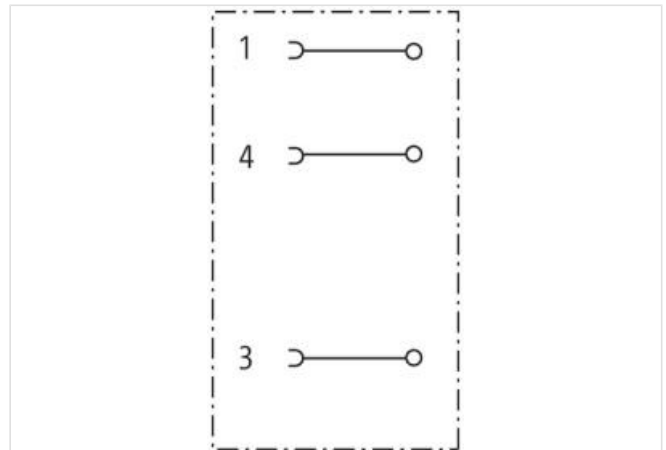


**M8 female 0° A-cod. screw terminal**3-pol., 0,14 - 0.5mm<sup>2</sup>, 2,5 - 5mm

Female straight

M8, 3-pole

Screw terminal

Connection cross section: 0.14...0.5 mm<sup>2</sup>[Link to Product](#)**Illustration**

Product may differ from Image

**classifications**

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440102
ECLASS-11.1	27440102

ECLASS-12.0	27440116
ETIM-5.0	EC002635

#### Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating current per contact	max. 4 A
No. of poles	3-pole
Material group	III
Coding	A-coded
Connection	Screw terminal
Connection cross section	0.14...0.5 mm <sup>2</sup>
Sealing range (cable Ø)	2.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Compression gland	M8 (AF12,5)
Isolation resistance	> 100 MOhm
Over voltage category	II

#### General data

Material contact	Brass, gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material housing	PA
Dimensions H×W×D	40×13,5×13,5 mm

#### Commercial data

customs tariff number	85366990
GTIN	4048879224512
Packaging unit	1