



## MODEL 44032

### Precision Epoxy NTC Thermistor

- 30,000 ohm Resistance @ 25°C
- Interchangeable  $\pm 0.1^{\circ}\text{C}$ , 0°C to 70°C
- Pressed Disk Ceramic Sensor
- High sensitivity
- Thermally conductive epoxy coating
- 0.095" (2.4 mm) Maximum Diameter
- 32 AWG, 3" (7.6 cm) long Silver plated copper leads
- RoHS Compliant

#### FEATURES

- 30,000 Ohm Resistance @ 25°C
- Interchangeability
- Good Long Term Stability
- High Sensitivity
- Thermally Conductive Epoxy Coating
- RoHS Compliance

#### APPLICATIONS

- High-range Temperature Applications
- Tight Tolerance Instrumentation
- General Applications Requiring Stability
- Applications Requiring Sensing Small Changes in Temperature
- Non-condensing Moisture Environments
- Allows use in Applications World-wide


## MODEL 44032

Precision Epoxy NTC Thermistor

### PERFORMANCE SPECS

Parameter	Units	Value
Resistance @ 25°C	Ohms	30,000
Tolerance 0°C to 70°C	°C	± 0.1
Beta Value 25/85	K	3943
Tolerance on Beta Value	%	0.4
Time response in air	Seconds	< 10
Dissipation Constant in air	mW/°C	1
Insulation Resistance (Min. of 100 Mohms for 1 sec.)	Volts	500

### MECHANICAL DETAILS

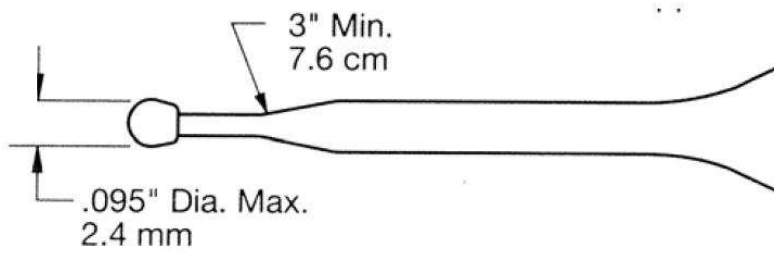

**TYPICAL PERFORMANCE CURVES (RESISTANCE OF INDIVIDUAL THERMISTORS)**

Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms
-40	884.6	0	94.98	40	16.15	80	3.843	120	1.176
-39	830.9	1	90.41	41	15.52	81	3.720	121	1.145
-38	780.8	2	86.09	42	14.92	82	3.602	122	1.114
-37	733.9	3	81.99	43	14.35	83	3.489	123	1.085
-36	690.2	4	78.11	44	13.80	84	3.379	124	1.057
-35	649.3	5	74.44	45	13.28	85	3.273	125	1.029
-34	611.0	6	70.96	46	12.77	86	3.172	126	1.002
-33	575.2	7	67.66	47	12.29	87	3.073	127	0.9763
-32	541.7	8	64.53	48	11.83	88	2.979	128	0.9511
-31	510.4	9	61.56	49	11.39	89	2.887	129	0.9267
-30	481.0	10	58.75	50	10.97	90	2.799	130	0.9030
-29	453.5	11	56.07	51	10.57	91	2.714	131	0.8800
-28	427.7	12	53.54	52	10.18	92	2.632	132	0.8577
-27	403.5	13	51.13	53	9.807	93	2.552	133	0.8361
-26	380.9	14	48.84	54	9.450	94	2.476	134	0.8150
-25	359.6	15	46.67	55	9.109	95	2.402	135	0.7946
-24	339.6	16	44.60	56	8.781	96	2.331	136	0.7748
-23	320.9	17	42.64	57	8.467	97	2.262	137	0.7556
-22	303.3	18	40.77	58	8.166	98	2.195	138	0.7369
-21	286.7	19	38.99	59	7.876	99	2.131	139	0.7188
-20	271.2	20	37.30	60	7.599	100	2.069	140	0.7012
-19	256.5	21	35.70	61	7.332	101	2.009	141	0.6841
-18	242.8	22	34.17	62	7.076	102	1.950	142	0.6675
-17	229.8	23	32.71	63	6.830	103	1.894	143	0.6513
-16	217.6	24	31.32	64	6.594	104	1.840	144	0.6356
-15	206.2	25	30.00	65	6.367	105	1.788	145	0.6203
-14	195.4	26	28.74	66	6.149	106	1.737	146	0.6055
-13	185.2	27	27.54	67	5.940	107	1.688	147	0.5911
-12	175.6	28	26.40	68	5.738	108	1.640	148	0.5771
-11	166.6	29	25.31	69	5.545	109	1.594	149	0.5635
-10	158.0	30	24.27	70	5.359	110	1.550	150	0.5502
-9	150.0	31	23.28	71	5.180	111	1.507		
-8	142.4	32	22.33	72	5.007	112	1.465		
-7	135.2	33	21.43	73	4.842	113	1.425		
-6	128.5	34	20.57	74	4.682	114	1.386		
-5	122.1	35	19.74	75	4.529	115	1.348		
-4	116.0	36	18.96	76	4.381	116	1.311		
-3	110.3	37	18.21	77	4.239	117	1.276		
-2	104.9	38	17.49	78	4.102	118	1.241		
-1	99.80	39	16.80	79	3.970	119	1.208		