


# 3M™ Molded Assembly

.100" x .100"

1M Series

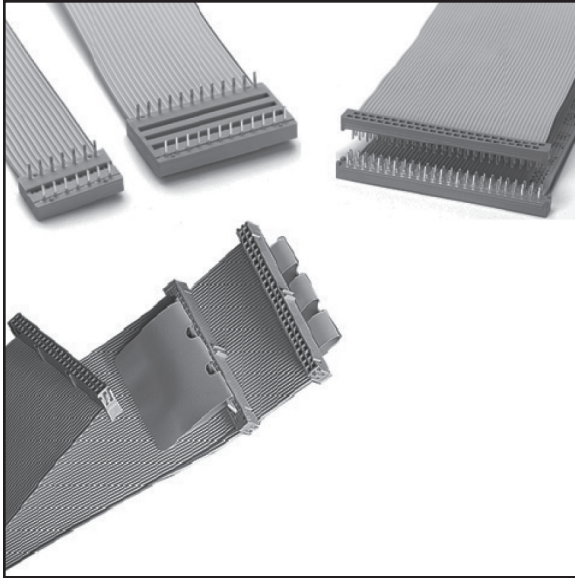

- Available in multiple sizes
- Sockets mate with standard .100" x .100" headers and plugs
- Molded-in strain relief
- Regulatory Information: Visit [3M.com/regs](http://3M.com/regs) or contact your 3M representative to find the RoHS compliance status of the 3M part you are interested in.

Date Modified: September 18, 2019

TS-2149-F  
Sheet 1 of 2

---

## Physical

### Connector:

Technical Specification: TS-0632 for .100" x .100" Molded-On Socket  
TS-2153 for .100" x .100" Molded-On PCB  
TS-2152 for .100" x .300" or .600" Molded-On DIP

### 26 AWG Cable:

Technical Specification: TS-0063 for .050" Flat Ribbon (stranded) Cable, Gray PVC  
TS-0122 for .050" Flat Ribbon (stranded) Cable, Color Coded PVC

### 28 AWG Cable:

Technical Specification: TS-0123 for .050" Flat Ribbon (stranded) Cable, Color Coded PVC  
TS-0059 for .050" Flat Ribbon (stranded) High Flex Life Cable, Black PVC  
TS-0080 for .050" Flat Ribbon (stranded) Cable, Gray PVC  
TS-0058 for .050" Flat Ribbon (stranded) Medium Flex Life Cable, Gray PVC  
TS-0419 for .050" Flat Ribbon (solid) Cable, Gray PVC  
TS-2334 for .050" Round Conductor Flat Cable, Halogen-free, Gray Polyolefin

---

## Electrical

**Voltage Rating:** 30 V

---

## Environmental

**Temperature Rating:** -20°C to +105°C

UL File No.: E86982

---

**3M**


Electronics Materials Solutions Division  
Interconnect Solutions  
<http://www.3M.com/interconnect>

3M is a trademark of 3M Company.  
For technical, sales or ordering information call  
**800-225-5373**

# 3M™ Molded Assembly

.100" x .100"

1M Series

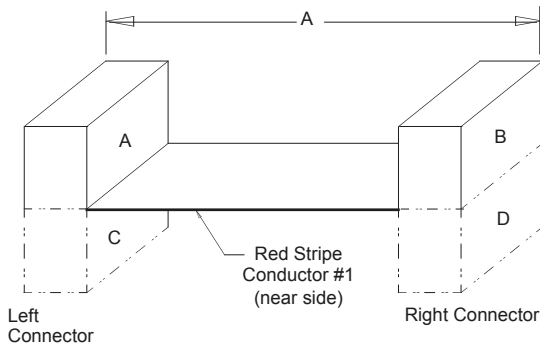

Length (Dim A) Tolerance		
Min	Max	Tol
1.7	10.0	±0.3
10.0	20.0	±0.5
20.0	40.0	±0.6
40.0	120.0	±1.0
120.0		±2.0



Note: A fan-out assembly, with multiple connectors on one end, requires a drawing submittal and review.

Connector/Pos.	6	8	10	12	14	16	18	20	24	26	28	30	34	36	40	44	50	60	64
Socket	X	X	X	X	X	X		X	X	X		X	X	X	X		X	X	X
PCB	X	X	X		X	X		X	X	X		X	X	X	X	X	X	X	X
.1" x .3" DIP	X	X			X	X	X	X			X								
.1" x .6" DIP									X		X				X				
All Cable	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Cable/Pos.	6	8	10	12	14	16	18	20	24	26	28	30	34	36	40	44	50	60	64

Note: If "Keying" is required, mark the circuit(s) to key Left Connector (Odd Row)

1																				63
2																				64
(Even Row)																				
<Red Cable Stripe																				
Right Connector (Odd Row)																				
1																				63
2																				64
(Even Row)																				

## Ordering Information

### Connector Types (Left and Right)

- Socket, Low Profile (.41")**
- 10 = with Military Polarization slots
  - 16 = with Centerbump and Military Polarization slots
  - 19 = with Dual Bump and Military Polarization slots
- Socket, Regular Profile (.56")**
- 30 = with Military Polarization slots
  - 36 = with Centerbump and Military Polarization slots
  - 39 = with Dual Bump and Military Polarization slots

### PCB, 2-Row

- A0 = Straight Matte Sn Solder Tail
  - A1 = Retention Matte Sn Solder Tail
- DIP, .1" x .3"**
- B0 = Matte Sn Plating, Straight Solder Tail
  - B1 = Matte Sn Plating, Retention Solder Tail
  - 50 = 15 Au Plating, Straight Solder Tail
  - 51 = 15 Au Plating, Retention Solder Tail
  - 60 = 30 Au Plating, Straight Solder Tail
  - 61 = 30 Au Plating, Retention Solder Tail

### DIP, .1" x .6"

- C0 = Matte Sn Plating, Straight Solder Tail
- C1 = Matte Sn Plating, Retention Solder Tail
- 80 = 15 Au Plating, Straight Solder Tail
- 81 = 15 Au Plating, Retention Solder Tail
- 90 = 30 Au Plating, Straight Solder Tail
- 91 = 30 Au Plating, Retention Solder Tail

1M XX XX - XXX - XXXX - XXX.X - XX - XX - XX - X

### Number of Cable Conductors

### Cable Product Series

- 26 AWG**
- 3801 = Stranded, PVC
  - 3811 = Stranded, PVC, Color Coded
- 28 AWG**
- 3302 = Stranded, PVC, Color Coded
  - 3319 = Stranded, PVC, High Flex Life
  - 3365 = Stranded, PVC
  - 3539 = Stranded, PVC, Medium Flex Life
  - 3709 = Solid, PVC
  - HF365 = Stranded, Halogen-free Polyolefin

### Assembly Length

- Tip-to-Tip inches  
(Dim A in inches)  
Example:  
001.7 = 1.7" Min

### Marking

- 0 = No Marking
- 1 = Label - Date Code
- 2 = Inkstamp - Date Code

### Left Right Centerbump Orientation Options

- 0 = None
- 1 = Inside
- 2 = Outside

### Connector Orientation Options (Left and Right)

- AB = Up-Up
- AD = Up-Down
- CB = Down-Up
- CD = Down-Down

### Left Right Connector Feature Options

- 0 = No Pull Tab or Keying Required
- 1 = Pull Tab (Socket only, not available on 6 or 8 Contact Quantity)
- 2 = Keying Required, specify position(s)
- 3 = Pull Tab and Keying Required, specify position(s)

Note: (RIA E1 & C1 apply for all cables and connectors listed)

TS-2149-F  
Sheet 2 of 2



Electronics Materials Solutions Division  
Interconnect Solutions  
<http://www.3M.com/interconnect>

3M is a trademark of 3M Company.  
For technical, sales or ordering information call  
**800-225-5373**