



3

2

1

RUBBER PART GENERAL TOLERANCE		
PART DIM.	1	2
0 TO 3	± 0.2	± 0.3
3 TO 6	± 0.2	± 0.4
6 TO 10	± 0.3	± 0.5
10 TO 18	± 0.3	± 0.6
18 TO 30	± 0.4	± 0.8
30 TO 50	± 0.5	± 1.0
50 TO 80	± 0.6	± 1.2
80 TO 120	± 0.7	± 1.4
120 TO 180	± 0.8	± 1.6
180 TO 250	± 1.0	± 2.0
250 TO 315	± 1.2	± 2.5
315 TO 400	± 1.5	± 3.0
400 TO 500	± 1.8	± 3.5
500 OVER	± 0.4 %	± 0.8 %
		± 1.5 %

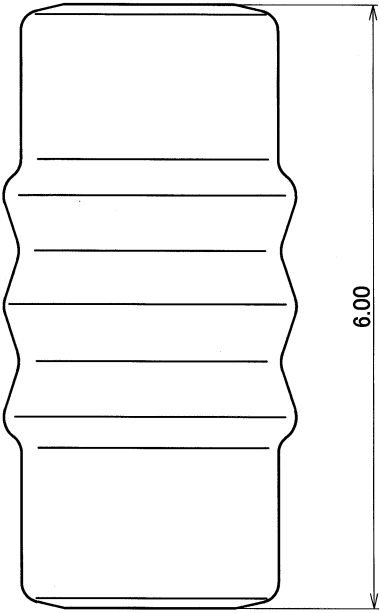

NOTES

注記

- 1. COLOR: GRAY. 1. 色: グレー
- 2. MATERIAL: SILICONE RUBBER. 2. 材料: シリコーン
- 3. APPLICABLE CONNECTOR PARTS NO.: 7282-8850-30, 7283-8850-30 ETC. 3. 適用コネクタ: 7282-8850-30, 7283-8850-30 ETC.

A

A

REVISION RECORD		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATERIAL SPEC.		TREAT. & FIN.				
DATE	NO.	OFFICE	TRIAL PART NO.	NAME	PART NO.	CH. CODE	NAME	SET DRW NO.	ISSUE MARK			
01/10/11	NEW	C01-Y060	X30158-T092	RH TYPE SEALING PLUG	7158-3169-40		RH TYPE SEALING PLUG					
GENERAL TOLERANCE												
10MAX	50MAX	100MAX	250MAX	250QVR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
±0.15	±0.2	±0.3	±0.5	±0.75	±30'	O. 1	R	NEW	01/10/11	mm	20:1	3
B	±0.2	±0.3	±0.55	±0.95	±1.4	O. 1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	Signature			SUGIYAMA	YAMAGUCHI	
SPECIFIED												
				MASS	g				01/10/16		01/04/16	01/10/11
YAZAKI CORPORATION												

2

3