


Model 73058
UHF Jack to Jack Adapter

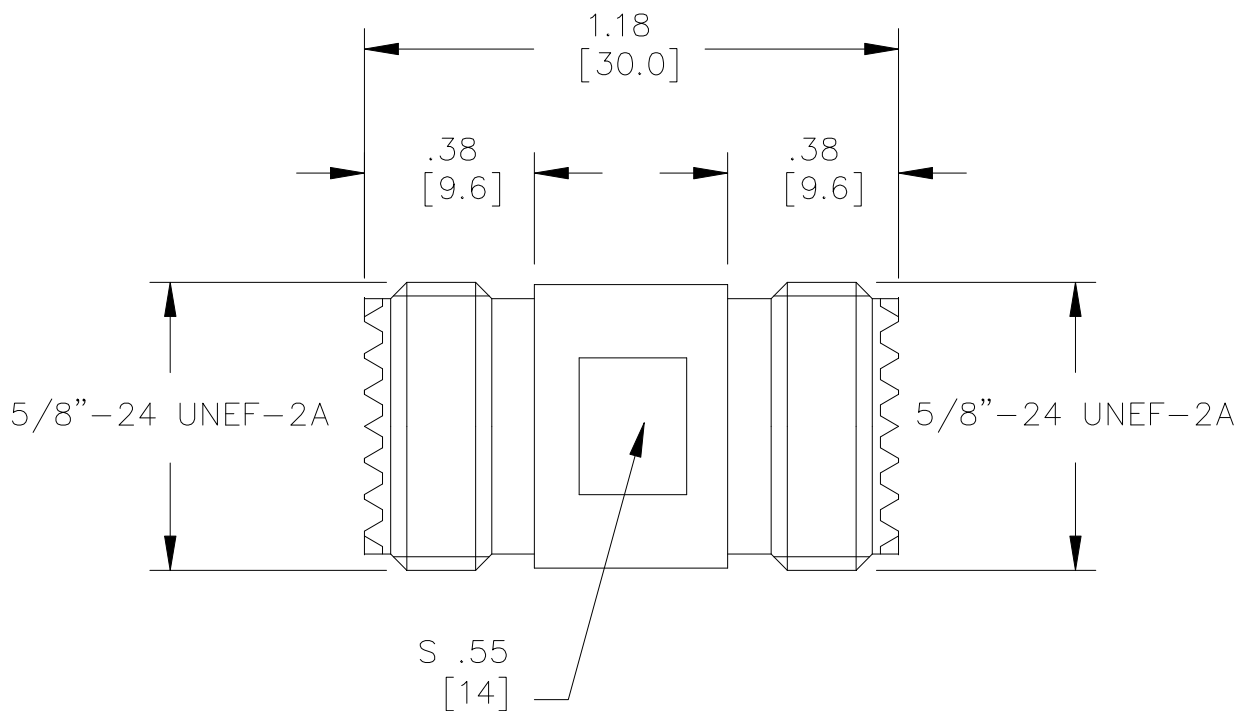

Model 73058
UHF Jack to Jack Adapter

Features

- DC – 300MHz bandwidth.
- Connectors are precision machined.

Materials

Center Conductor: Phosphor Bronze, Gold Plated
Connector Body: Brass, Nickel Plated
Insulators: PTFE

Specifications

Frequency Range: DC – 300MHz
Contact Resistance:
 Center Conductor: ≤1.0 mΩ
 Outer Conductor: ≤0.2 mΩ
Insulation Resistance: ≥ 300 MΩ
Dielectric Withstand Voltage: 750V
For CE compliance, do not hold in hand when voltages exceed 33 Vrms / 70 Vdc.
Number of Insertions: 500 cycles minimum

Ordering Information

Model: **73058**

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.