
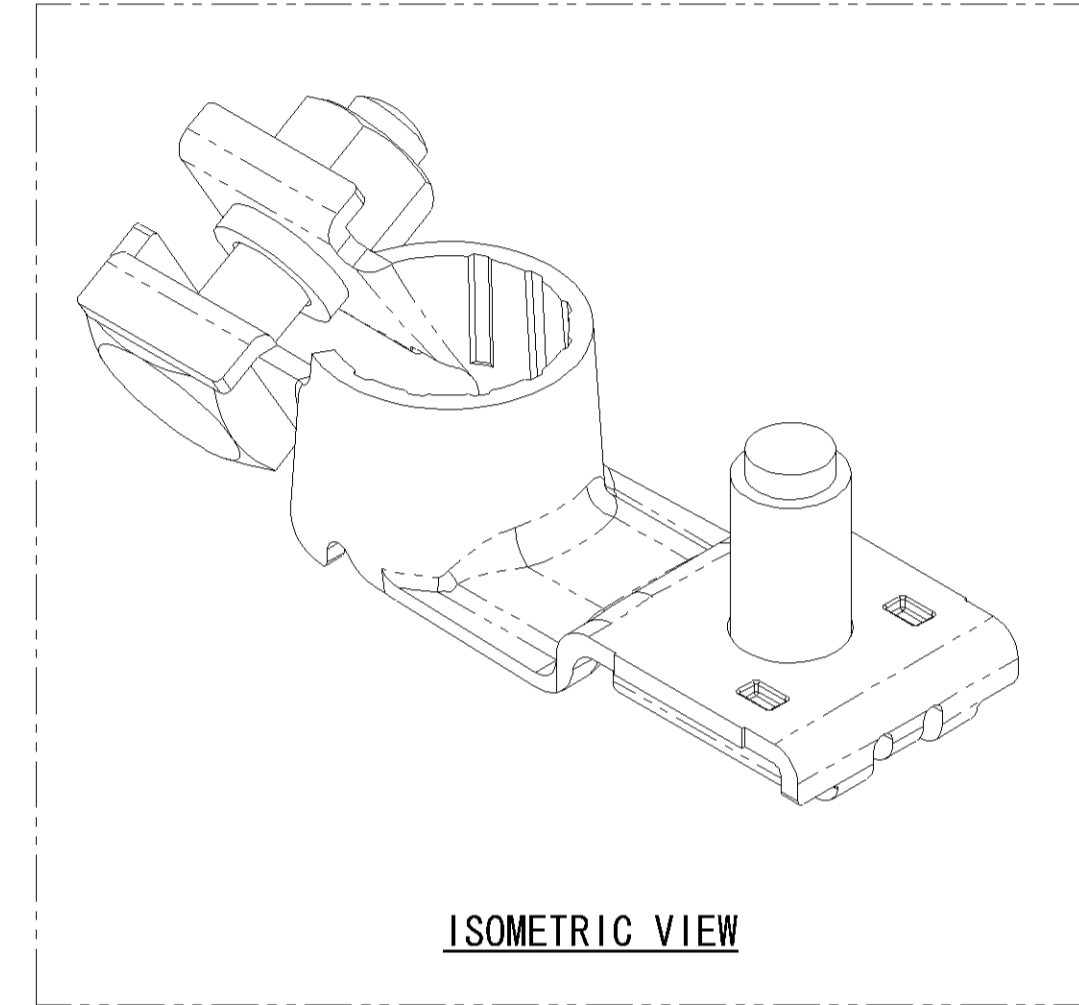


	1	2	3	4	5		
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
TOLERANCE	±0.5	±0.8	±1.5	±2.5	±3	±5°	0.3

NO.	PART NO.	PART NAME	MATERIAL	FINISHING	REMARKS
①	7106-3530-02	BATTERY TERMINAL BASE STUD N-	COPPER ALLOY (t=1.6)	PLAT-Sn	
②	7150-1202	STUD BOLT	SWRCH	PLAT-Sn	M8
③	7150-1085	SQUARE BOLT	SWRCH	PLAT-Sn	M6
④	7151-1063	NUT	SWRCH	PLAT-Sn	M6

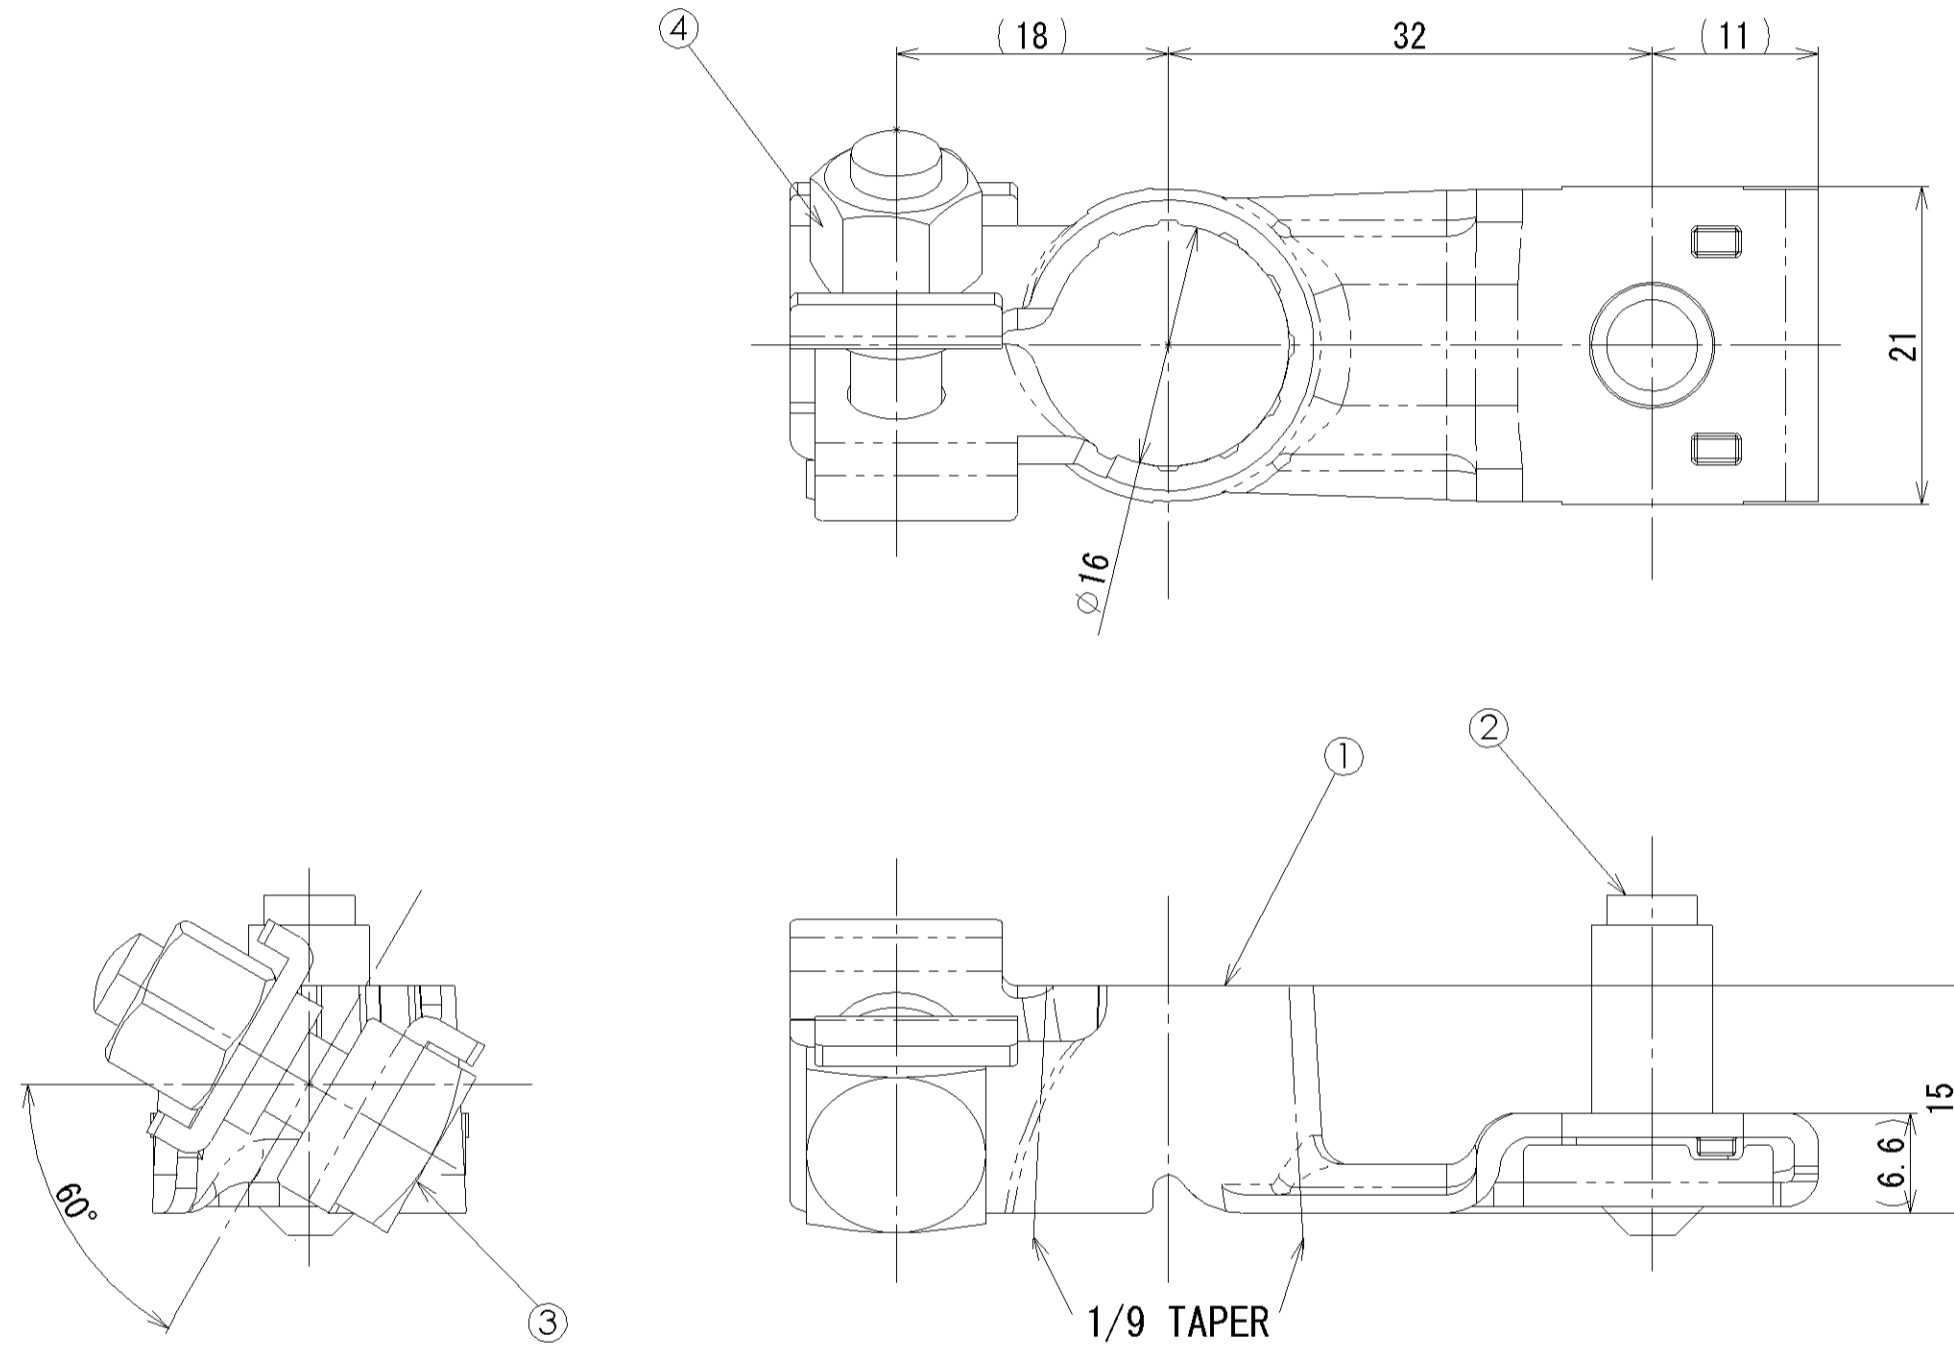

注記
 1. ② スタッドボルトヘナット締め付けトルク: 11~13N·m
 2. ③・④ 適性締め付けトルク: 5~7N·m
 3. 適用電線サイズ: MAX.30sq

NOTES
 1. ② STUD BOLT TIGHTING TORQUE: 11~13N·m
 2. ③・④ TIGHTING TORQUE: 5~7N·m
 3. APPLICABLE WIRE SIZE: MAX. 30sq

09.03.16	NEW	C09-0A11	S. N
LET	DATE	REVISION RECORD	NO. CHKD

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	+30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	+30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	+30'	0.15
SPECIFIED	SEE TABLE					MASS	APPROX. 53 g

CUSTOMER		MATERIAL SPEC.		TREAT. & FIN.	
CUSTOMER PART NO.		SEE TABLE		SEE TABLE	
CUSTOMER DWG NO.		NAME			
		BATTERY TERMINAL ASSY STUD N-			
OFFICE		TRIAL PART NO.			
VENDOR					
VENDOR NO.					
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	09.03.16	mm	2:1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
T. SUZUKI	Y. SUZUKI	S. UEMATSU	S. UEMATSU	S. NAKATSUGAWA	
PART NO.		7306-3530-01			
CH. CODE					
DWG NO.		7306-3530-01:R			
SET DWG NO.					
YAZAKI CORPORATION					