


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

758-38-9

REVISIONS	
ISSUE	CHANGES
0	ER 39186 JPK 10/25/04

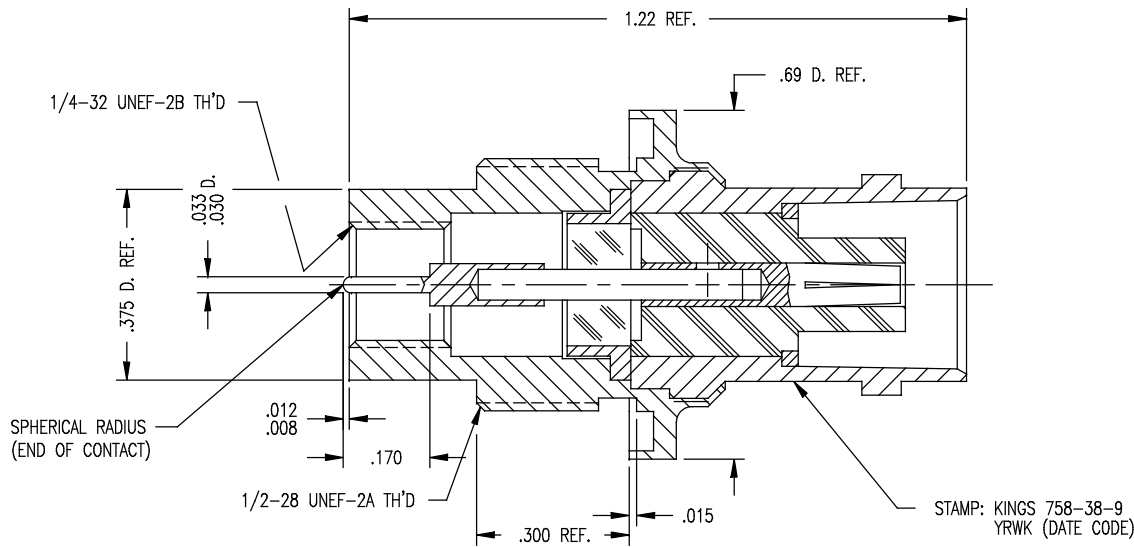

NOTES:

- BNC INTERFACE PER MIL-STD-348, FIG. 301-2.
- MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-1457
 - CENTER CONTACT: BER. COPPER, ASTM-B-196
 - GLASS SEAL: CONDUCTOR: NICKEL-IRON ALLOY (KOVAR)
 - GLASS: COMPRESSED
 - ALL OTHER METAL PARTS: BRASS, QQ-B-626
- FINISHES:
 - FEMALE CONTACT } HARD GOLD PLATE PER MIL-G-45204
 - MALE CONTACT } HARD GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 500 VRMS
 - FREQUENCY RANGE: DC TO 4 GHz.
- ENVIRONMENTAL CHARACTERISTICS:
 - LEAKAGE RATE SHALL NOT EXCEED 5×10^{-9} CC/SEC OF TRACER GAS AT ATMOSPHERIC PRESSURE.

758389S

SCALE 4:1	
APPROX SURFACE AREA	
WAS: E-16631	
USED ON	
REF: CANBERRA DWG. NO. B-18577 REV. G	
ADAPTER, F-F, BULKHEAD, HERM. SEALED, BNC	
DRAWN J. KENNEDY	DATE 10/25/04
DESIGN MJB	DATE 11/07/90
APPR.	DATE

GSD

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29715

758-38-9