

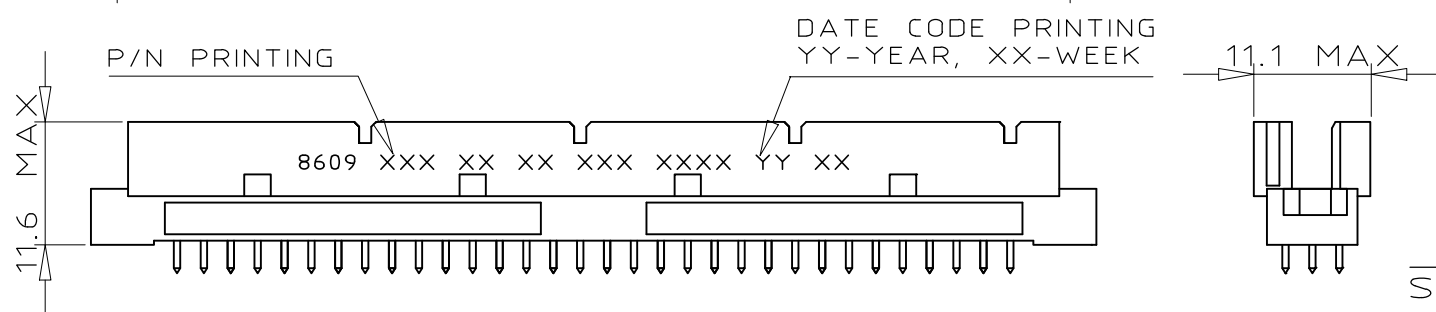


DIMENSIONS

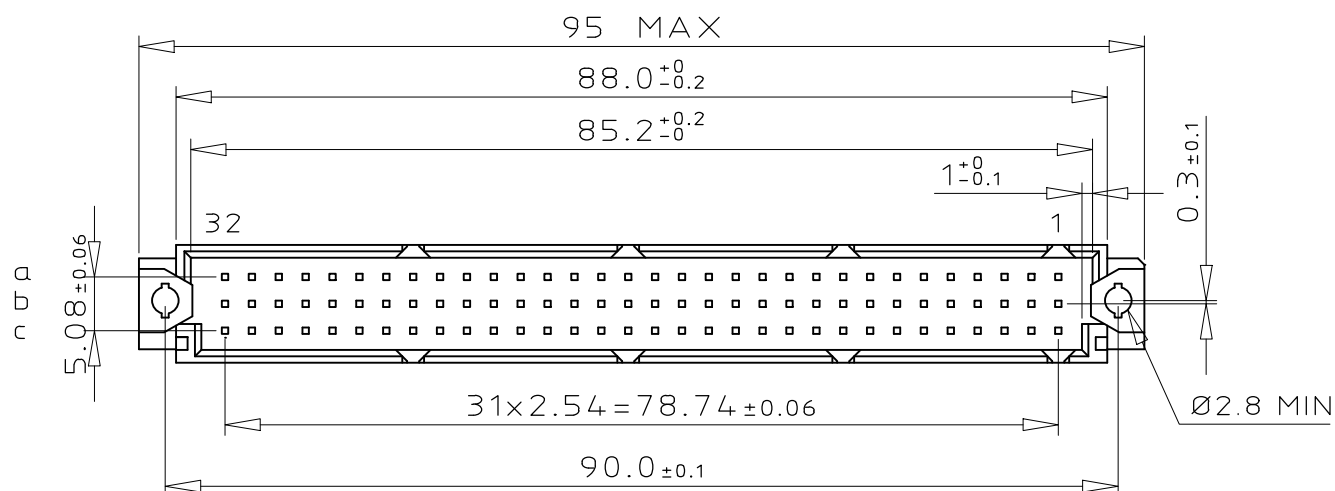

PCB LAYOUT

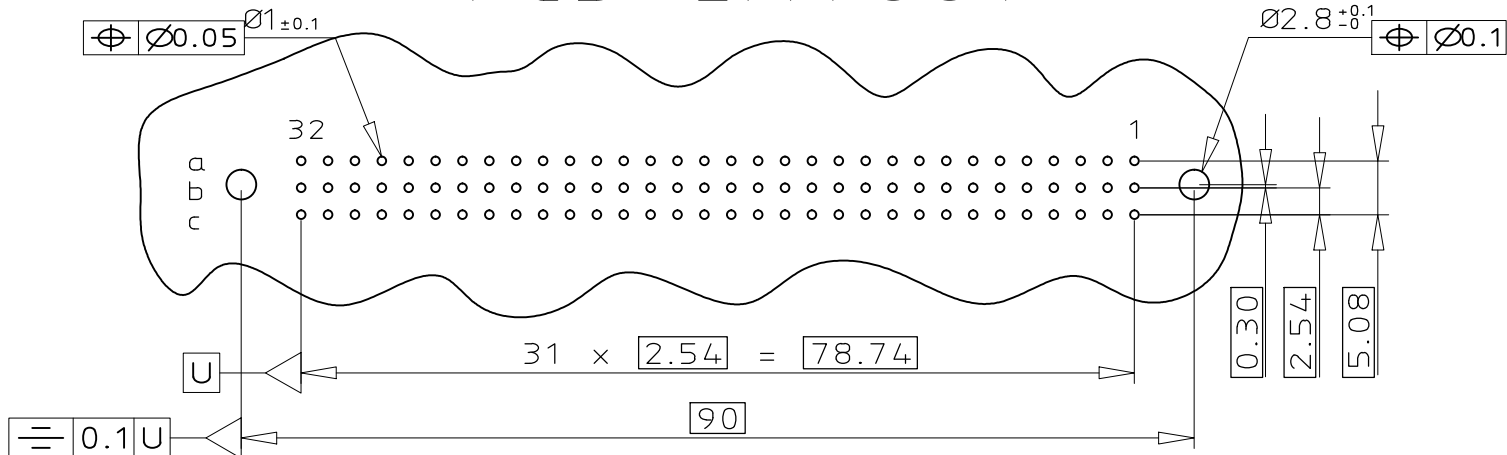


CONTACT ARRANGEMENT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	X	X								X	X	X	X	X							X	X										
b	X	X								X		X									X	X	X	X	X	X						
c	X	X																					X									

STANDARD CONTACT
 EMPTY CAVITY
 FMLB CONTACT
 LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO
REFER DRAWING C-8609-0000A

TERMINATION

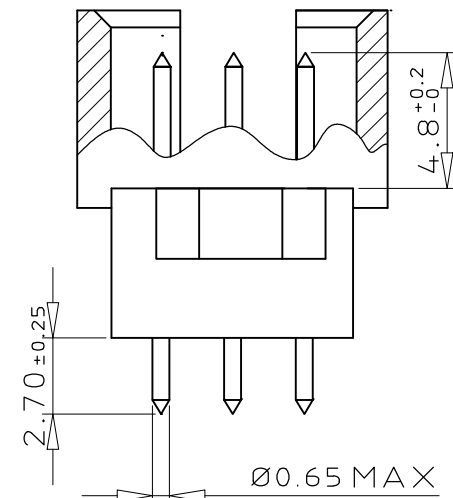

ORDERING INFORMATION

SERIES	8609	3	24	7	8	24	7	4	0	FXLF
ROWS FITTED WITH CONTACTS										
ROW a b c	3 24									
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR	7									
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R	8									
TERMINATION										
STRAIGHT SPILL SHORT	24									
OPTIONS										
NO OPTION	7									
PERFORMANCE CLASS										
DIN 41612 CLASS 3	4									
DIN 41612 CLASS 2	5									
DIN 41612 CLASS 1	6									
AS PER MIL C 55302 / JSS 50808	8									
PITCH PER ROW										
MIXED PITCH	0									
LEAD FREE VERSION SPECIAL LOADING	FXLF									

mat'l. code SEE DWG C-8609-0000A	surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family 8609
ltr A	ecn no 110-0227	dr SAL	date 2010-11-20	title DIN REVERSE HEADER STRAIGHT SPILL DIN 41612 STYLE R
angles 0°±2°				linear 0.X ±0.1 0.XX ±0.1 0.XXX ±0.1
dr KESAVAN R 2009-04-02				dwg no C-8609-2181 sheet 1 of 1 size A3 type Product Customer Drawing
enrg KESAVAN R 2009-04-02				
chr S ALOSIUS 2010-11-20				
appd BIJU K PAUL 2010-11-20				
sheet index	revision sheet	A	1	



Copyright FCJ