

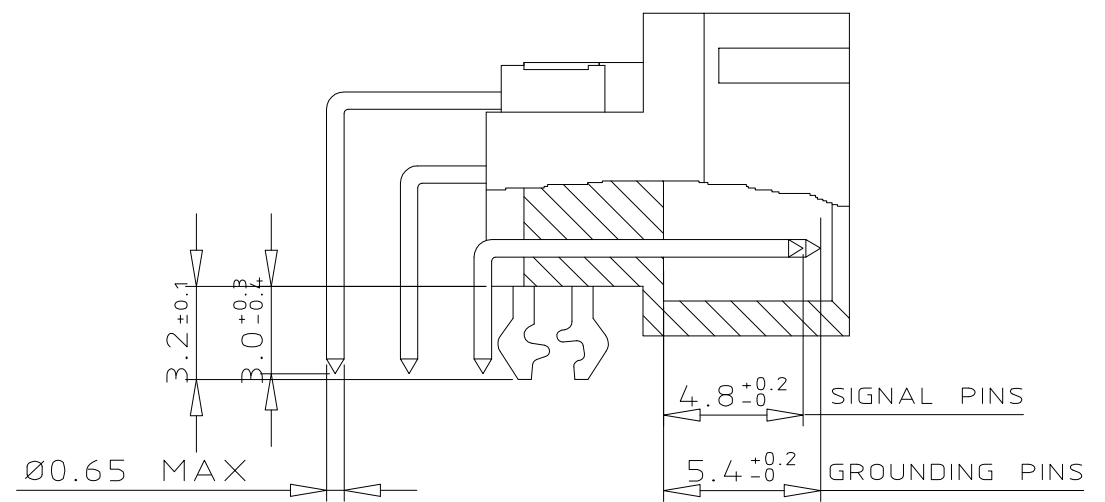
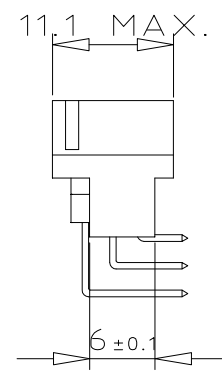
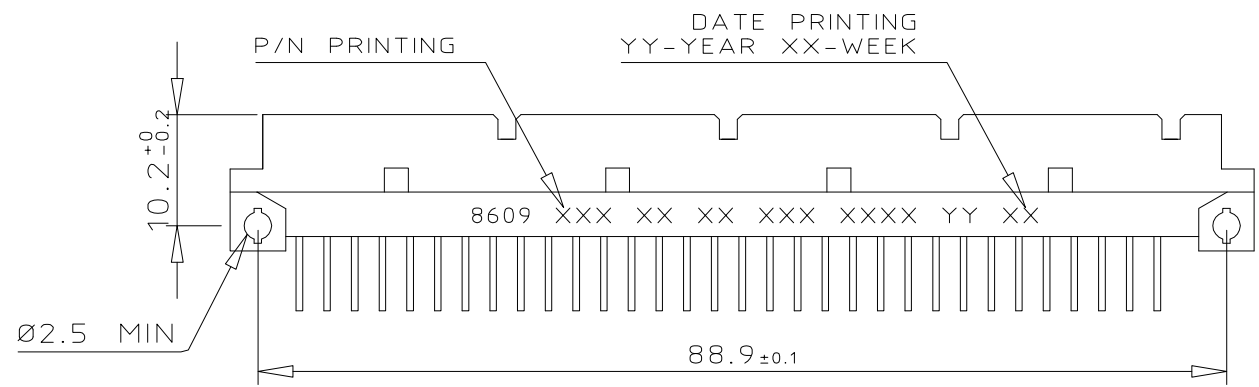


DIMENSIONS

TERMINATION

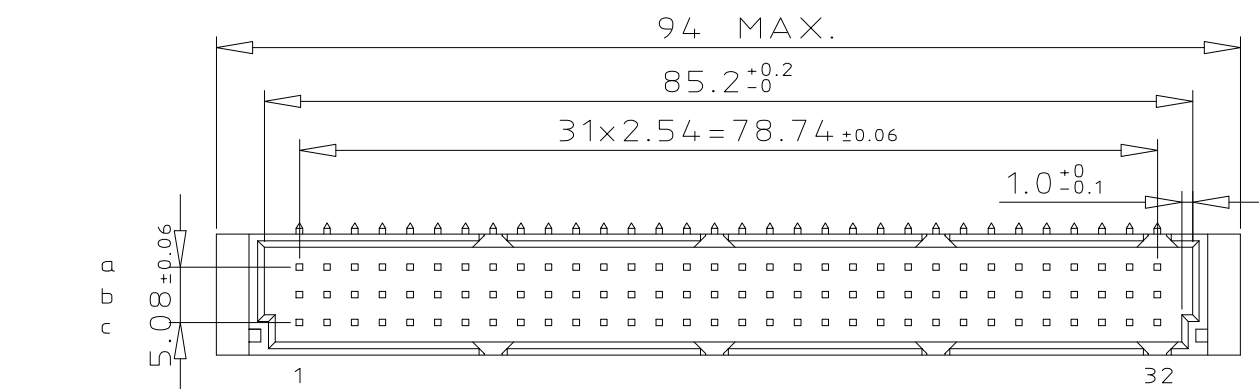

PCB LAYOUT

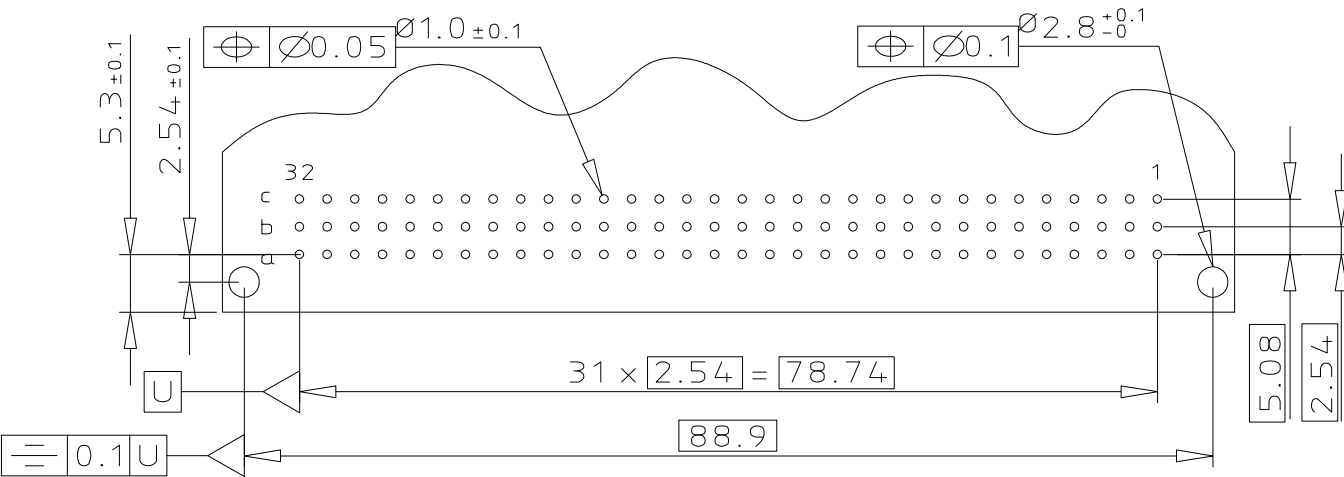

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	5	5	TBLF
ROWS FITTED WITH CONTACTS										
ROW a b c	3 96									
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR	7									
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C	1									
TERMINATION										
ANGLED SPILL	13									
OPTIONS										
NO OPTION	7									
WITH HARPOONS	H									
PERFORMANCE CLASS										
DIN 41612 CLASS 3	4									
DIN 41612 CLASS 2	5									
DIN 41612 CLASS 1	6									
AS PER MIL C 55302 / JSS 50808	8									
PITCH PER ROW	5									
2.54mm										
LEAD FREE VERSION SPL CONTACTS LOADING	TBLF									

CONTACT ARRANGEMENT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	
a	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
b	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
c	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓

STANDARD CONTACT
 EMPTY CAVITY
 FMLB CONTACT
 LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO
REFER DRAWING C-8609-0000A

mat'l. code	surface	tolerance	projection	product family
SEE DRAWING C-8609-0000A	ISO 1302 ✓	ISO 406 ISO 1101		8609
ltr	ecn no	dr	date	title
A	109-0050	KR	2009-03-28	DIN STANDARD HEADER ANGLED SPILL DIN 41612 STYLE C
tolerances unless otherwise specified				scale 3:2
angles				mm
linear				0.X ±0.1
				0.XX ±0.1
				0.XXX ±0.1
dr				KESAVAN R 2009-03-28
enr				KESAVAN R 2009-03-28
chr				KESAVAN R 2009-03-28
appd				BIJU K PAUL 2009-03-28
sheet	revision	FCI		
index	sheet	1	dwg no C-8609-2180 sheet 1 of 1 size A3	
				type Product Customer Drawing