


8559 Series Modular Junction Blocks

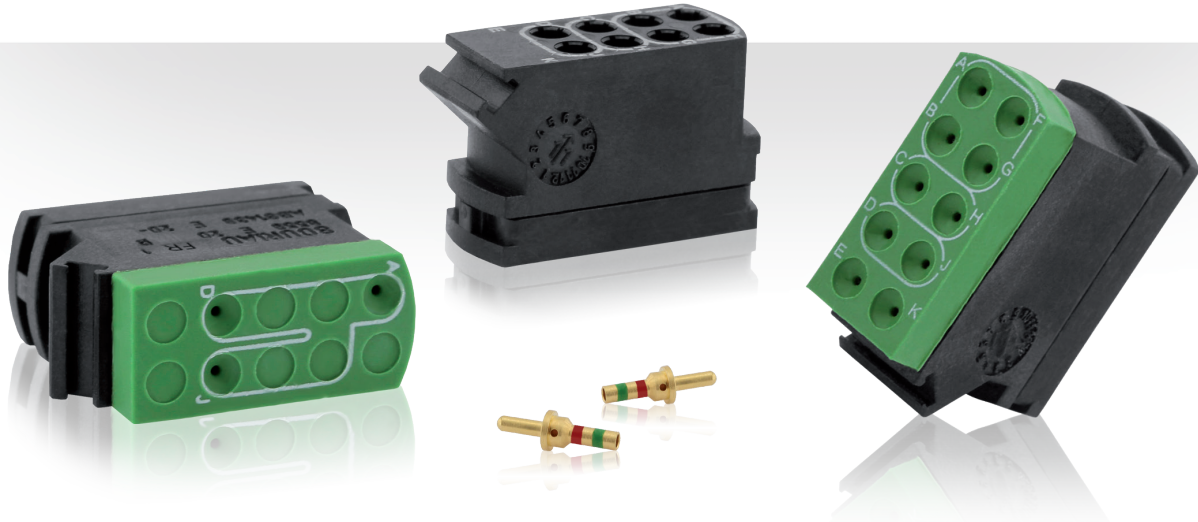

Interconnect Technology for Airframes

Building interconnection combinations of variable and transformable composition under a compact size.

Versatility ■ Contacts: size 22 or 20.
Sealed and unsealed version.

RoHS compliant ■ Many layouts available.

Easy to install ■ Termination modules are easily installed on a mounting rail.

Flight proven ■ Used on major airframer programs.

Standards ■ NSA937901 qualified.
Developed in accordance with EN3708.

Integrated components ■ Two new modules #20: layouts 12 & 13.
Use some features of CAN bus technology.

Description

- Two types of modules
- Contacts: size 22 or 20
- Sealed and unsealed version
- Standards: NSA937901 qualified
- Developed in accordance with EN3708



Technical features

Mechanical

- **Module:**
thermoplastic
- **Grommet:**
silicone elastomer (for sealed version)
- **Module clamp:**
stainless steel
- **Contact:**
copper alloy
- **Contact plating:**
gold over nickel
- **Vibration:**
to EN3708 - 10 to 2000 Hz - 10 g
- **Shock:**
to EN3708 - 100g peak during 6 m/s
- **Contact retention:**
size 22 - 40 N
size 20 - 67 N

Electrical


- **Test voltage:**
1500 Vrms (all layouts, except 12 & 13)
750 Vrms (layouts 12 & 13 only)
- **Contact resistance:**
size 22 - 5 mΩ
size 20 - 4 mΩ
- **Insulation resistance:**
≥ 5000 MΩ (under 500 Vdc)
- **Working current per contact:**
size 22 - 5 A
size 20 - 7.5 A

Environmental

- **Temperature range:**
-55°C +175°C (all layouts, except 12 & 13)
-55°C +125°C (layouts 12 & 13 only)
- **Damp heat:**
to EN3708 - 21 days
- **Salt spray:**
48 hours
- **Resistance to fluids:**
JP5
Skydrol 500 B4
Skydrol LD 4
MIL-PRF-7870C
MIL-PRF-23699F
AMS 1424


Contact layouts

Contact #22

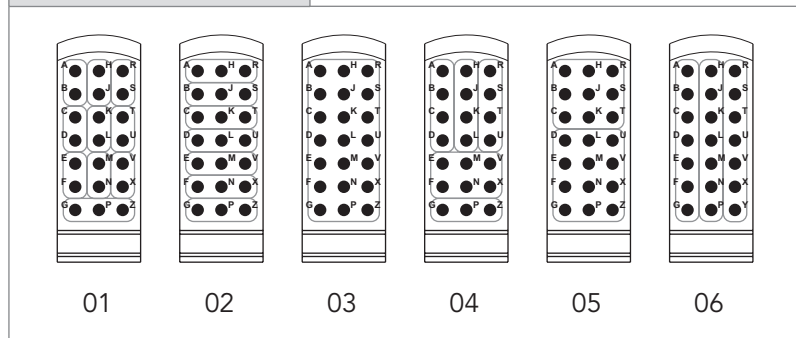

Note: Module delivered without contact. Contact #22 Part Number: EN3155016M2222.


Contact #20

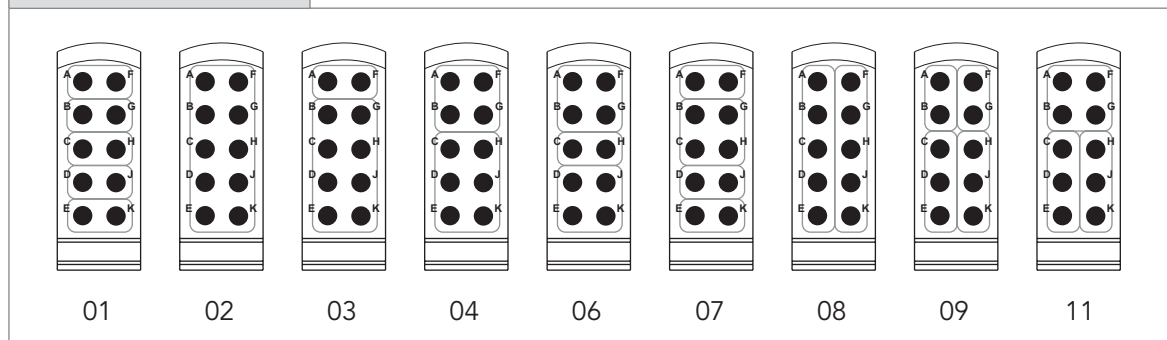

Note: Module delivered without contact. Contact #20 Part Number: EN3155016M2018.

Module with integrated components

Contact #20

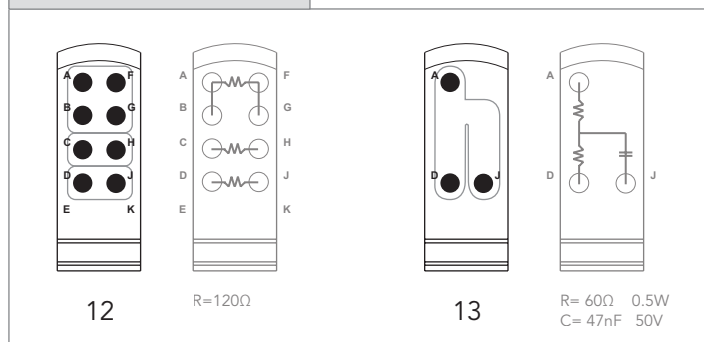

Note: Module delivered with contacts. For other electrical layouts, please consult us.

Ordering information

Module part numbers

Basic Series	8559	N	20	01	B
Class:					
N: unsealed module (not available for layout 13)					
E: sealed module					
Module type:					
22: size 22 contact					
20: size 20 contact					
Contact layouts:					
see tables next page					
Last version:					
B					

Dimensions

Module & Module clamp

Module

A Max.	Unsealed module	Sealed module	
		All layouts, except layout 13	Layout 13
	19 mm	20 mm	22 mm

Module clamp

Part Number: **8559 S**

Note: All dimensions are in millimeters (mm)