

MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT, 8 CHANNELS

IN: 24 V DC OUT: 24 V DC / 5x 2 A CL2 & 3x 6 A



MICO BASIC 5.2/3.6

8 channels

Current adjustment 5x 2 A; 3x 6 A

[Link to Product](#)

Illustration

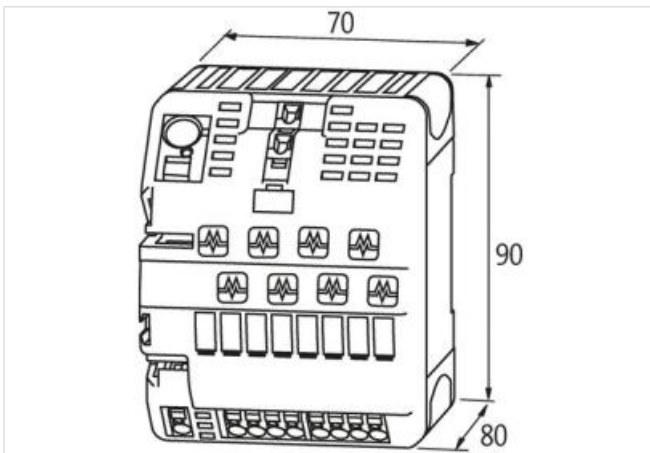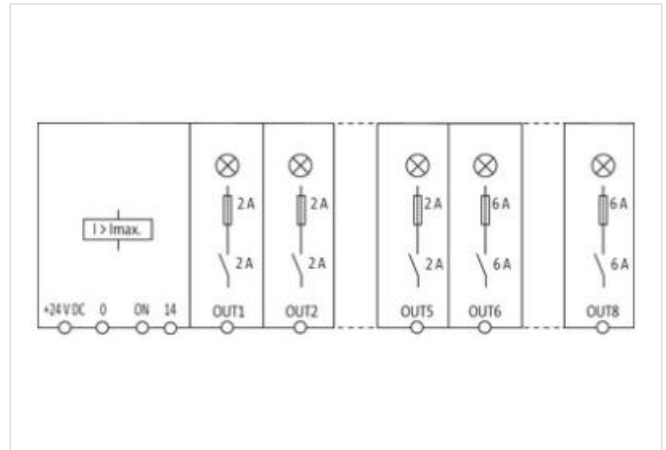

Product may differ from Image



Classifications

ECLASS-6.0	27371802
ECLASS-6.1	27371802
ECLASS-7.0	27371802
ECLASS-8.0	27371802
ECLASS-9.0	27371802
ECLASS-10.1	27371802

ECLASS-11.1 27371802

ECLASS-12.0 27371802

ETIM-5.0 EC001440

Electrical data | Input

Input voltage DC 24 V

Input voltage DC min. 18 V

Input voltage DC max. 30 V

ON input voltage control inputs min. 10 V

ON input voltage control inputs max. 30 V

ON pulse length control inputs high min. 20 ms

Total current bridge set max. 40 A

Electrical data | Output

Switch-on capacity per channel max. 20 mF

Switching current max. 20 mA

InstallationConnection cross-section outputs max. 4 mm²Connection cross-section inputs max. 16 mm²Connection cross-section control inputs/outputs max. 2,5 mm²**Mechanical data | Mounting data**

Mounting method geschnappt

Suitable for mounting type Mounting rail TH35, (EN 60715)

Height 90 mm

Width 70 mm

Depth 80 mm

Environmental characteristics | Climatic

Operating temperature min. 0 °C

Operating temperature max. 55 °C

Storage temperature min. -40 °C

Storage temperature max. 80 °C

Connection type 1

Family construction form Bridging Contact

Gender female

Color contact carrier black

No. of poles 1

Connection type 2

Family construction form Bridging Contact

Gender female

Color contact carrier black

No. of poles 1

Connection type 3

Connection Spring clamp terminals FK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 1

Connection type 4

Connection Spring clamp terminals FK

Family construction form terminal

Gender female

Color contact carrier green