

Mico Pro Power module

IN: 24 V DC / 40A, 16mm² / Cover plate included (heavy duty)


Mico Pro® PM 24 V DC/40 A
 Cover plate included (heavy duty)
 Shock load
 1/2 sin 40 g, 11 ms
 Build your own Mico Pro® online:
[START](#)

Link to Product

Illustration



Product may differ from Image

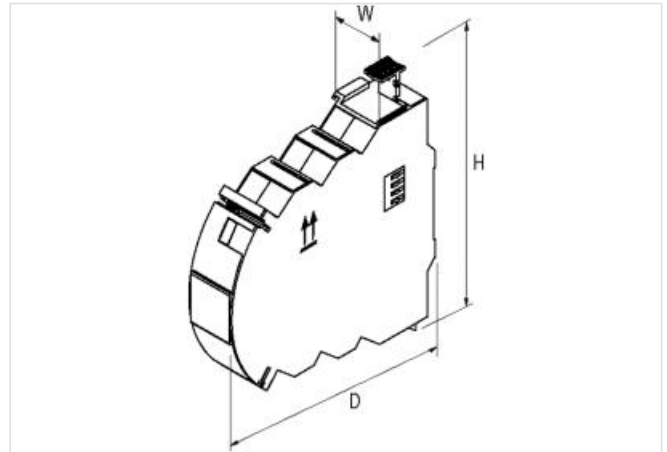

Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A

Output

Parallel usage/serial usage	-/Selectivity in 2 levels
-----------------------------	---------------------------

Control inputs

Input voltage (ON)	9...30 V DC
Impulse length (CTRL)	OFF "high" 40/400 ms, ON "high" 20/200 ms
Input voltage (CTRL)	9...30 V DC
Impulse length (ON)	"high" 120 ms

Control outputs

Early warning (90%)	max. 30 V AC/DC
Group alarm output	max. 30 V AC/DC

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20

Dimensions H×W×D	130×24×114 mm
Bridging concept	Bridge set (max. 40 A)
Shock load	1/2 sin 40 g, 11 ms
Connections (IN)	
Connection	Bridge system
Connections (OUT)	
Cross section (flex)	0.75...16 mm ² (AWG 20...4)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.75...16 mm ² (AWG 20...4)