

HIRSCHMANN MOBILITY



CELLULAR (2G/3G)/ AM/FM (LW/MW/SW/ Band II) Screw Antenna

CR 8521 RD S
Pt no.
920-445-001

- Amplifier and duplexer are integrated into base
- Detachable anti-noise rod
- Road Vehicle Roof


Subject to alterations

Technical data





Dimensions	64 x 46 x 47 mm	
Rod length	400 mm	
Weight	ca. 116 g	
Tightening torque	max.	4 Nm
Temperature range	-40 – +85°C	
Protection class	IP6k9k (acc. ISO 20653)	
AM/FM		
Frequency range	AM:	0,15 - 16,2 MHz
	FM:	87 - 108 MHz
Impedance	150 Ohm	
Gain	AM:	10 dB
	FM:	6 dB
Voltage supply	12 VDC (9 - 16 VDC)	
Cable type	RG 174	
Cable length	AM/FM:	240 +10 mm
	Power:	190 +10 mm
Connector	AM/FM:	M 10 x 0,75 male
	Power:	2,8 mm blade terminal
Cellular		
Frequency range	GSM 850:	824 - 894 MHz
	GSM 900:	880 - 960 MHz
	GSM 1800:	1710 - 1880 MHz
	GSM 1900:	1850 - 1990 MHz
	UMTS:	920 - 2170 MHz
Impedance	50 Ohm	
Gain	0 dB	
Return loss	> 10 dB	
Transmitter power	max.	20 W pulsed acc. GSM standard
Cable type	RG 174	
Cable length	140 +10 mm	
Connector	FME male	

Subject to alterations

Technical drawings

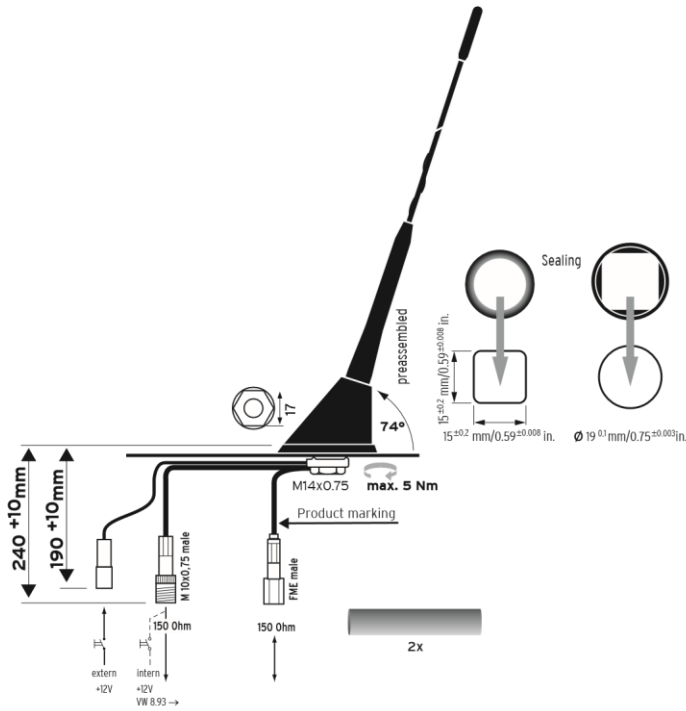

Antenna diagrams
 Typ. VSWR



www.te.com/hirschmann-mobility
hirschmann-mobility@te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks.
 Hirschmann is a trademark.

GSM and UMTS are trademarks.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.