


| REVISIONS | | | |
|-----------|-------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| C | REDRAWN | 12/23/11 | J.S. |



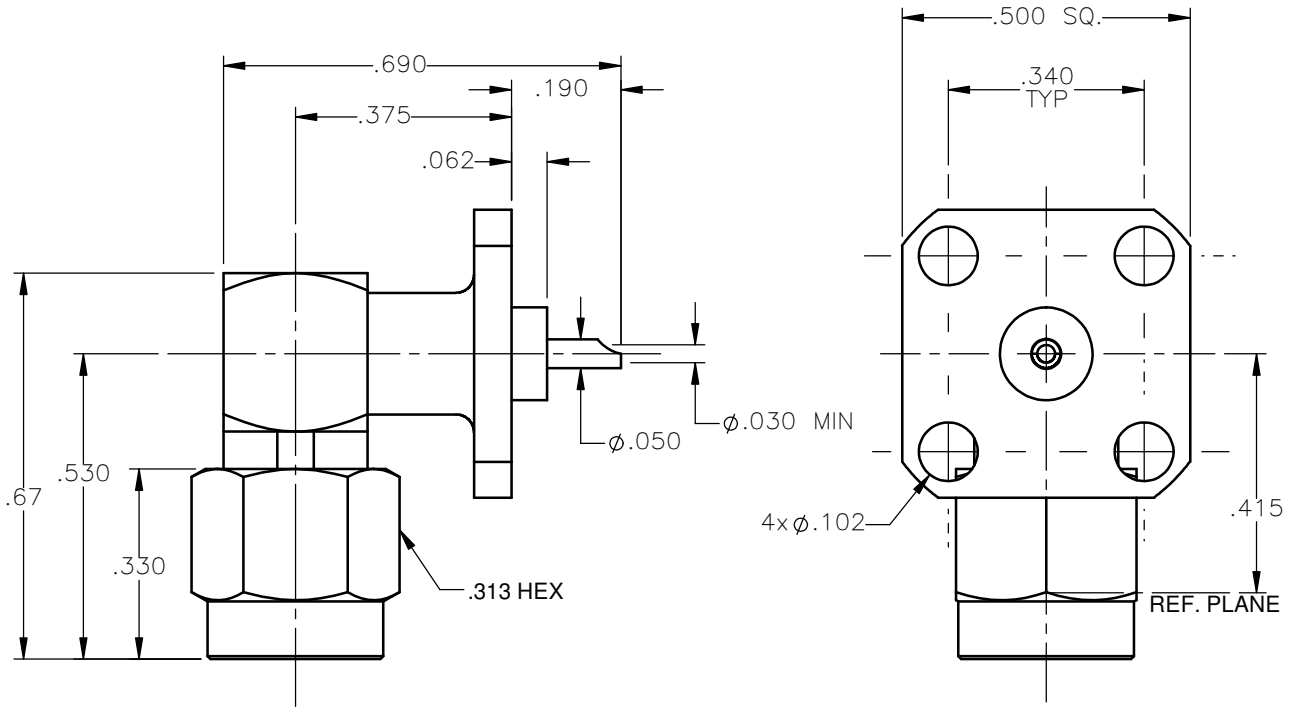


NOTES: CONFORMS TO MIL-C-39012 SMA SERIES.

MATERIALS:

1. BODY & COUPLING NUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. INTERFACE CONTACT & RETAINING RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
4. REAR CONTACT & CAP = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
5. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

1. CAP = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.
2. CONTACTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
3. ALL OTHER METAL PARTS = PASSIVATE PER QQ-P-35, TYPE VI.

| | | | | |
|---|-----------------------|--|--|---|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON | DWN: | DATE |  Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL. |  |
| | J.S. | 12/23/11 | | |
| | CHKD: | DATE | | |
| DECIMAL | ANGLE | M.J. | 12/23/11 | SMA RIGHT ANGLE PLUG 4 HOLE FLANGE MOUNT SOLDER POT TERMINAL |
| | | APVD: | DATE | |
| | | J.M. | 12/23/11 | SIZE A FSCM NO. 19505 DWG NO. 9454-9513-000 REV C |
| REFERENCE: | MATERIALS & FINISHES: | SCALE 3:1 THIRD ANGLE PROJECTION  SHEET 1 OF 1 | | |
| ORIGINATED: J.S. DATE: 12/23/11 | SEE NOTES | | | |

9454-9513-000