

# HIRSCHMANN MOBILITY

# CELLULAR (2G/3G/4G) Magnetic Antenna



**CEL 7026 RD M/series**

Pt no.

**955-006-...**

- 2G through 4G / LTE service

Subject to alterations


## Technical data

Dimensions	∅ 30 mm x 91.4 mm
Housing Materials	ASA+PC
Weight	ca.71g
Temperature range	-40→+80°C
Protection class	IP66(acc. IEC60529)
<b>CELLULAR</b>	
Frequency range	LTE (low): 698 - 862 MHz LTE (high): 2305 - 2690 MHz GSM 850: 824 - 894 MHz GSM 900: 880 - 960 MHz GSM 1800: 1710 - 1880 MHz GSM 1900: 1850 -1990 MHz UMTS: 1920 - 2170 MHz
Impedance	50 Ohm
Load capacity	max. 10 W pulsed acc. GSM standard
Return loss	> 12dB
Gain	3 dBi

Product name	Order code	Cable	Connector
		RG 174 Low Loss	
CEL 7026 RD M/FME/2.5	955-006-001	2500 mm	FMEf
CEL 7026 RD M/SMA/2.5	955-006-002	2500 mm	SMAm

Subject to alterations

Technical drawings

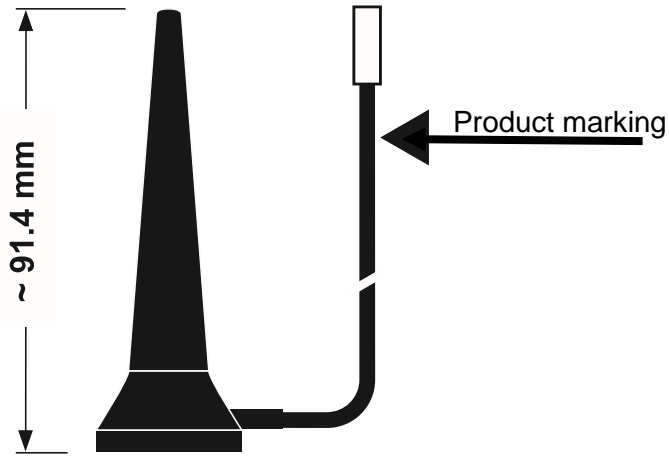

Installation

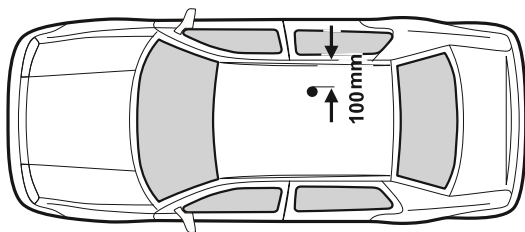


Fig. 1




Fig. 2





Fig. 3


Antenna diagrams

Typical VSWR

LTE/Cellular Low Band

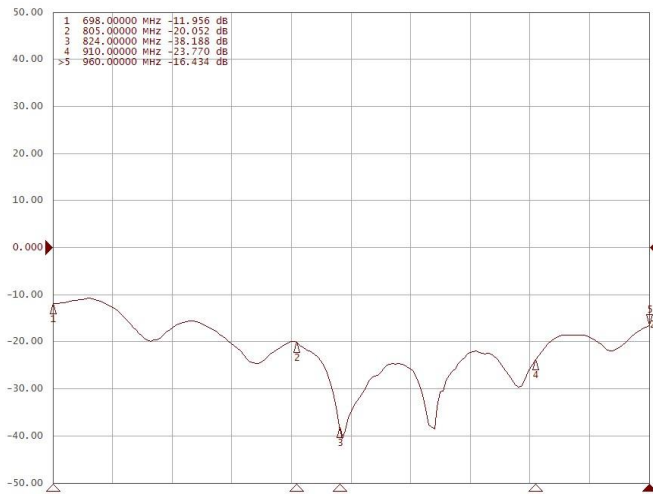

Cellular High Band

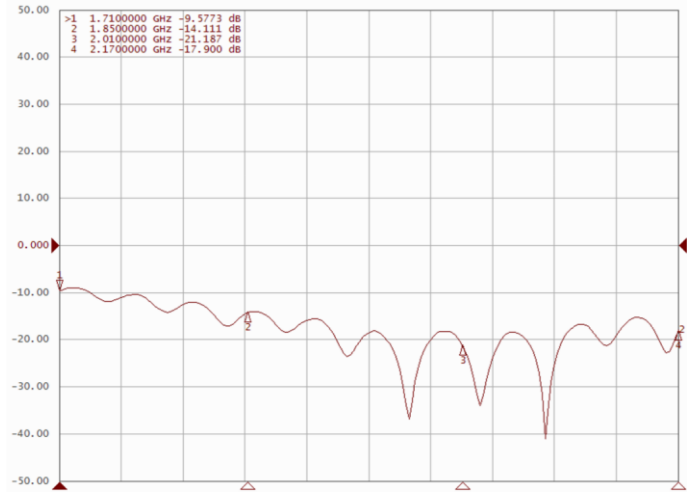

LTE High Band

