



## 96KVM-R17V8C-XX

### Drawer Features & Display Benefits

- ▶ 1U 17" LCD console drawer w/ combo DB-15 8-port KVM
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with touchpad
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 580mm



### Specifications

#### • LCD Panel

|                        |             |
|------------------------|-------------|
| Manufacturer :         | <b>AUO</b>  |
| Size (diagonal) :      | 17" TFT     |
| Max resolution :       | 1280 x 1024 |
| Brightness (cd/m2) :   | 250         |
| Backlight :            | LED         |
| Colors :               | 16.7 M      |
| Contrast ratio (typ) : | 1000 : 1    |
| Viewing angle (H/V) :  | 170° x 160° |
| Active area (mm) :     | 338 x 270   |
| MTBF (hrs) :           | 30,000      |
| Video input :          | VGA         |

#### • Keyboard layout : USA English

#### • Weight

|         |                   |
|---------|-------------------|
| Net :   | 13 kgs / 28.6 lbs |
| Gross : | 19 kgs / 41.8 lbs |

#### • Casing Color : Black (RAL 9005)

#### • Dimensions

|           |   |
|-----------|---|
| Product : | 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch |
| Packing : | 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch   |

#### • Power Input : Auto-sensing 100 to 240VAC, 50 / 60Hz

#### • Power Consumption with KVM integration

|                     |          |
|---------------------|----------|
| Screen on :         | Max. 30W |
| Power saving mode : | Max. 9W  |


#### • Environmental

|                          |                                    |
|--------------------------|------------------------------------|
| Operating temperature :  | 0 to 55°C degree                   |
| Storage temperature :    | -20 to 60°C degree                 |
| Operating humidity :     | 20~90%, non-condensing             |
| Storage humidity :       | 5 ~90%, non-condensing             |
| Operating altitude :     | 16,000 ft                          |
| Non-operating altitude : | 40,000 ft                          |
| Shock :                  | 10G acceleration ( 11ms duration ) |
| Vibration :              | 5~500Hz 1G RMS random vibration    |

#### • Regulatory

|                 |                         |
|-----------------|-------------------------|
| Safety :        | cUL, FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

### Combo DB-15 KVM



KVM port : 8 x combo DB-15 connector

#### Server Support

Video : Resolution up to 1920 x 1080 / 1920 x 1200


KVM Switching : via Front button, OSD menu & hotkeys

Connectivity : Combo 4-in-1 KVM cable

Combo KVM Cable : CE-6, 6 feet combo KVM cable ( bundle 8 pcs )  
CE-10, 10 feet combo KVM cable ( optional )  
CE-15, 15 feet combo KVM cable ( optional )  
( Server end : VGA + USB or PS/2 )  
( KVM port : VGA )

### Standard Keyboard

**Ge** G keyboard integrated with touchpad

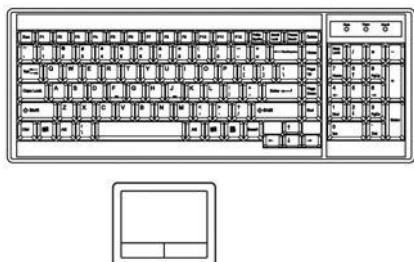

#### Optional layouts

|      |                |         |             |             |          |
|------|----------------|---------|-------------|-------------|----------|
|      |                |         |             |             |          |
| EMEA | United Kingdom | Germany | France      | Spain       | Norway   |
|      |                |         |             |             |          |
|      | Italy          | Russia  | Switzerland | Netherlands | Portugal |
| Asia |                |         |             |             |          |
|      | China          | Japan   | Korea       | Arabia      | Turkey   |

### Ordering Part Number

| Model           | Plug Type     |
|-----------------|---------------|
| 96KVM-R17V8C-EU | European Plug |
| 96KVM-R17V8C-IN | Indian Plug   |
| 96KVM-R17V8C-US | US Plug       |
| 96KVM-R17V8C-UK | UK Plug       |