



96KVM-R19V8C-XX

Drawer Features & Display Benefits

- ▶ 1U 19" LCD console drawer w/ combo DB-15 8-port KVM
- ▶ 104-key keyboard with touchpad
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 620mm



Specifications

• LCD Panel

| | |
|-----------------------------------|-------------|
| Manufacturer : | AUO |
| Size (diagonal) : | 19" TFT |
| Max resolution : | 1280 x 1024 |
| Brightness (cd/m ²) : | 250 |
| Backlight : | LED |
| Colors : | 16.7 M |
| Contrast ratio (typ) : | 1000 : 1 |
| Viewing angle (H/V) : | 170° x 160° |
| Active area (mm) : | 376 x 301 |
| MTBF (hrs) : | 30,000 |
| Video input : | VGA |

• Keyboard layout :

USA English

• Weight

| | |
|---------|---------------------|
| Net : | 13.7 kgs / 30.1 lbs |
| Gross : | 19.7 kgs / 43.3 lbs |

• Casing Color :

Black (RAL 9005)

• Dimensions

| | |
|-----------|-----------------------------------------------|
| Product : | 441.6 x 620 x 44 mm / 17.4 x 24.4 x 1.73 inch |
| Packing : | 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch |

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption with KVM integration

| | |
|---------------------|----------|
| Screen on : | Max. 30W |
| Power saving mode : | Max. 9W |


• Environmental

| | |
|--------------------------|------------------------------------|
| Operating temperature : | 0 to 55°C degree |
| Storage temperature : | -20 to 60°C degree |
| Operating humidity : | 20~90%, non-condensing |
| Storage humidity : | 5 ~90%, non-condensing |
| Operating altitude : | 16,000 ft |
| Non-operating altitude : | 40,000 ft |
| Shock : | 10G acceleration (11ms duration) |
| Vibration : | 5~500Hz 1G RMS random vibration |

• Regulatory

| | |
|-----------------|-------------------------|
| Safety : | cUL, FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

Combo DB-15 KVM



KVM port : 8 x combo DB-15 connector

Server Support

Video : Resolution up to 1920 x 1080 / 1920 x 1200

KVM Switching :

via Front button, OSD menu & hotkeys


Connectivity :

Combo 4-in-1 KVM cable

Combo KVM Cable : CE-6, 6 feet combo KVM cable (bundle 8 pcs)
CE-10, 10 feet combo KVM cable (optional)
CE-15, 15 feet combo KVM cable (optional)
(Server end : VGA + USB or PS/2)
(KVM port : VGA)

Standard Keyboard

Ge G keyboard integrated with touchpad

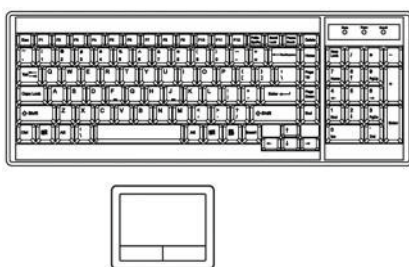

Optional layouts

| | | | | | |
|------|----------------|---------|-------------|-------------|----------|
| EMEA | United Kingdom | Germany | France | Spain | Norway |
| | Italy | Russia | Switzerland | Netherlands | Portugal |
| Asia | China | Japan | Korea | Arabia | Turkey |

Ordering Part Number

| Model | Plug Type |
|-----------------|---------------|
| 96KVM-R19V8C-EU | European Plug |
| 96KVM-R19V8C-IN | Indian Plug |
| 96KVM-R19V8C-US | US Plug |
| 96KVM-R19V8C-UK | UK Plug |