

Microsemi Adaptec® HBA 1100 Series: 1100-24i/16i/8i/8e/4i

12 Gbps PCIe Gen3 SAS/SATA Host Bus Adapter

Smart Storage and Connectivity

Today's data centers and enterprises need storage solutions that can keep pace with their rapid data expansion. The HBA 1100 is a product in the Smart Storage solutions family, forged through the convergence of Microsemi's SAS/SATA protocol controller expertise, more than 30 years of Microsemi board innovation, and the new Smart Storage stack. The HBA 1100 Series, available in five different configurations with up to 24 internal SAS/SATA ports, offers a large number of density options in a low-profile, MD2 form factor. It delivers the smart connectivity that businesses are looking for, with high resiliency, low power, and the performance required to unlock the capabilities of flash media.

Resiliency and Efficiency

The HBA 1100 delivers enterprise resiliency with its broadly deployed Smart Storage stack. Based on the PM8222 8x12G SmartIOC 2100 SAS/SATA protocol controller, the HBA 1100 Series provides a robust and stable solution that can handle the toughest system workloads and configurations. It offers over 40 percent power savings compared to previous generations, and significant power advantages versus competing solutions. It is fully tools-compatible with existing and future Microsemi HBA, RAID, and expander solutions.

Optimized for New Devices and New Use Cases


The HBA 1100 supports SMR HDDs and their specific command sets (ZAC/ZBC for SAS/SATA SMR drives), enabling cost-efficient solutions for warm and cold storage applications. It also supports the latest SAS and SATA SSDs. The HBA 1100 is also optimized for software-defined storage solutions, such as Microsoft Storage Spaces Direct, VMWare vSAN, and OpenStack Swift/Ceph.

Maximum Performance

The HBA 1100 Series provides the highest levels of storage performance and scalability for next-generation data centers. Using the new SmartPQI host OS device drivers that are optimized for low latency solid-state drives, HBA 1100 adapters can aggregate the performance of devices to the limits of the PCIe Gen3 host bus at 6.6 Gbps, and achieve up to 1.7M IOPS and 60 percent higher IOPS performance with SATA devices without additional overhead or latency.¹ The HBA1100-24i, with 24 internal ports, delivers the lowest latency and highest performance when connected to SSDs, with no need for expanders in most rack server applications.

Ease of Use

The HBA 1100, with its broad operating system support and ecosystem compatibility, is easy to implement and scale, connecting up to 24 storage devices. The unified maxView management tools and drivers across the Microsemi HBA, RAID, and expander solutions enable easy manageability across the entire product line.

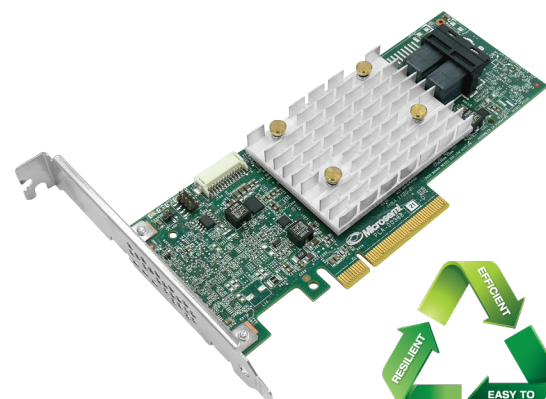

Benefits

- A 4- to 24-port HBA family, ideal for server solutions supporting SAS/SATA HDDs, tape devices, and SSDs that require maximum connectivity, bandwidth, and I/O performance
- Performance of up to 1.7M IOPS, low latency, and low CPU utilization fully saturating the x8 PCIe Gen3 host bus
- Inbox drivers and broad operating system support and device and platform capability provides a single solution for servers, and all device connectivity needs

Highlights

- Up to 24 native SAS/SATA ports; low-profile/MD2 form factor
- 12 Gbps SAS data rates using mini-SAS HD connectors
- Quality and reliability through the unified, hardened Smart Storage stack, which is deployed in over 30M servers
- Proven compatibility and seamless integration with existing Microsemi Adaptec solutions that leverage the unified maxView management tool suite for remote and local setup and maintenance
- Uses the latest 28 nm SmartIOC 2100 SAS/SATA protocol controller to drive efficiency and performance while also having the industry's lowest power consumption

¹16- and 24-port adapters can achieve 1.7M random read IOPS for 4 KB I/Os. Adapters with 8 ports and fewer are capable of 1.5M IOPS.

Microsemi Adaptec® HBA 1100 Series: 1100-24i/16i/8i/8e/4i

12 Gbps PCIe Gen3 SAS/SATA Host Bus Adapter

Specifications

Parameter	Description
Key software features	<ul style="list-style-type: none"> Support for up to 256 SAS/SATA target devices (238 SSD/HDDs maximum support and remainder are reserved for expanders and enclosure management) Multi-LUN support SAS expander support TLR SATA NCQ Hot plug drive support S.M.A.R.T. MPIO support Multi-initiator (host)/clustering for SAS Enclosure management <ul style="list-style-type: none"> SES-2, SES-3 SFF-8485, SGPIO SFF-8489, IBPI BMC support
Management utilities	<p>maxView Storage Manager</p> <ul style="list-style-type: none"> Web-based GUI management utility OS support: Windows, Linux, VMware Remote configuration, monitoring, and notification Remote firmware updates SMI-S support SMTP <p>ARCCONF</p> <ul style="list-style-type: none"> Command-line interface <p>BIOS Configuration Utility (CTRL+A)</p> <ul style="list-style-type: none"> Legacy configuration utility Flashable BIOS support <p>uEFI BIOS Configuration Utility</p> <ul style="list-style-type: none"> Flashable BIOS support HII GUI support
Operating systems	Microsoft Windows, Red Hat, SuSE, CentOS, Ubuntu, and VMware ESXi, FreeBSD, Solaris, Citrix XEN Server
Physical dimensions	2.535" H x 6.6" L (64 mm x 167 mm) for all SKUs except the HBA 1100-4i, which is 2.7" H x 5.2" L (68.58 mm x 132.08 mm)
Operating temperature	0 °C to 55 °C with 200 LFM airflow. Note: This adapter contains a powerful I/O processor that requires adequate airflow to operate reliably. Please install this card only into a server or PC chassis with at least 200 LFM airflow. Temperature measured 1 inch from adapter.
Regulatory certification	CE, FCC, UL, C-tick, VCCI, KCC, and CNS
Environmental compliance	RoHS
Warranty	3 years
Accessories	Serial Attached SCSI (SAS) cables (www.microsemi.com/product-directory/storage-boards/3686-cables-accessories)

Ordering Information

Microsemi HBA 1100 Series	Part Number	Host Interface	Form Factor	Ports	Connectors	MTBF at 40 °C
HBA 1100-24i	2293800-R	8-Lane PCIe Gen 3	Low-profile, MD2	24 internal	6 (x4) SFF-8643	2.73M
HBA 1100-16i	2293500-R			16 internal	4 (x4) SFF-8643	2.73M
HBA 1100-8i	2293200-R			8 internal	2 (x4) SFF-8643	1.36M
HBA 1100-8e	2293300-R			8 external	2 (x4) SFF-8644	1.38M
HBA 1100-4i	2293400-R			4 internal	1 (x4) SFF-8643	>1.4M



Microsemi Corporate Headquarters
 One Enterprise, Aliso Viejo, CA 92656 USA
 Within the USA: +1 (800) 713-4113
 Outside the USA: +1 (949) 380-6100
 Fax: +1 (949) 215-4996
 Email: sales.support@microsemi.com
www.microsemi.com

©2016–2017 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.