
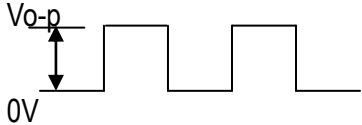
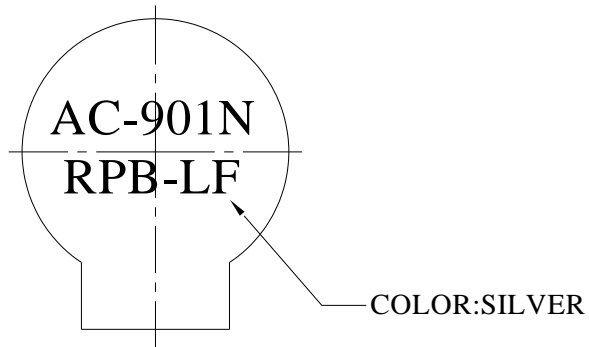


# 1. Specifications

## AC-901N-RPB-LF ( RoHS )

Items		Units	Specifications	Conditions
01	Rated Voltage	Vo-p	1.5	
02	Operating Voltage	Vo-p	1.0~3.0	
03	Consumption Current	mA (Max)	Mean 60	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak 180	
04	Direct Current Resistance	Ohm	5.5±1	
05	Sound Output	dBA (min)	85	Distance at 10cm, applying rated voltage, rated frequency square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	3200	

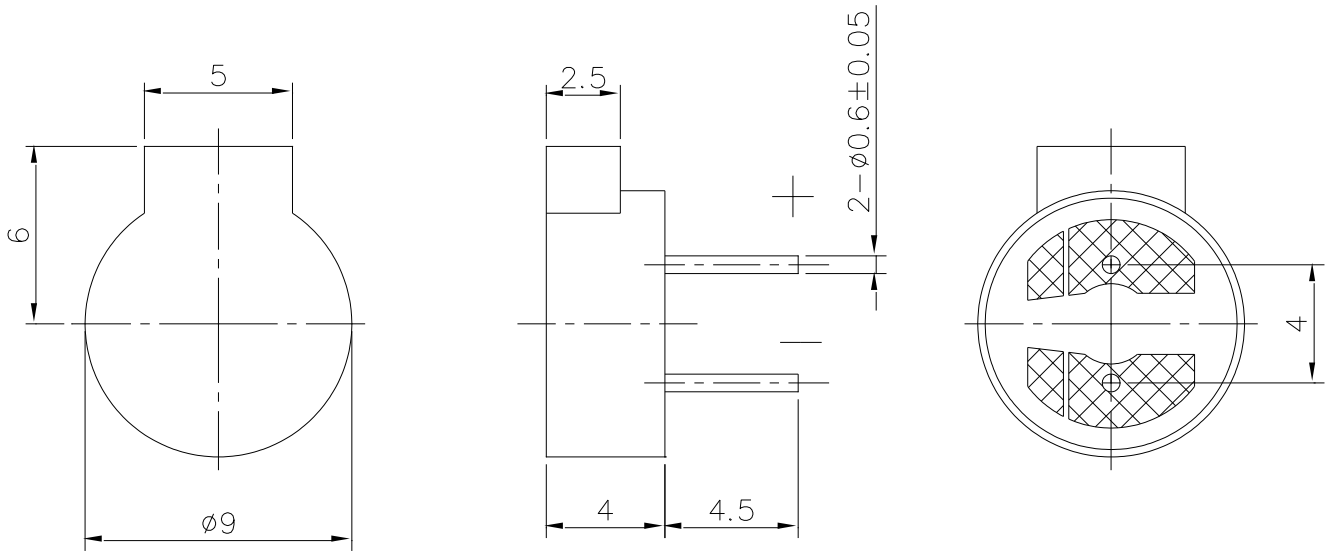

TITLE: SOUND TRANSDUCER		DRAWN: Jason	2009/10/06	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-901N-RPB-LF		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. HS-091006		CHECKED:	TOLERANCE $\pm 0.5$		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
REV 1		MATERIAL: NORYL	ONE PLACE DECIMAL $\pm$ ***		
			TWO PLACE DECIMAL $\pm$ ***		
			THREE PLACE DECIMAL $\pm$ ***		



苙翔科技股份有限公司  
 ADVANCED ACOUSTIC TECHNOLOGY CORPORATION